

INSULATED MOBILE SERVING CART - Heated or Ambient MODEL H339264AC

FEATURES AND BENEFITS:

- Our fully insulated heated or ambient mobile stainless cart is a great choice to help serve fresh hot or cold meals - on the go!
- Keeps prepared foods at serving temperatures. Ideal for constructing, holding and serving meal trays.
- Consists of (1) heated and (1) non-heated compartment. Two heated wells on top keep meals hot and easily accessible.
- Powerful, yet efficient, 1500 Watt heating system maintains the right temperature to properly hold products. Heats up to 200°F (93°C).
- Internal frames in body and doors maintain structural rigidity.
- Safety-conscious anti-microbial latches protect against spreading germs.
- Insulated field reversible doors for flexibility. Self-closing hinges stay open past 90°.
- Pan slides securely hold 16 12" x 20" pans on 2-3/4" centers; removable for easy cleaning.
- Push/pull handle with bumpers helps with maneuverability.
- Designed with 5" diameter swivel casters, front casters equipped with brakes.



H339264AC






ACCESSORIES and OPTIONS

(Available at extra cost):

- 240 Volt Service

See page B-30 for accessory details.

H339264AC

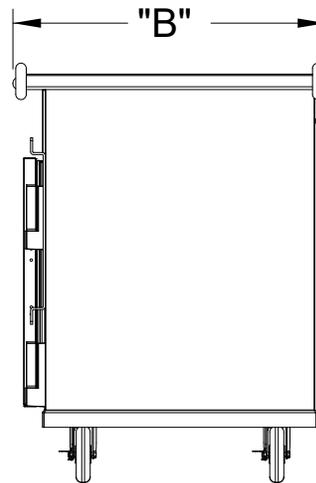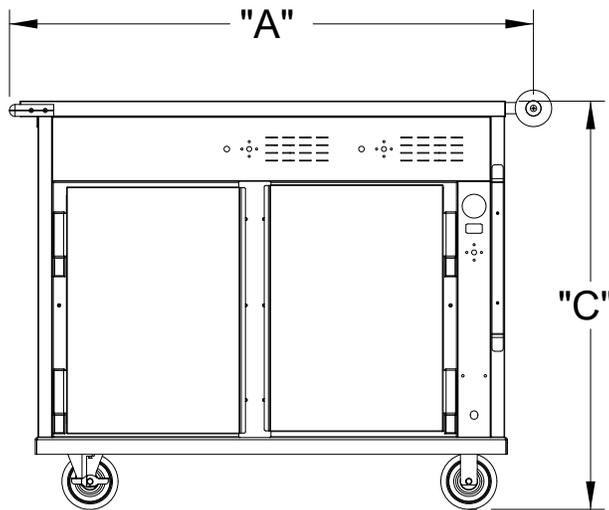

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
H339264AC	16	12 x 20	IN	46-3/4	27-7/8	37-3/8	13-7/8	21-1/4	20-1/4	LBS	225
		305 x 510	MM	1188	709	950	352	552	514	KG	102

CART:

- Consists of (1) heated and (1) non-heated compartment with removable pan slides of formed 304 stainless steel angles, 5/8" x 3/4" x 18 ga. Mounted on formed stainless steel 18 ga channel, spaced on 2-3/4" centers.
- Top: Formed 18 ga. 304-3 stainless steel.
- Body: 18 ga 304-3 stainless steel.
- Insulation (Walls, doors, base): 1" Fiberglass, thermal conductivity (K factor) is .23 at 75°F.
- Two heated wells: 12" x 20" x 4".
- Push/pull handle (1): Welded construction with donut bumpers; Welded to cabinet.

CASTERS:

- 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front casters equipped with brakes.

DOORS:

- Field reversible.
- Exterior: .036 stainless steel.
- Hinges: Heavy duty chrome plated steel; lift-off type; self-closing, stays open past 90°.

ELECTRICAL COMPONENTS:

- Power cord: Permanent, 10 ft., 14/3 ga.
- Thermostats: (3) electro-mechanical, room ambient to 220°F
- Switch: On-Off rocker type.
- Heater: (3) 150 Watt heater in hot cabinet. (1) 500 Watt heater under each well.

POWER REQUIREMENTS:

- 1500 Watts, 120 Volts, 60 Hz., single phase, 12 Amps., 15 Amp. service.

SHORT FORM SPECIFICATIONS

Cres Cor Insulated Mobile Serving/Tray Make-Up Cabinet Model H339264AC. (2) Compartment, (1) Heated, (1) Non-heated. Field Reversible doors. 1" Fiberglass insulation in walls, doors, and bottom. (3) 150 Watt and (2) 500 Watt heaters, 120 Volts, adjustable heat. Removable pan supports for 16 12 x 20" pans. (2) 5" swivel and (2) 5" rigid modulus casters, Delrin bearings. Load capacity 250 lbs. each.



5925 Heisley Road • Mentor, OH 44060-1833
 Phone: 877/CRESCOR • Fax: 440/350-7267
 www.crescor.com

© Crescent Metal Products, Inc. 2021 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Made in America Since 1936