DUAL TEMP REFRIGERATOR/FREEZER

Model: 1RFXNHD

1-Section Extra-Wide Dual Temp Over/Under Reach-In Refrigerator/Freezer (0°F)

1RFXNHD - Stainless steel front, aluminum end panels and interior

1RFXNSAHD - Stainless steel exterior, aluminum interior

1RFXNSSHD - Stainless steel exterior and interior




Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Shallow depth (consult factory)
Add'l epoxy-coated steel shelves	Hinged glass doors
Chrome or stainless steel shelves	Special electrical req. (consult factory)
Heavy-duty pilaster strips	Correctional Facility Options
Rehinging of doors (consult factory)	One way security screws
Pan slide assemblies	Locking hasp (lock not included)
Wine rack (refrigerator section)	Stainless steel mesh cover
Adjustable legs	Coverless hinges
Custom laminates	

Consult factory for other model configurations, options and accessories.



Standard Model Features

REFRIGERATION SYSTEM

Separate, self contained, performance-rated refrigeration systems

Natural, environmentally-safe, high-efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Freezer section: standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in each door

Heavy-duty, epoxy-coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

Electronic controllers w/digital display & hi-low alarm

Automatic electric defrost (freezer section)

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	16/16 (453/453 cu I)
Width, Overall (in.)	36 1/4 (921 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth [less doors] (in.)	32 (813 mm)
Depth [doors open 90°] (in.)	66 (1676 mm)
Clear Door Width (in.)	29 5/8 (752 mm)
Clear Half Door Height (in.)	27 1/2 (699 mm)
Height, Overall (in.) (incl. 5" casters)	82 1/4 (2089 mm)
No. of Half Doors	2
No. of Shelves	4
Shelf Area (sq. ft.)	24.4 (2.3 sq m)
Tray Slide Capacity (per half section)	11 ea.
REFRIGERANT DATA	

Condensing Unit Size (H.P.)	1/4, 1/3
Capacity (BTU/Hr)*	1940 / 1590

ELECTRICAL DATA

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3/3
Total Amps (int'l)	2.7 (2.9) / 5.9 (3.1)
Defrost Amps (int'l)	3.9 (2.2)
(2) 10 ft. Cord/Plug [attach.] (int'l)	Yes (No)

SHIPPING DATA

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	42 (1067 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	87 (2464 cu I)
Weight Std - Crated (lbs.)	555 (252 kg)
Weight SS - Crated (lbs.)	675 (306 kg)

* Rating @ +25°F evaporator, 90°F ambient (refrigerator)

* Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with two NEMA-5-15P Plugs (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

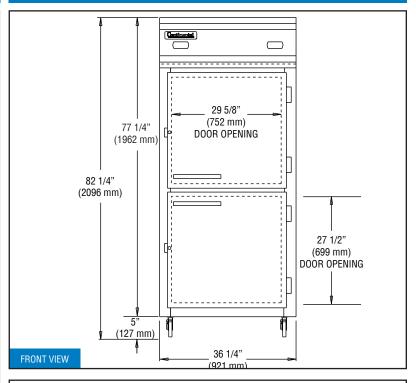

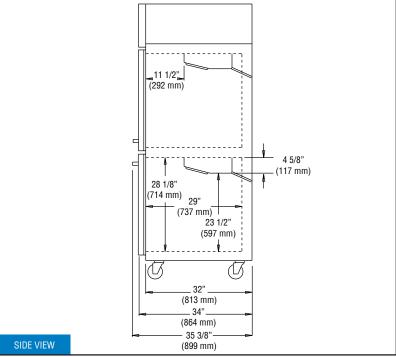

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.