BASE UNDERCOUNTER REFRIGERATOR

Model: RA60N-U-D

Natural Refrigerant R-290 Model

60" Base Undercounter Refrigerator with Drawers (Door on Smaller Width Section)

Heavy gauge #300 Series stainless steel top, stainless steel front and end panels, galvanized steel rear and grill and aluminum interior.



Options and Accessories

(upcharge and lead times may apply)

| Stainless steel interior | Door/drawers locks |
|---|---|
| Stainless steel back | Front breathing |
| Overshelves (single or double) | Drawer in lieu of door section above the condensing unit* |
| Add'l epoxy-coated or stainless steel shelves (smaller full door section) | Condensing unit left (standard on right) |
| Adjustable legs | |

Consult factory for other model configurations, options and accessories.

*Drawer section above condensing unit holds (1) 12 x 20 x 6 pan.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

| Project Name: | |
|------------------|-----------|
| | |
| Model Specified: | |
| | |
| Location: | |
| Item No: | Quantity: |

Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA #:

Performance-rated refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant¹

Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

Expansion valve system

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome drawer/door handles

Spring loaded, self closing doors (smaller section and over condensing unit)

Magnetic snap-in drawer/door gaskets

Stainless steel roll-out drawers (larger section)

Completely enclosed, vented and removable rear and side grills

(8) 1 3/8" diameter plate casters mounted on heavy-duty support plates (easily field installed)

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm

Front breather air divider (field installed)

Electronic control, off-cycle defrost

Refrigerated section w/door above the condensing unit

Field rehingeable doors

(smaller section and over condensing unit)

¹ R-290 refrigerant meets all federal and state regulatory requirements.

<u>NOTE</u>: Models come standard with a door over the condensing unit, a smaller width door (left section) and two tier drawers (center section). A drawer over the condensing unit is an option. The option of having the left/center drawers located in the opposite sections <u>MUST</u> be indicated at the time of ordering.

APPROVAL:

Model Specifications

| DIMENSIONAL DATA | |
|---|---------------------|
| Net Capacity (cu. ft.) | 19 (538 cu I) |
| Width, Overall (in.) | 60 3/16 (1529 mm) |
| Depth, Overall (in.) (incl. handles & bumpers) | 36 5/16 (922 mm) |
| Height, Overall (in.) (incl. 1 3/8" plate casters) | 31 3/4 (806 mm) |
| Shelf Area (sq. ft.) | 5.6 (.5 sq m) |
| No. of Shelves | 2 |
| No. of Drawers | 2 |
| No. of Full Doors | 1 |
| No. of Half Doors | 1 |
| Interior Depth (in.) (above condenser) | 30 (762 mm) |
| Interior Height (in.) (smaller section) | 26 (660 mm) |
| Interior Height (in.) (above condenser) | 12 1/2 (318 mm) |
| Interior Width (in.) (smaller section) | 17 (1422 mm) |
| Interior Width (in.) (above condenser) | 17 (1422 mm) |
| REFRIGERANT DATA | |
| Condensing Unit Size (H.P.) | 1/4+ |
| Capacity (BTU/Hr)* | 3100 |
| ELECTRICAL DATA | |
| Voltage (int'l) | 115/60/1 (220/50/1) |
| Total Amps (int'l) | 4.8 (2.3) |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No) |

| SHIPPING DATA | |
|-----------------------|------------------|
| Weight (lbs.) | 405 (184 kg) |
| Height - Crated (in.) | 43 3/4 (1111 mm) |
| Width - Crated (in.) | 62 (1575 mm) |
| Depth - Crated (in.) | 47 (1194 mm) |
| | |

DRAWER PAN CONFIGURATIONS

Two Tier: (2) 12 x 20 x 6 pans per drawer

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2019. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

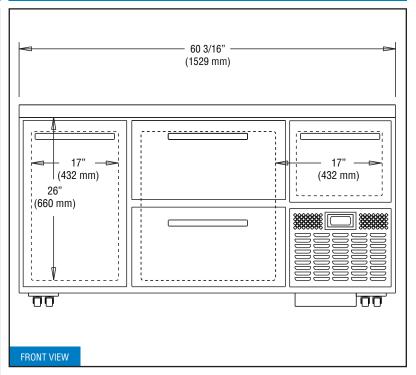

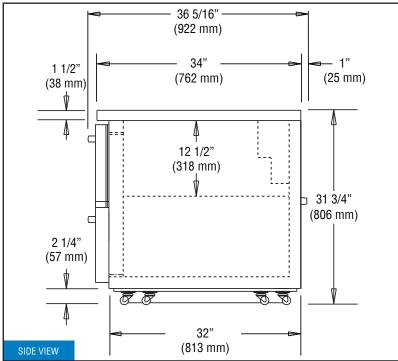

NOTE: For proper operation, the area under and in front of the cabinet **must** not be obstructed in any way.

^{*} Rating @ +25°F evaporator, 90°F ambient