# **DESIGNER LINE REFRIGERATOR**

### Model: D1RSN

Natural Refrigerant R-290 Model



# 1-Section Reach-In Refrigerator Shallow Depth

D1RSN - Stainless steel front, aluminum end panels and interior

D1RSNSA - Stainless steel exterior, aluminum interior

D1RSNSS - Stainless steel exterior and interior



## **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel case back	Correctional Facility Options
Additional epoxy coated steel shelves	One way security screws
Chrome or stainless steel shelves	Locking hasp (lock not included)
Wine rack	Stainless steel mesh cover
Caster options	Coverless hinges
Custom laminates	Special electrical requirements (consult factory)

Consult factory for other model configurations, options and accessories.





Project Name:		
Model Specified:		
Location:		
Lucation.		
Item No:	Quantity:	
	-	
AIA #:	SIS #:	

# **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Self contained, performance rated refrigeration system (coil in the cabinet zone)

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Automatic, electric condensate evaporator

Expansion valve system

#### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handle

Cam action, lift off hinges

Self-closing door

Magnetic snap-in Santoprene™ door gasket

Cylinder lock in door

Heavy duty pilaster strips

Heavy duty, epoxy coated steel shelves

Adjustable 6" stainless steel legs

#### **MODEL FEATURES**

LED interior lighting

Electronic control, off cycle defrost

Rehinging of door (in the field)

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

# **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cubic feet)	16 (453 cu I)
Width, Overall (inches)	26 (660 mm)
Depth, Overall (inches) (including handle)	29 1/4 (743 mm)
Depth (inches) (less door)	25 7/8 (657 mm)
Depth (inches) (door open 90°)	49 1/2 (1257 mm)
Clear Door Width (inches)	19 3/8 (492 mm)
Clear Door Height (inches)	58 5/8 (1489 mm)
Height, Overall (inches) (including 6" legs)	83 1/4 (2115 mm)
Number of Doors	1
Number of Shelves	3
Shelf Area (square feet)	20.4 (1.9 sq m)

#### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/4
Capacity (BTU per hour)*	1940

#### **ELECTRICAL DATA**

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	5.9 (3.9)
10 ft. Cord/Plug [attached] (International)	Yes (No)

#### **SHIPPING DATA**

Height - Crated (inches)	85 1/2 (2172 mm)
Width - Crated (inches)	31 5/8 (803 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	65 (1841 cu I)
Weight Std - Crated (pounds)	275 (125 kg)
Weight SS - Crated (pounds)	330 (150 kg)

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





Equipped with one NEMA-5-15P Plug (varies by country)

# Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579 539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com Due to our continued efforts in developing innovative products, specifications subject to change without notice. PROUDLY DESIGNED & ASSEMBLED

IN THE U.S.A.

# **Model Plan Views**

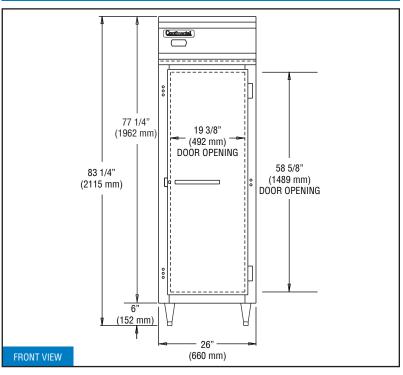

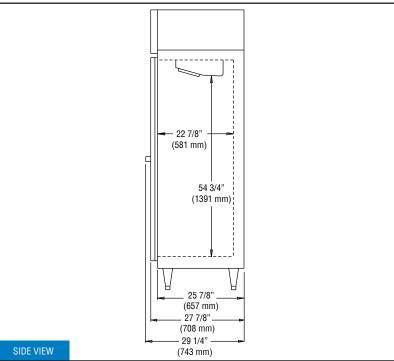

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.

Intertek