# **DESIGNER LINE REFRIGERATOR**

# **Model: D2RENHD**

Natural Refrigerant R-290 Model



# 2-Section Extra-Wide Reach-In Refrigerator with Half Doors



ENERGY STAR® Qualified Commercial Refrigerator

D2RENAHD - Stainless steel front, aluminum end panels and interior D2RENSAHD - Stainless steel exterior, aluminum interior D2RENSSHD - Stainless steel exterior and interior




## **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel case back	Shallow depth
Statilless steel case back	Silallow depth
Add'l epoxy-coated steel shelves	Hinged glass doors
Chrome or stainless steel shelves	Special electrical req. (consult factory)
Rehinging of doors (consult factory)	Correctional Facility Options
Pan slide assemblies	One way security screws
Wine rack	Locking hasp (lock not included)
Casters	Stainless steel mesh cover
Custom laminates	Coverless hinges
Full doors	

Consult factory for other model configurations, options and accessories.



# **Standard Model Features**

## REFRIGERATION SYSTEM

Self contained, performance-rated "plug" refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant<sup>1</sup>

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

# **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in each door

Heavy-duty, epoxy-coated steel shelves

Adjustable 6" stainless steel legs

# **MODEL FEATURES**

LED interior lighting

Electronic controller w/digital display & hi-low alarm

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

# **Model Specifications**

#### **DIMENSIONAL DATA** 52 (1472 cu I) Net Capacity (cu. ft.) Width, Overall (in.) 57 (1448 mm) Depth, Overall (in.) (incl. handles) 35 3/8 (899 mm) Depth (in.) (less doors) 32 (813 mm) Depth (in.) (doors open 90°) 58 (1473 mm) Clear Door Width (in.) 21 7/8 (556 mm) Clear Half Door Height (in.) 27 1/2 (699 mm) 83 1/4 (2115 mm) Height, Overall (in.) (incl. 6" legs) No. of Doors 4

6

11

40.8 (3.8 sq m)

## **REFRIGERANT DATA**

Tray Slide Capacity (per half section)

No. of Shelves Shelf Area (sq. ft.)

Condensing Unit Size (H.P.)	1/3+
Capacity (BTU/Hr)*	2560

## **ELECTRICAL DATA**

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	6.9 (4.9)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

## **SHIPPING DATA**

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	64 (1626 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	133 (3766 cu I)
Weight Std - Crated (lbs.)	575 (261 kg)
Weight SS - Crated (lbs.)	605 (274 kg)

<sup>\*</sup> Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









#### © Copyright 2019. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

# **Model Plan Views**

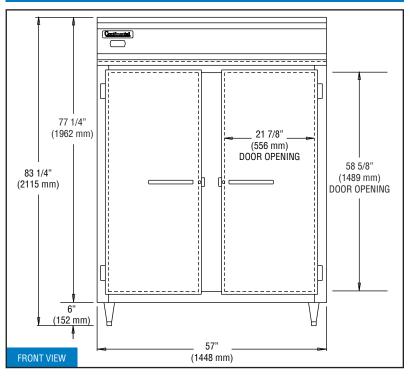

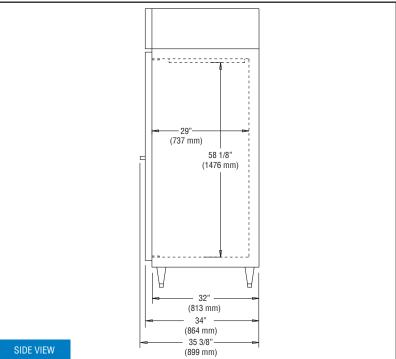

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.