

DESIGNER LINE PASS THRU FREEZER (0°)

Model: **D2RFENPTHD**

Natural Refrigerant R-290 Model

2-Section Dual Temp Extra-Wide Pass-Thru Refrigerator/Freezer (0°F) with Half Doors

D2RFENPTHD - Stainless steel front, aluminum end panels and interior

D2RFENSAPTHD - Stainless steel exterior, aluminum interior

D2RFENSSPTHD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

| | |
|---------------------------------------|----------------------------------------------------------------------------------|
| Additional epoxy coated steel shelves | Increased refrigeration systems |
| Chrome or stainless steel shelves | Special electrical req. (consult factory) |
| Universal pan slides | Correctional Facility Options |
| Rehinging of doors (consult factory) | <ul style="list-style-type: none">One way security screws |
| Wine rack (refrigerator section) | <ul style="list-style-type: none">Locking hasp (lock not included) |
| Casters | <ul style="list-style-type: none">Stainless steel mesh cover |
| Custom laminates | <ul style="list-style-type: none">Coverless hinges |

Consult factory for other model configurations, options and accessories.

Continental
Refrigerator



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Separate, self contained, performance rated "plug" refrigeration systems

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

Heavy duty pilaster strips

6" adjustable stainless steel legs

MODEL FEATURES

LED interior lighting

Electronic controllers with digital display & hi-low alarm

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

Off-cycle defrost (refrigerator section)

Automatic electric defrost (freezer section)

APPROVAL:

Model Specifications

DIMENSIONAL DATA

| | |
|----------------------------------------------------|------------------|
| Net Capacity (cubic feet) | 22 (623 cu l) |
| Width, Overall (inches) | 28 1/2 (724 mm) |
| Depth, Overall (inches) (including handles) | 38 3/4 (984 mm) |
| Depth (inches) (less doors) | 32 (813 mm) |
| Depth (inches) (doors open 90°) | 84 (2134 mm) |
| Clear Door Width (inches) | 21 7/8 (556 mm) |
| Clear Door Height (inches) | 58 5/8 (1489 mm) |
| Height, Overall (inches) (including 5" casters) | 83 1/4 (2089 mm) |
| Number of Doors | 4 |
| Number of Shelves | 6 |
| Shelf Area (square feet) | 20.4 (1.9 sq m) |
| Tray Slide Capacity | 24 |

REFRIGERANT DATA

| | |
|-----------------------------|------------|
| Condensing Unit Size (H.P.) | 1/4, 1/2 |
| Capacity (BTU per hour)* | 1940, 1590 |

ELECTRICAL DATA

| | |
|------------------------------------------------|----------------------|
| Voltage (International) | 115/60/1 (220/50/1) |
| Feed Wires (including ground) | 3 |
| Total Amps (International) | 5.5 (3.9), 6.9 (4.2) |
| Defrost Amps (International) | 4.3 (2.2) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |

SHIPPING DATA

| | |
|------------------------------|------------------|
| Height - Crated (inches) | 85 1/2 (2172 mm) |
| Width - Crated (inches) | 31 5/8 (803 mm) |
| Depth - Crated (inches) | 42 (1067 mm) |
| Volume - Crated (cubic feet) | 65 (1841 cu l) |
| Weight Std - Crated (pounds) | 375 (170 kg) |
| Weight SS - Crated (pounds) | 435 (197 kg) |

* Rating @ +25°F evaporator, 90°F ambient (refrigerator)



* Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug
(varies by country)

Model Plan Views

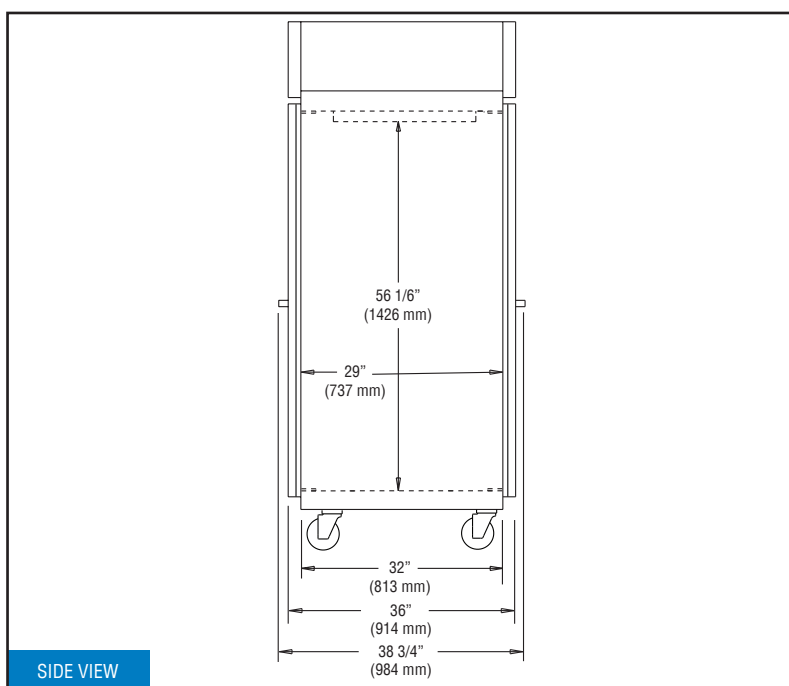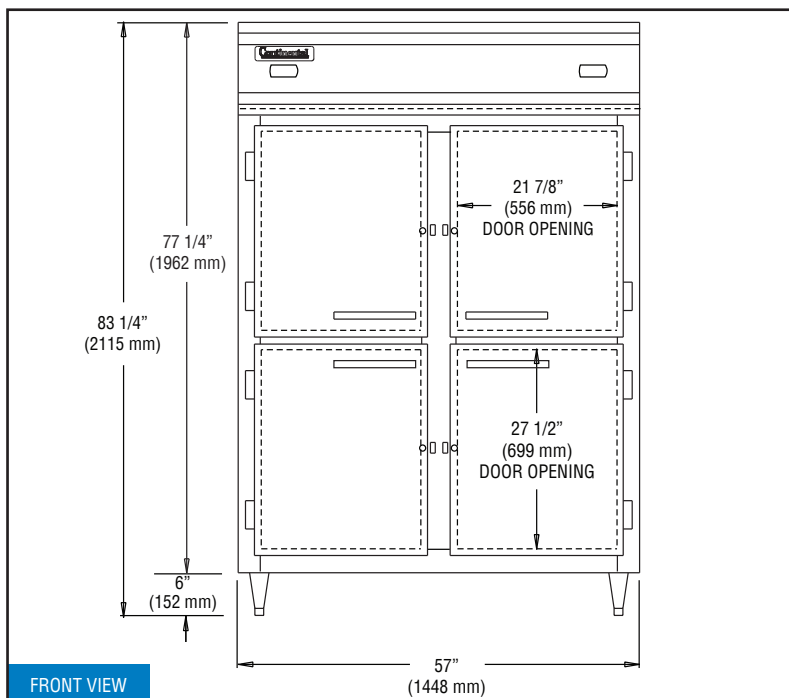

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY
DESIGNED & ASSEMBLED
IN THE U.S.A.

Intertek

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 5/11/2024