# DESIGNER LINE FISH FILE

Model: DL2RS-SS-F

## 2-Section Fish File Upright

Specially designed for the storage of fresh fish packed in crushed ice in drawer pans supplied with unit.

#300 Series stainless interior, stainless steel exterior.

Designed to maintain NSF-7 temperatures in 100°F ambient.



## **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel back	Casters
Expansion valve system	Special electrical requirements (consult factory)
Drawer locks	

Consult factory for other model configurations, options and accessories

Project Name:	
Model Specified	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

## **Standard Model Features**

#### REFRIGERATION SYSTEM

Performance-rated refrigeration system Environmentally-safe R-134a refrigerant

Automatic, electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

## **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation

Magnetic snap-in drawer gaskets

Stainless steel, easy glide roll-out drawers on heavy-duty drawer track

Smooth, polished chrome workflow drawer handles

Adjustable 6" stainless steel legs

#### **MODEL FEATURES**

Electronic controller w/digital display & hi-low alarm

1" diameter cleanout drain

(requires provisions for floor drain)

Fully welded, non-corrosive stainless steel pan per drawer w/built-in drain tubes and ice grates (drain into gutter)\*

Anti-sweat facia heaters

\* Each drawer has a removable pan, with a drain tube at the back corner.

Water from melting ice in the pan, along with moisture from the product,
drains out the storage pan through the tube, a long a trough on the interior
cabinet wall, down the sloped interior bottom, and out the cabinet through
a 1" drain tube.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

## **Model Specifications**

## **Model Plan Views**

## **DIMENSIONAL DATA**

Net Capacity (cu. ft.)	32 (906 cu I)
Width, Overall (in.)	52 (1321 mm)
Depth, Overall (in.) (incl. handles)	29 1/4 (743 mm)
Height, Overall (in.) (incl. 6" legs)	83 1/4 (2115 mm)
No. of Drawers	8

## **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/3
Capacity (BTU/Hr)*	2560

### **ELECTRICAL DATA**

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	6.5 (4.9)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

### **SHIPPING DATA**

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	648 (1626 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	133 (3766 cu I)
Weight Std - Crated (lbs.)	675 (306 kg)
Weight SS - Crated (lbs.)	710 (322 kg)

## **DRAWER PAN CONFIGURATIONS**

(8) 15 5/8 x 20 x 6 pan per drawer (can accommodate 12 x 20 perforated pans)

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


Due to our continued efforts in developing innovative products, specifications subject to change without notice.








© Copyright 2018. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

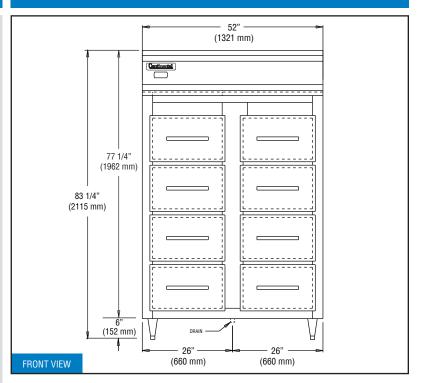

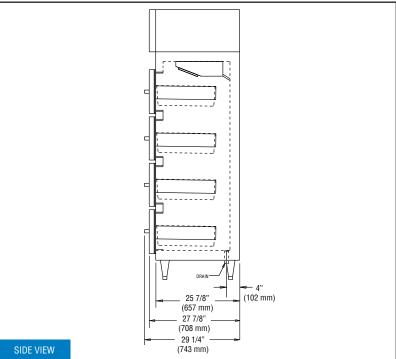

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear. 1" NPS Drain Tube must be directly piped to a building floor drain or connected to a suitable waste line.