
UNDERCOUNTER REFRIGERATOR

Model: SW48NGD-U

Natural Refrigerant R-290 Model

48" Undercounter Display Refrigerator with Hinged Glass Doors

Stainless steel front, top and end panels, aluminum back and interior.



Continental

Options and Accessories

(upcharge and lead times may apply)

| Stainless steel interior | Expansion valve system |
|----------------------------------|---|
| Stainless steel back | Door locks |
| Add'l epoxy-coated steel shelves | Special electrical requirements (consult factory) |
| Stainless steel shelves | |

Consult factory for other model configurations, options and accessories.

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant¹

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Double pane, low-e, tempered hinged glass doors

Magnetic snap-in door gaskets

Heavy-duty, epoxy-coated steel shelves

Completely enclosed, vented and removable case back

1 3/8" diameter plate casters (factory installed)

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm

LED interior lighting

2" high, bottom mounted front breather air divider

 $^{\mbox{\tiny 1}}$ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

| DIMENSIONAL DATA | |
|---|--------------------|
| Net Capacity (cu. ft.) | 13.4 (379 cu I) |
| Width, Overall (in.) | 48 (1219 mm) |
| Depth, Overall (in.) (incl. handles & bumpers) | 31 7/16 (799 mm) |
| Height, Overall (in.) (incl. 1 3/8" plate casters) | 31 13/16 (808 mm) |
| | |
| Shelf Area (sq. ft.) | 6.8 (.6 sq m) |
| Shelf Area (sq. ft.) No. of Shelves | 6.8 (.6 sq m) 2 |
| · · · / | , |
| No. of Shelves | 2 |
| No. of Shelves No. of Doors | 2 |

REFRIGERANT DATA

| Condensing Unit Size (H.P.) | 1/5 |
|-----------------------------|------|
| Capacity (BTU/Hr)* | 1625 |

ELECTRICAL DATA

| Voltage (int'l) | 115/60/1 (220/50/1) |
|-------------------------------------|---------------------|
| Total Amps (int'l) | 2.46 (1.85) |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No) |

SHIPPING DATA

| Weight (lbs.) | 265 (120 kg) |
|-----------------------|------------------|
| Height - Crated (in.) | 43 1/4 (1099 mm) |
| Width - Crated (in.) | 56 (1422 mm) |
| Depth - Crated (in.) | 37 1/4 (946 mm) |

^{*} Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2019. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

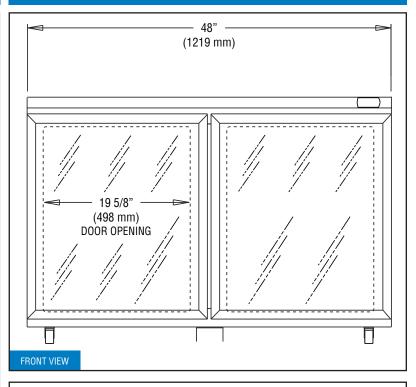

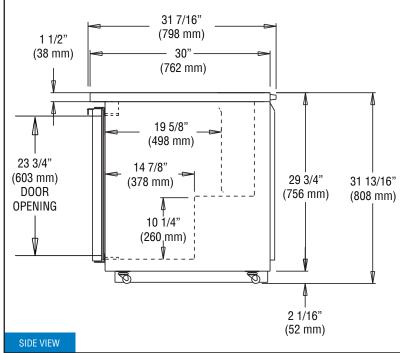

NOTE: For proper operation, the area under and in front of the cabinet **must** not be obstructed in any way.