UNDERCOUNTER REFRIGERATOR

Model: SW48NSGD-U

Natural Refrigerant R-290 Model

48" Undercounter Display Refrigerator with Sliding Glass Doors

Stainless steel front, top and end panels, aluminum back and interior.

Project Name:

Model Specified:

Location:

Item No: Quantity:

AIA #: SIS #:

Continental

Options and Accessories

(upcharge and lead times may apply)

| Stainless steel interior | Stainless steel shelves |
|----------------------------------|---|
| Stainless steel back | Door locks |
| Add'l epoxy-coated steel shelves | Special electrical requirements (consult factory) |

 ${\it Consult factory for other model configurations, options and accessories.}$

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant¹

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

Expansion valve system

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Double pane, low-e, tempered, self closing sliding glass doors

Magnetic snap-in door gaskets

Heavy-duty, epoxy-coated steel shelves

Completely enclosed, vented and removable case back

1 3/8" diameter plate casters (factory installed)

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm

LED interior lighting

2" high, bottom mounted front breather air divider

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

| DIMENSIONAL DATA | |
|---|-------------------|
| Net Capacity (cu. ft.) | 13.4 (379 cu I) |
| Width, Overall (in.) | 48 (1219 mm) |
| Depth, Overall (in.) (incl. top & bumpers) | 31 (787 mm) |
| Height, Overall (in.) (incl. 1 3/8" plate casters) | 31 13/16 (808 mm) |
| Shelf Area (sq. ft.) | 6.8 (.6 sq m) |
| No. of Shelves | 2 |
| No. of Doors | 2 |
| Interior Depth (in.) | See Drawing |
| Interior Height (in.) | 26 1/4 (667 mm) |
| Interior Width (in.) | 44 (1118 mm) |

REFRIGERANT DATA

| Condensing Unit Size (H.P.) | 1/4+ |
|-----------------------------|------|
| Capacity (BTU/Hr)* | 2073 |

ELECTRICAL DATA

| Voltage (int'l) | 115/60/1 (220/50/1) |
|-------------------------------------|---------------------|
| Total Amps (int'l) | 3.86 (1.78) |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No) |

SHIPPING DATA

| Weight (lbs.) | 265 (120 kg) |
|-----------------------|------------------|
| Height - Crated (in.) | 43 1/4 (1099 mm) |
| Width - Crated (in.) | 56 (1422 mm) |
| Depth - Crated (in.) | 37 1/4 (946 mm) |

^{*} Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2019. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

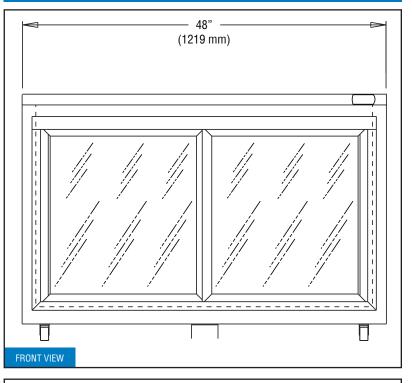

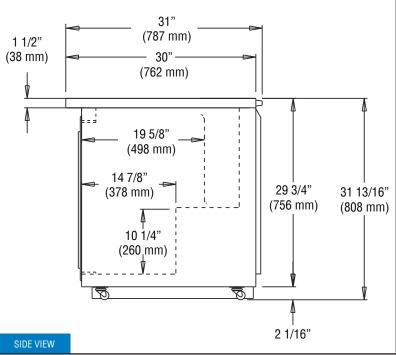

NOTE: For proper operation, the area under and in front of the cabinet **must** not be obstructed in any way.