

35 SERIES SERVICE CASE HOT FOOD CASE



MODEL NO.	DESCRIPTION	LENGTH	DEPTH	HEIGHT	VOLTAGE	AMPS	POWER CORD	EST. SHIP WEIGHT
CHS35-4	3 Wells	50"	35.5"	52"	120/240/3	4.4/11.6	NO	480
CHS35-6	4 Wells	71"	35.5"	52"	120/240/3	5.8/17.6	NO	625
CHS35-8	6 Wells	95"	35.5"	52"	120/240/3	8.7/23.1	NO	880

MODEL NUMBER PREFIX - SC = Self Contained R = Remote
 MODEL NUMBER SUFFIX - W = White B = Black S = Stainless Steel LED = LED lighting
 • Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
 • Cases are equipped with drains; check your local building codes for connection requirements.
 • Specification subject to change without notice
 IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY



Howard McCray • 831 East Cayuga St • Philadelphia, PA 19124 USA • (215) 464-6800
 1-800-344-8222 • Fax (215) 969-4890 • E-Mail: sales@howardmccray.com • www.howardmccray.com

35 SERIES SERVICE CASE HOT FOOD CASE

STANDARD SPECIFICATIONS AND OPTIONAL FEATURES

CONSTRUCTION

- Foamed in place CFC free foam
- Single pane tempered front safety glass
- Heavy gauge steel super structure
- ETL listed for safety and sanitation

INTERIOR

- White, black or stainless steel ends
- Stainless steel deck area around wells (for easy cleaning)
- Wet or dry heated individual wells
- Individual thermostatically controlled wells
- Separate drain for each well
- Flood lamp over each well

EXTERIOR

- White, black or stainless steel exterior
- Double pane rear removable doors
- Newly designed rear compression door jamb
- Heavy duty bright stainless steel top
- Vented front minimizes moisture on glass
- 1" front bumper

FINISHES

- White, black or stainless steel front and ends
- Stainless steel mirror trim
- Stainless steel heavy gauge top - 17.375" W
- White, black or stainless steel exterior rear

LIGHTING

- Individual heat lamps over each well - 175W each

ELECTRICAL REQUIREMENTS

Model No.	Wells	Volts	Phase	AMPS
CHS35-4-LED	3	120V/208V	1	4.4A/17.3A
		120V/240V	1	4.4A/20.0A
		120V/208V	3	4.4A/10.0A
		120V/240V	3	4.4A/11.6A
CHS35-6-LED	4	120V/208V	1	5.8A/23.1A
		120V/240V	1	5.8A/26.7A
		120V/208V	3	5.8A/15.3A
		120V/240V	3	5.8A/17.6A
CHS35-8-LED	6	120V/208V	1	8.7A/34.6A
		120V/240V	1	8.7A/40.0A
		120V/208V	3	8.7A/20.0A
		120V/240V	3	8.7A/23.1A

35 SERIES SERVICE CASE HOT FOOD CASE

TECHNICAL DATA

Model No.		CHS35-4	CHS35-6	CHS35-8
Length		50"	71"	95"
Height		52"	52"	52"
Depth		35.5"	35.5"	35.5"
# of wells		3	4	6
(Dimensions are +/- 1/4")				
Voltage - standard		120/240	120/240	120/240
Phase		3	3	3
Amperage		4.4/11.6	5.8/17.6	8.7/23.1
Voltage - optional		120/240	120/240	120/240
Phase		1	1	1
Amperage		4.4/20	5.8/26.7	8.7/40
Voltage - optional		120/208	120/208	120/208
Phase		3	3	3
Amperage		3.8/10	5.8/15.3	8.7/20
Voltage - optional		120/208	120/208	120/208
Phase		1	1	1
Amperage		4.4/17.3	5.8/23.1	7.5/34.6
Exterior color		W, B, S	W, B, S	W, B, S
Interior color		W, B, S	W, B, S	W, B, S
Floors		W, B, S	W, B, S	W, B, S
# of top rear doors		2	2	4
Front viewing area		21"	21"	21"
Bottom Storage		NO	NO	NO
Door size		19.56" x 19.25"	29.81" x 19.25"	19.56" x 19.25"
Shipping Info				
Height		58"	58"	58"
Depth		44"	44"	44"
Length		61"	87"	109"
Gross weight		450	595	850
Cubic feet		90	128	164

Prefix

SC = Self Contained
R = Remote

Suffix

B = Black
W = White
S = Stainless Steel
LED = LED lighting


- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice

(ALL WHITE OR ALL BLACK, NO EXTRA CHARGE—IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY)


35 SERIES SERVICE CASE HOT FOOD CASE

DRAWINGS • SIDE VIEW • PLAN VIEW


3 WELLS

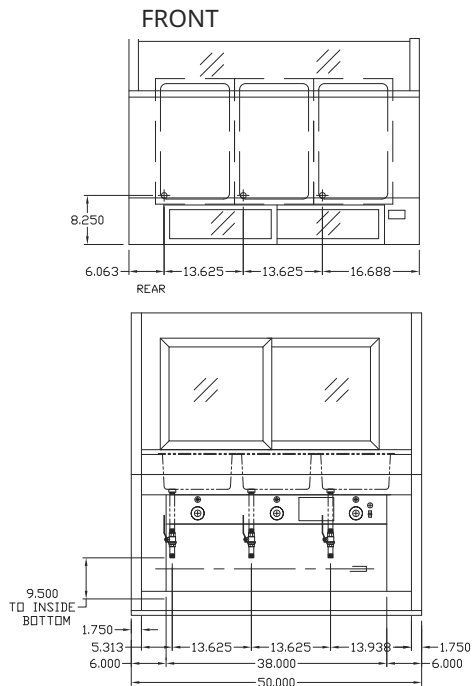

CROSS SECTION

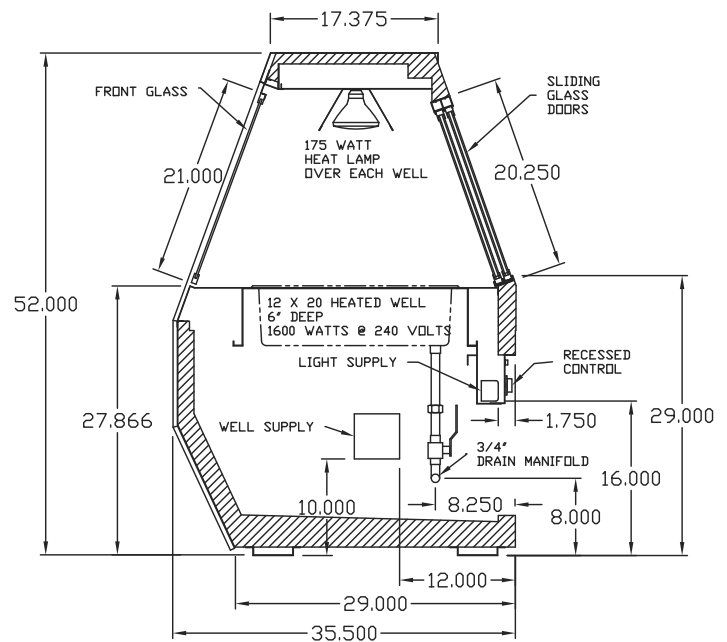

4 WELLS

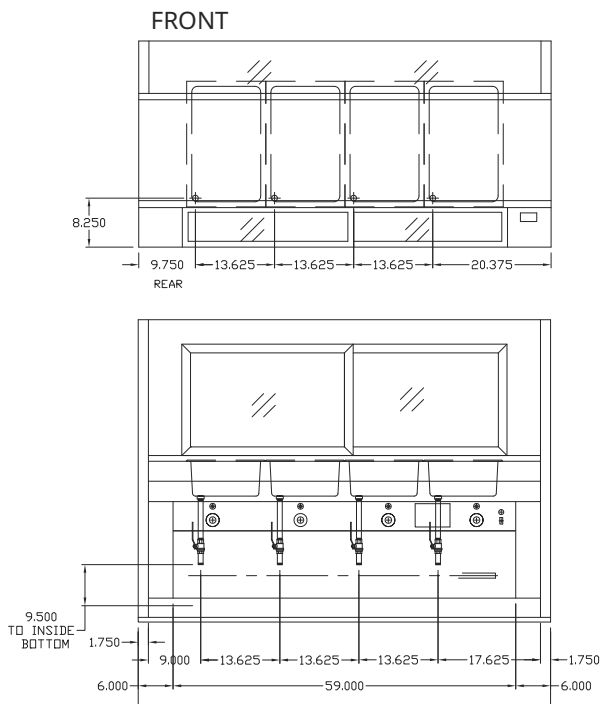

6 WELLS

