



*Brewing Excellence*

Job \_\_\_\_\_ Item No. \_\_\_\_\_

## THERMAL SERVERS

□ 7757 □ 7757-D □ 7878-THS □ 7874-THS □ 7885-THS  
□ 7752NS-TGB □ 7750NS-TGB

### DESCRIPTION

For added convenience, coffee can be brewed directly into the extremely transportable thermal servers that have the special Brew-Thru Lids. Units that have the easy-to-read front mounted sight gauges allow for close monitoring of your coffee level.

#### **7757 & 7757-D (Deluxe)**

Single Thermal Server - 1.5 Gallon  
with sight glass

#### **7878-THS**

1.9 liter (64 oz.) Hand Held Pour  
Brew-thru lid, stainless matte body with glass liner  
Standard Packaging - 12pk

#### **7874- THS**

1.9 liter (64 oz.) Hand-Held Pour  
Brew-thru lid, stainless steel body and liner, includes both  
regular and decaf lids included

#### **7885-THS**

1.9 liter (64 oz.) Hand-Held Pour  
Brew-thru lid, stainless steel body and liner  
Standard Packaging - 6pk

#### **7752NS-TGB**

2.5 liter (84 oz.) Thermal Server  
Without base, black brew-thru lid, gravity flow, satin black with  
sight glass  
Standard Packaging - 6pk

#### **7750NS-TGB**

2.5 liter (84 oz.) Thermal Server  
With base, black brew-thru lid, gravity flow, satin black with  
sight glass  
Standard Packaging - 6pk



7757



7878- THS



7763-ALB



7885- THS



7752NS- TGB



7750NS-TGB

Sheet No. Thermal-Srever-10/13



**Bloomfield** • 10 Sunnen Dr. St. Louis, MO 63143 U.S.A.  
Phone : (314) 678-6336 • Fax (314) 781-3636  
www.wellsbloomfield.com • Printed in the U.S.A.

**NOTE:** Specifications are subject to change without  
notice and are not intended for installation purposes.  
See installation instructions prior to installing the unit.



*Brewing Excellence*

## THERMAL SERVERS

□ 7757 □ 7757-D □ 7878-THS □ 7874-THS □ 7885-THS  
□ 7752NS-TGB □ 7750NS-TGB

### THERMAL SERVER COMPARATIVE CHART

| MODEL      | CAPACITY | BODY STYLE              | BREW THRU | LINER STYLE     |
|------------|----------|-------------------------|-----------|-----------------|
| 7757       | 2.2 L    | Brushed Stainless Steel | Yes       | Stainless Steel |
| 7757-D     | 2.2 L    | Brushed Stainless Steel | Yes       | Stainless Steel |
| 7878-THS   | 1.9 L    | Brushed Stainless Steel | Yes       | Glass           |
| 7874-THS   | 1.9 L    | Brushed Stainless Steel | Yes       | Glass           |
| 7885-THS   | 1.9 L    | Brushed Stainless Steel | Yes       | Glass           |
| 7752NS-TGB | 2.5 L    | Satin Black Plastic     | Yes       | Glass           |
| 7750NS-TGB | 2.5 L    | Satin Black Plastic     | Yes       | Glass           |

| MODEL      | BREW HEIGHT | WIDTH    |
|------------|-------------|----------|
| 7757       | 17-1/2"     | 8-1/2"   |
| 7757-D     | 17-1/2"     | 8-1/2"   |
| 7878-THS   | 12-1/4"     | 5-15/16" |
| 7874-THS   | 9-7/8"      | 5-3/8"   |
| 7885-THS   | -           | -        |
| 7752NS-TGB | 11-3/4"     | 8-5/8"   |
| 7750NS-TGB | 17-1/16"    | 7-5/16"  |

### ACCESSORIES

Shown with  
optional 7752-TGB



Model 3871-NS-SRVST


Shown with  
optional 7752-TGB



FOR USE WITH 7752-TGB ONLY


Model 8857-SRVST1W

Thermal Server Lift




Model 3774BREWSTE

Plastic Drip Tray

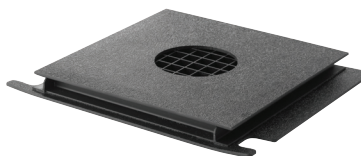

Model 3776-DRTRY-P

Stainless Steel Drip Tray

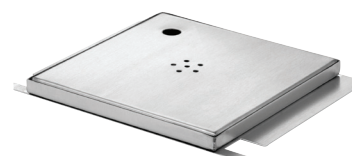

Model 3776-DRTRY-P

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Wells exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



**Bloomfield** • 10 Sunnen Dr. St. Louis, MO 63143 U.S.A.  
Phone : (314) 678-6336 • Fax (314) 781-3636  
www.wellsbloomfield.com © 2012 Bloomfield • Printed in the U.S.A.

**NOTE:** Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.