



APPLICATION:		PRODUCT NAME: 4" C/C BACKSPLASH FAUCET WITH SWIVEL GOOSENECK SPOUT	
JOB NAME:		☐ SPECIAL CONFIGURATION CHECK BASE MODEL AND OPTIONS	
QUANTITY:	ITEM NO.	MODEL:	
		☐ 3615 4" C/C BACKSPLASH W/ 12" SGN ☐ 1996 4" C/C BACKSPLASH W/ 6" SGN	
		OPTIONS OR MODIFICATIONS: ☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH ☐ IN-LINE DUAL CHECK VALVE ☐ ELBOWS ☐ VANDAL RESISTANT KIT ☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE ☐ OTHER _____	
		FEATURES: CONTROL VALVE * 4" C/C BACKSPLASH * INTERNAL SPRING LOADED CHECK VALVES * SWIVELING SEAT DISKS * HOT SIDE STEM - LEFT HAND * COLD SIDE STEM - RIGHT HAND * STAINLESS STEEL SEATS * STAINLESS STEEL SEAT SCREWS * STAINLESS STEEL HANDLE SCREWS * 1/2" SLIP JOINT KIT INCLUDED	
		SYSTEM LIMITS * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE 200 PSI MAX. STATIC * 2.20 GPM AT 80 PSI	
SHIPPING WEIGHT * 4.75 LBS			

ROUGH-IN:

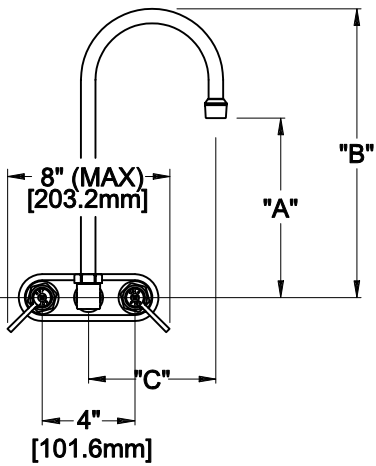

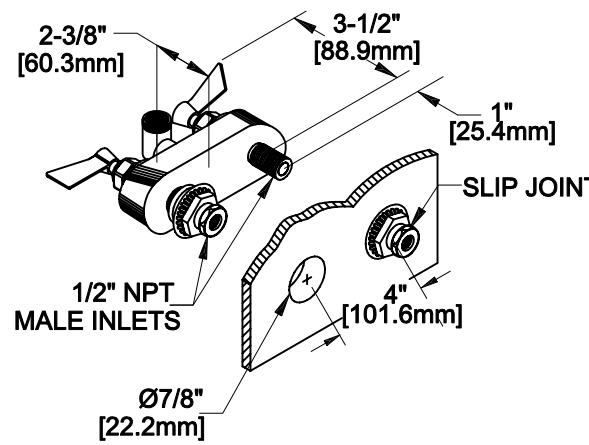

FISHER
FISHER MANUFACTURING COMPANY
TOLL FREE: 800-421-6162 - FAX: 800-832-8238
information@fisher-mfg.com - www.fisher-mfg.com

 ANSI/A112.18.1M