

APPLICATION:

PRODUCT NAME:

SWIVEL SPOUT ASSEMBLY

JOB NAME:

☐ SPECIAL CONFIGURATION
☐ CHECK BASE MODEL AND OPTIONS

QUANTITY:

ITEM NO.

MODEL:

- ☐ 3960 6" SWIVEL SPOUT
☐ 3961 8" SWIVEL SPOUT
☐ 3962 10" SWIVEL SPOUT
☐ 3963 12" SWIVEL SPOUT
☐ 3964 14" SWIVEL SPOUT
☐ 3967 16" SWIVEL SPOUT

OPTIONS OR MODIFICATIONS:

☐ OTHER _____

FEATURES

* 2.2 GPM AERATOR

RECOMMENDED SETTINGS

* 110°F AT 80 PSI


SYSTEM LIMITS

* TEMP: 40°F MIN. TO 140°F MAX.

* PRESSURE: 200 PSI MAX. STATIC

SHIPPING WEIGHT

* 0.75 LBS

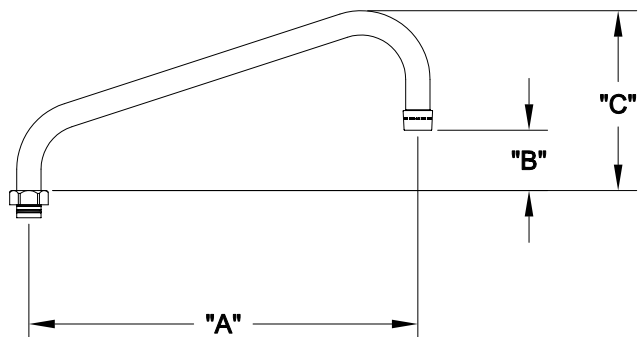

MODEL	DIM "A"	DIM "B"	DIM "C"
3960	6" [152mm]	3/8" [10mm]	4" [102mm]
3961	8" [204mm]	1-1/4" [33mm]	5" [127mm]
3962	10" [254mm]	1-1/4" [33mm]	5" [127mm]
3963	12" [305mm]	2" [51mm]	5-3/4" [145mm]
3964	14" [356mm]	2-5/8" [67mm]	6-1/4" [160mm]
3967	16" [406mm]	3-1/4" [83mm]	7" [178mm]



ANSI/A112.18.1M

FISHER

FISHER MANUFACTURING COMPANY

TOLL FREE: 800-421-6162 - FAX: 800-832-8238

information@fisher-mfg.com - www.fisher-mfg.com