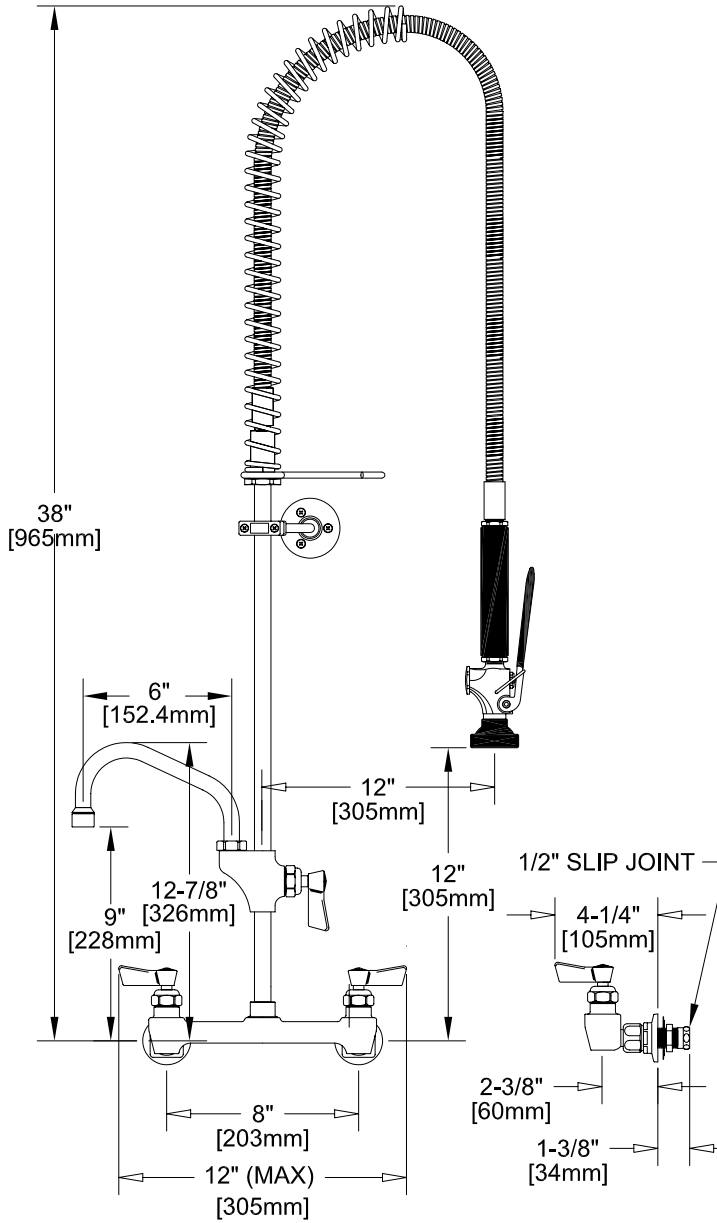



APPLICATION:	PRODUCT NAME: 8" C/C BACKSPLASH MOUNT PRE-RINSE SPRING STYLE WITH ADD-ON FAUCET
JOB NAME:	MODEL: ■ 48887 WITH 6" SWING SPOUT
QUANTITY:	ITEM NO.
 ROUGH-IN 	
OPTIONS OR MODIFICATIONS: ☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH ☐ IN-LINE DUAL CHECK VALVE ☐ BRUSH ☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE ☐ VANDAL RESISTANT KIT ☒ OTHER <u>EZ INSTALL ADAPTERS</u>	
FEATURES MAIN CONTROL VALVE * 8" C/C BACKSPLASH MOUNT * INTERNAL SPRING LOADED CHECK VALVES * SWIVELLING SEAT DISKS * HOT SIDE STEM - RIGHT HAND CHECK * COLD SIDE STEM - LEFT HAND CHECK * STAINLESS STEEL SEATS, SEAT SCREWS, AND HANDLE SCREWS HOSE * 36" LENGTH * STAINLESS STEEL END FITTINGS * STAINLESS STEEL EXTERNAL JACKET * 3-PLY FIBER REINFORCED INTERNAL RUBBER HOSE * REPAIRABLE IN-FIELD WITH SIMPLE TOOLS ULTRA SPRAY VALVE * LOWEST ENERGY USER - 1.15 GPM @ 60 PSI * CLEANS FASTER - TEST PROVEN * ENGINEERED TO LAST - NO 'O' RINGS TO LEAK * INTERCHANGEABLE - FITS ALL BRANDS WAL BRACKET * ADJUSTS FROM 2" TO 12" SYSTEM LIMITS * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE: 200 PSI MAX. STATIC SHIPPING WEIGHT * 15.0 LBS	
EPAct 2005 Compliant  ANSI/A112.18.1M	
 FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com	