

WALK - IN SPECIFICATIONS



Cooler

OVERALL SIZE: 15'-5" X 9'-8" X 9'-3 3/4"

**PANELS**  
FOAMED IN PLACE URETHANE FOAM 4"


**EXTERIOR FINISH**  
WALL: GALVALUME - EMBOSSED WHITE 26GA.  
TOP: GALVALUME - EMBOSSED 26 GA

**INTERIOR FINISH**  
WALL: GALVALUME - EMBOSSED 26 GA  
TOP: GALVALUME - EMBOSSED 26 GA


**FLOOR TYPE**  
CEIL COOLER : SCREED, VINYL 1-1/2" FOR 4" THICK WALL

**WALK-IN ACCESSORIES**  
(2) LIGHT FIXTURE, 48" KASON 1810XL LED (WITH DIODE STRIPS)


**REFRIGERATION**  
NONE

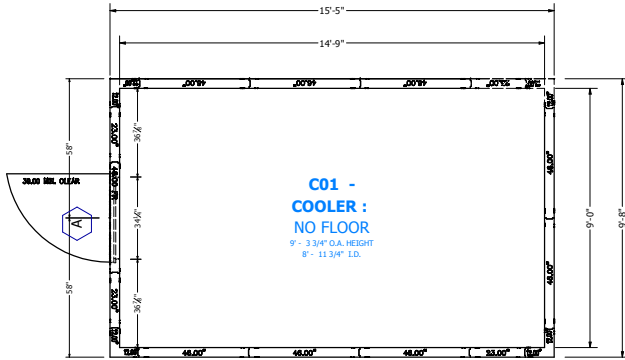

WALLS LAYOUT

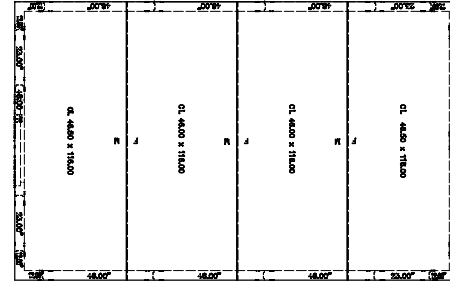

TOPS LAYOUT

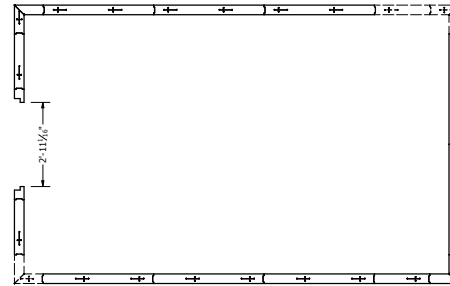

FLOORS LAYOUT

**ATTENTION**

1. DRAWING NOT INTENDED FOR INSTALLATION - DESIGN APPLICATION ONLY.
2. ALL WALK-INS ARE DESIGNED FOR INDOOR APPLICATION UNLESS NOTED OTHERWISE
3. PENETRATIONS AND SEALING OF ARE THE RESPONSIBILITY OF OTHERS
4. ALLOW 2" MINIMUM CLEARANCE WITH AIRFLOW OF 5 CFM PER 100 SQ. FT. AROUND ENTIRE PANEL SURFACES
5. GENERAL CONTRACTOR TO REFER TO DESIGN AND SPECIFICATION MANUAL FOR FLOOR DETAIL INFORMATION
6. QUARRY TILE OR CONCRETE FLOOR APPLICATIONS: METAL PANEL FACING MAY BE SUSCEPTIBLE TO STAINING DUE TO EXCESSIVE MOISTURE CREATED BY THE HYDRATION OF CONCRETE TYPE MATERIALS. IT IS ABSOLUTELY NECESSARY THAT EACH ROOM BE PROPERLY VENTILATED. SPECIAL PRECAUTIONS MUST ALSO BE TAKEN WHEN USING MURIATIC ACID DUE TO EFFECTS HYDROCHLORIC FUMES HAVE ON METAL MATERIALS
7. PANEL LAYOUT MAY CHANGE BASED ON OPTIMAL MANUFACTURING STANDARDS
8. WALK-IN TOP IS NOT DESIGNED FOR FOOT TRAFFIC OR STORAGE UNLESS NOTED OTHERWISE
9. IF CONDENSING UNIT IS LOCATED IN THE INTERIOR OF BUILDING A MINIMUM OF 24" OF CLEARANCE IS REQUIRED AROUND TOP AND SIDES
10. FLOOR, CURB, AND PIT DETAILS ARE FOR GENERAL REFERENCE ONLY. THESE DRAWINGS SHOULD NOT BE USED OR INCORPORATED IN THE DESIGN OR PREPARATION OF THE INSULATED FLOOR, SUB-SLAB OR CURBS, WITHOUT HAVING THE DESIGN REVIEWED BY A QUALIFIED ENGINEER. ALL FOOTINGS, FOUNDATION WALLS AND CONCRETE WEAR SLABS ARE THE RESPONSIBILITY OF THE BUILDING ENGINEER OR ARCHITECT.
11. THE FOAM PLASTIC USED IN THIS PRODUCT COMPLIES TO THE IBC SECTION 2603 AS FOLLOWS: FLAME SPREAD RATING: 20; SMOKE DEVELOPED RATING: 450; FLASH IGNITION TEMPERATURE RATING: 915°F; SPONTANEOUS IGNITION TEMPERATURE RATING: 350°F.

**FOR APPROVAL**  
YOU MUST REVIEW ALL NOTES, DETAILS, DIMENSIONS, FINISHES, DOORS SIZES, LOCATIONS AND SWINGS

- ☐ **APPROVAL** - NO CHANGE REQUIRED, MANUFACTURE AS DRAWN.
- ☐ **APPROVED AS NOTED** - MAKE REQUIRED CHANGES AND MANUFACTURE AS DRAWN.
- ☐ **NOT APPROVED** - DESIGN CHANGES REQUIRE DRAWING REVISION AND RESUBMISSION.

DATE: \_\_\_\_\_ BY: \_\_\_\_\_

**SMOOTH FINISH DISCLAIMER**

Panels with non-textured and/or no-profile panel finishes (smooth finishes) on the exterior and interior faces may exhibit "oil canning" and flatness imperfections on the surface. Our standard panels have a stucco embossed texture on both faces that helps to reduce oil canning and any other irregularities in the exposed surface. Please be aware of this potential situation in your specification process. Such "oil canning" and flatness issues are typical and are not covered under standard warranties.

**SPACE DESIGNATED FOR ENGINEERS SEAL**

DRAWING #: A088190R1  
UNIT #: 001  
ORDER #:


**Kolpak**  
KOLPAK INDUSTRIES, INC.  
1001 S. 10TH AVE. SUITE 100  
TAMPA, FL 33604  
(813) 241-1111

10X16X9 COOLER

**DOMINOS EQUIPMENT & SUPPLY**

DATE	REVISION	BY	DATE	REVISION	BY

SHEET #  
AD-1 of 2



FRAME:  
RECESSED 0" WITH 0" LEVELING SAND AND 0" TILE AND GROUT  
EXT: GALVALUME - EMBOSSED WHITE 26GA.  
INT: GALVALUME - EMBOSSED 26 GA

PLUG:  
EXT: GALVALUME - EMBOSSED WHITE 26GA.  
EXT: KICKPLATE, ALUM .063 DIAMOND TREAD 36" HIGH  
INT: GALVALUME - EMBOSSED 26 GA  
INT: KICKPLATE, ALUM .063 DIAMOND TREAD 36" HIGH


HARDWARE AND ACCESSORIES:  
(1) SWITCH - PILOT LIGHT INCLUDED UL (STD)  
(1) LIGHT FIXTURE - KASON 1803LED W/BULB AND GLOBE (STD)  
(1) BI-PARTING STRIP DOOR - 30.36 X 78 CLEAR-VU  
(1) THERMOMETER - DIGITAL W/20" LEAD TAD20-12V  
(1) THRESHOLD, STAINLESS STEEL 10 GA  
(1) HEATER WIRE 2.5 WATT / FT  
(1) DOOR CLOSER - KASON 1498 W/COVER AND HOOK (STD)  
(1) HANDLE - KASON 26 WITH LOCKING ASSEMBLY (STD)  
(2) HINGE - KASON 1345 ADJUSTABLE / SPRING ASSISTED (STD)

DR 34.00" x 84.00"  
FR 48.00" x 108.36"

DW-1


A

DOOR ELECTRICAL INFORMATION				
DESCRIPTION	QTY	VOLT	AMP	AMP LOAD
VAPOR PROOF LIGHT	0	230	1	0
FLUORESCENT LIGHT	0	230	1.7	0
LED LIGHT	0	230	0.4	0
HEATER WIRE	1	230	0.5	0.5
DIGITAL THERMOMETER	1	230	0.1	0.1
HEATED AIR VENT	0	230	0.1	0
HEATED VIEWPORT	0	230	0.5	0
AIR SHIELD	0	230	1.4	0
PIR MOT. BLUZZER	0	230	0.1	0
MODULARM 75/75B OR DATALARM	0	230	6	0
WIRE IN ARMS	0	230	1	0
220V VOLY, SINGLE PHASE, 50 Hz, TOTAL DOOR AMPS:				0.6

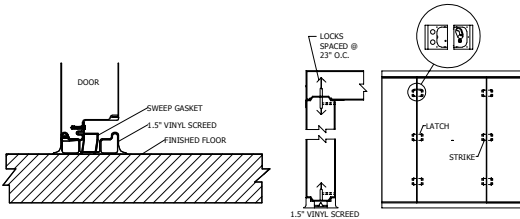

1 DETAIL - 1.5IN VSCD

Scale: NTS



2 DETAIL - PANEL CONNECTION AT 1.5IN VINYL SCREEDS

Scale: NTS

DRAWING #: AD88199R1  
UNIT #: 001  
ORDER #:

Kolpak  
KOLPAK INDUSTRIES, INC.  
10000 W. 10TH AVE., SUITE 100  
DENVER, CO 80231  
(303) 440-1000

10X16X9 COOLER

DOMINOS EQUIPMENT &  
SUPPLY

REVISION	DATE	BY	CHKD	APPROVED

SHEET #

AD-2 of 2