



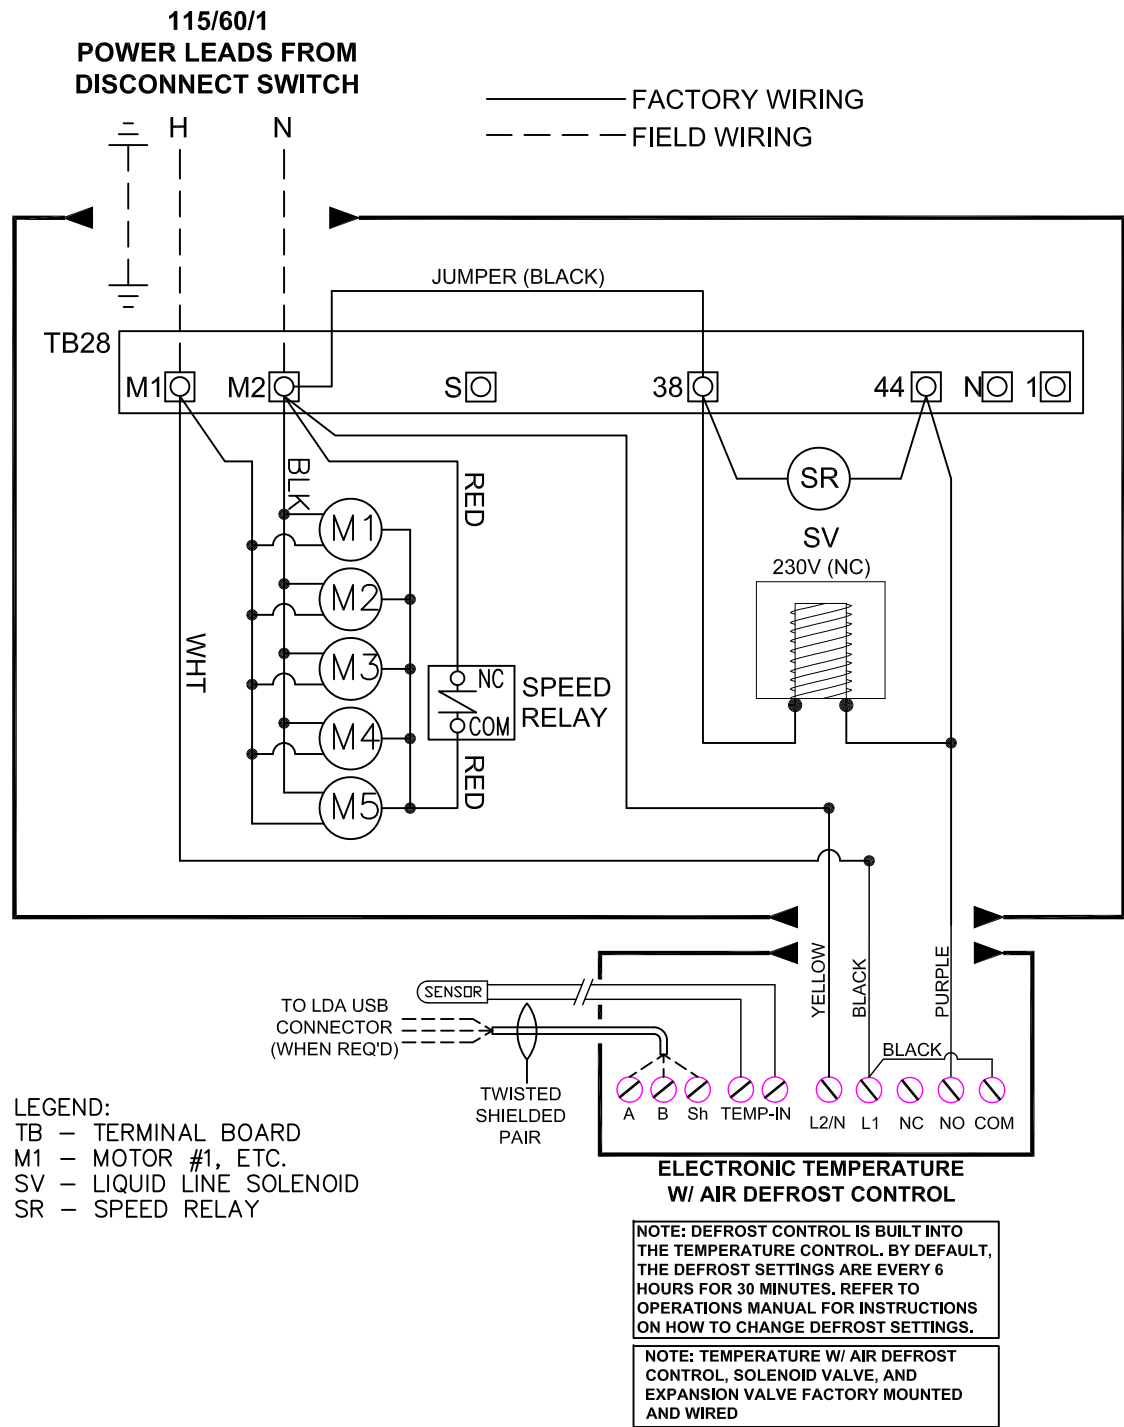

CENTER MOUNT AIR DEFROST WIRING DIAGRAM A.F.TEMP CONTROL - (115/1/60)

DEFROST	EVAPORATOR MODEL:										CONNECTION SIZES				ACCESSORIES				
	QTY	MODEL	MFG	REFRIG	BTUH	CFM	FAN 1ø		DEFROST HEATERS			SUCTION	LIQUID	WEIGHT (lbs.) NET/SHIP	DRAIN LINE	DEFROST TIMER	CONTROLS		
							AMP	V	AMP	V	ø						TSTAT	SOL VAL	EXP VAL
A	1	AMC46-141-1EC-PR-8	KPR	R448A	16,600	2,408	3.2	115				7/8" ODF	3/8" ODF	120 / 280	3/4" MPT	X	X	X	X
LEGEND: O=Off Cycle, A=Air w/Timer E=Electric Defrost											POWER SUPPLY: 115/1/60 TOTAL CONNECTED LOAD AMPS: 3.2A MINIMUM CIRCUIT AMPACITY: 15A MAXIMUM OVERCURRENT PROTECTION: 20A								

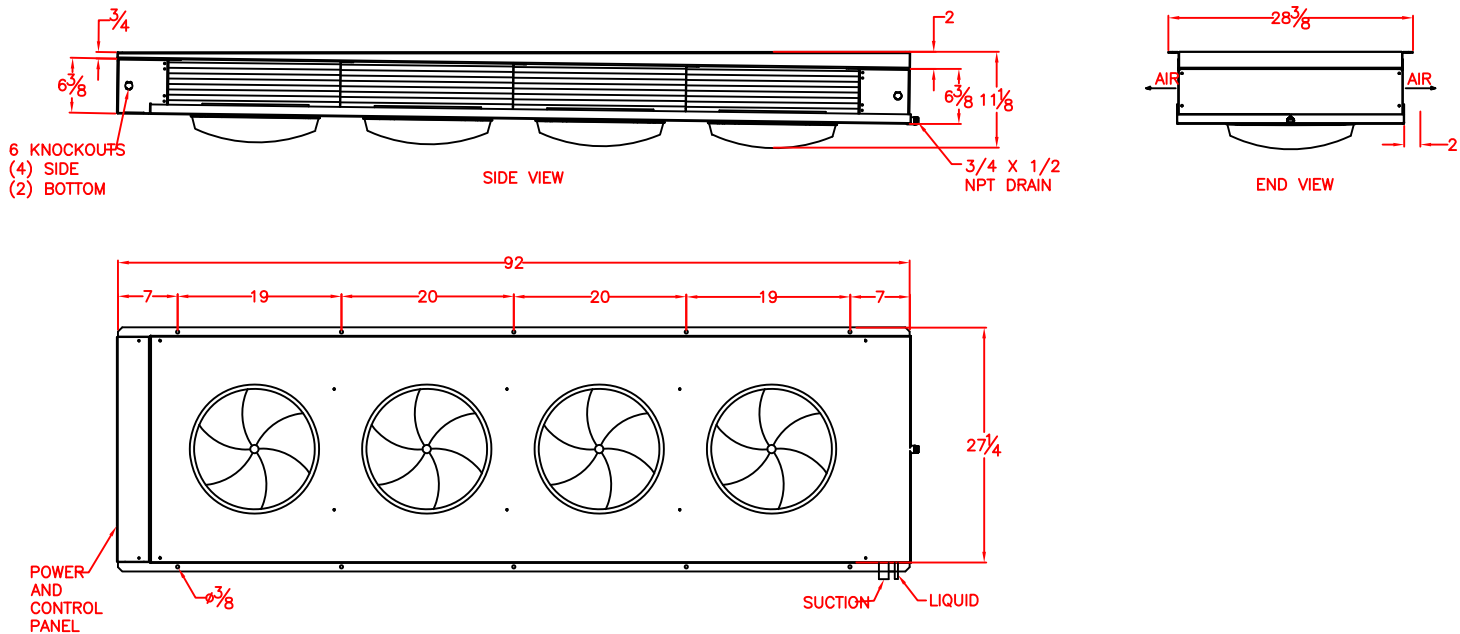

ITEMS PROVIDED INCLUDE:

1. L.L. Solenoid Valve (Installed-Evap)
2. Expansion Valve (Installed-Evap)
3. A.F. Digital Temperature Control (Installed-Evap)

DATE	REVISION RECORD	AUTH	DR	CK
AMC46-141-1EC-PR-8				
SCALE: NONE	DEALER:	DRAWN BY: DJW		
DATE: 09.30.2019		REVISED		
KOLPAK A Welbilt Brand		RDI QUOTE NO:		
2018 Tennessee Avenue North, Houston, TX 77063 (713) 847-4363 (FAX) 847-7034		DRAWING NUMBER AMC46-141-1EC-PR-8		