
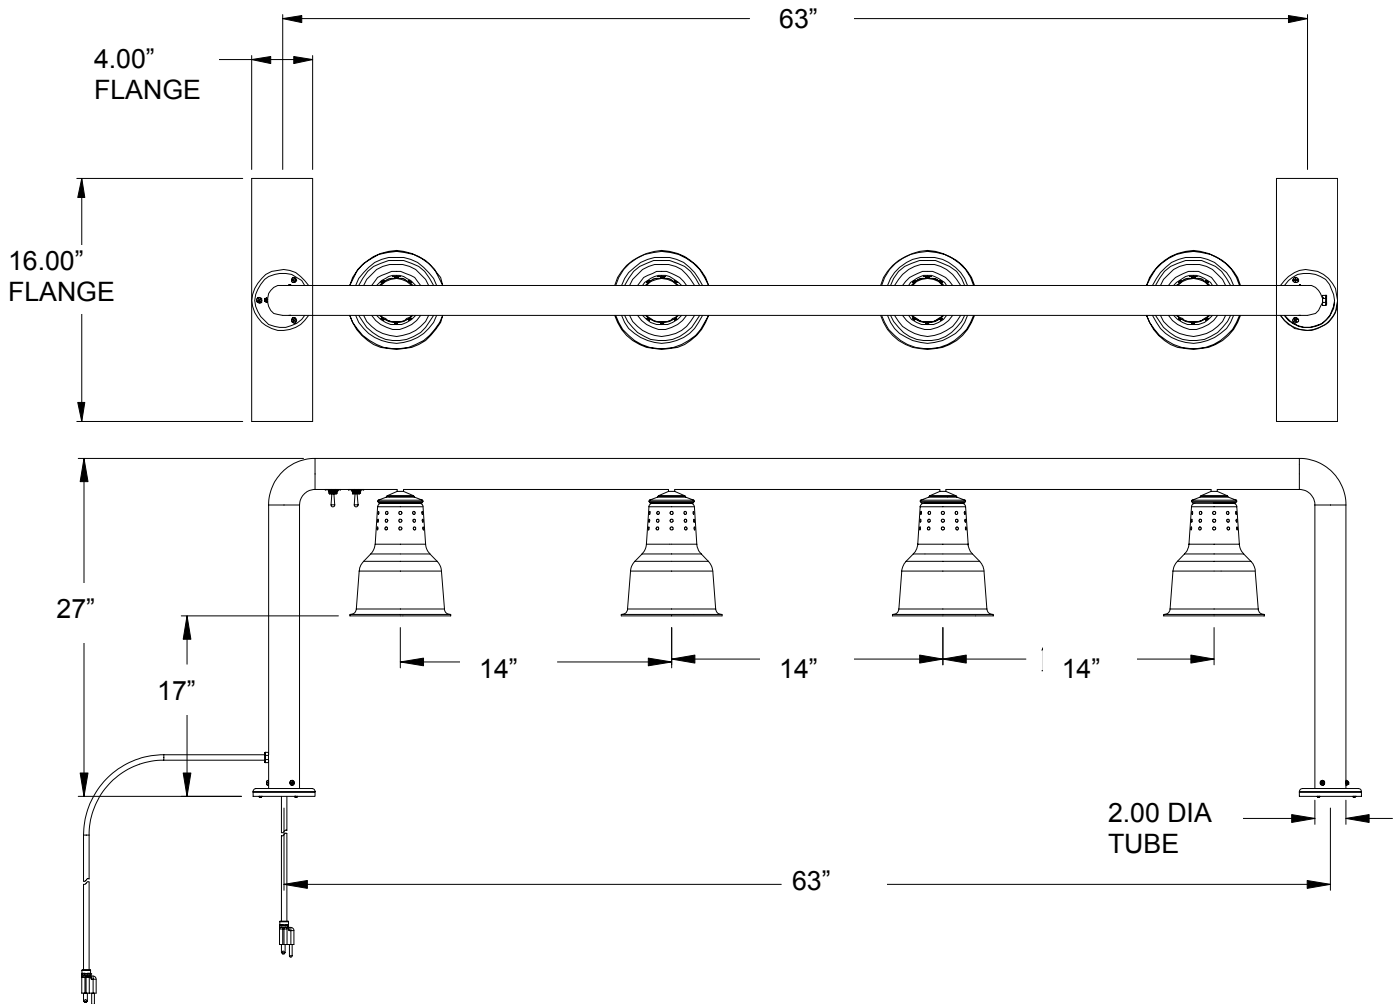


Four Fixture Mounted Lamp Units

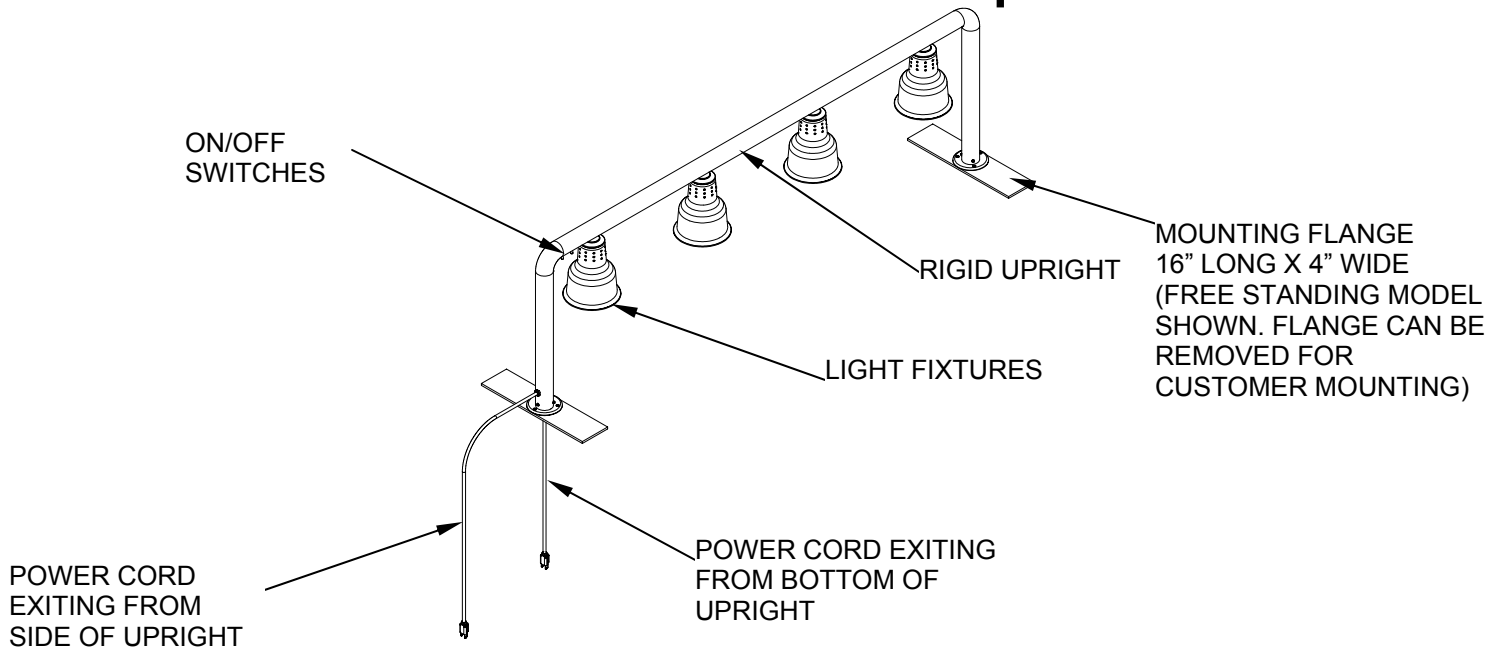

Four Fixture Mounted Lamp Units

Description: Four heat lamp fixtures with 16" x 4" flange for free standing unit. Flange can be removed by customer for mounting on either a counter or cutting board. Brass surfaces have a clear baked enamel finish. All internal components including lamp sockets and wiring are high temperature rated (200°C). Lamp body and fittings constructed of solid brass. Switches are rated for 15 amps @ 120 volts. Power cord can exit through side of upright or through bottom or upright depending on customer requirements.

Standard Models	
Model Number	Description
4FS	Four lamp fixture mounted warmer
4FS/CHROME	Four lamp fixture mounted warmer in chrome finish
4FS/COPPER	Four lamp fixture mounted warmer in copper finish
Note: Please specify power cord location, through side of upright or through bottom of Upright.	
Custom Finishes Available. Custom Sizes and lamp configurations also available. Please consult factory.	
Specifications	
Mechanical	
Parameter	Value
Light head material	Brass plated spun aluminum
Light heads	Approximately Ø6.50" x 9.0" long
Light head height from mounting surface	TBD" fixed
Upright and all fittings	Solid brass
Shipping weight	Approximately TBD pounds
Internal wiring	18 gauge Silver stranded with Teflon insulation. Rated (200° C)
Lamp socket	Glazed porcelain/nickel. Rated (200° C)
Switches	On/Off rated 15 amps @ 115 VAC
Power cord	115 VAC-18 gauge 3 conductor cable 84" long with Nema 5-15P plug (standard) 230 VAC-18 gauge 3 conductor harmonized cable 84" long with Schuko plug (standard). Cord can exit from side of upright tube or through bottom of upright tube.
Electrical	
Operating Voltage	115-230, VAC 50-60 Hz, single phase
Power	1000 watts Maximum, shatterproof design.
Operating amperage	8.5 amps (115 VAC) 4.25 amps (230 VAC)
Lamp type	Infrared 250 watts maximum, shatterproof design

Four Fixture Mounted Lamp Units

Safety Listings	
Organizations	