




DL-FM

DUAL MOUNTED HEAT LAMPS



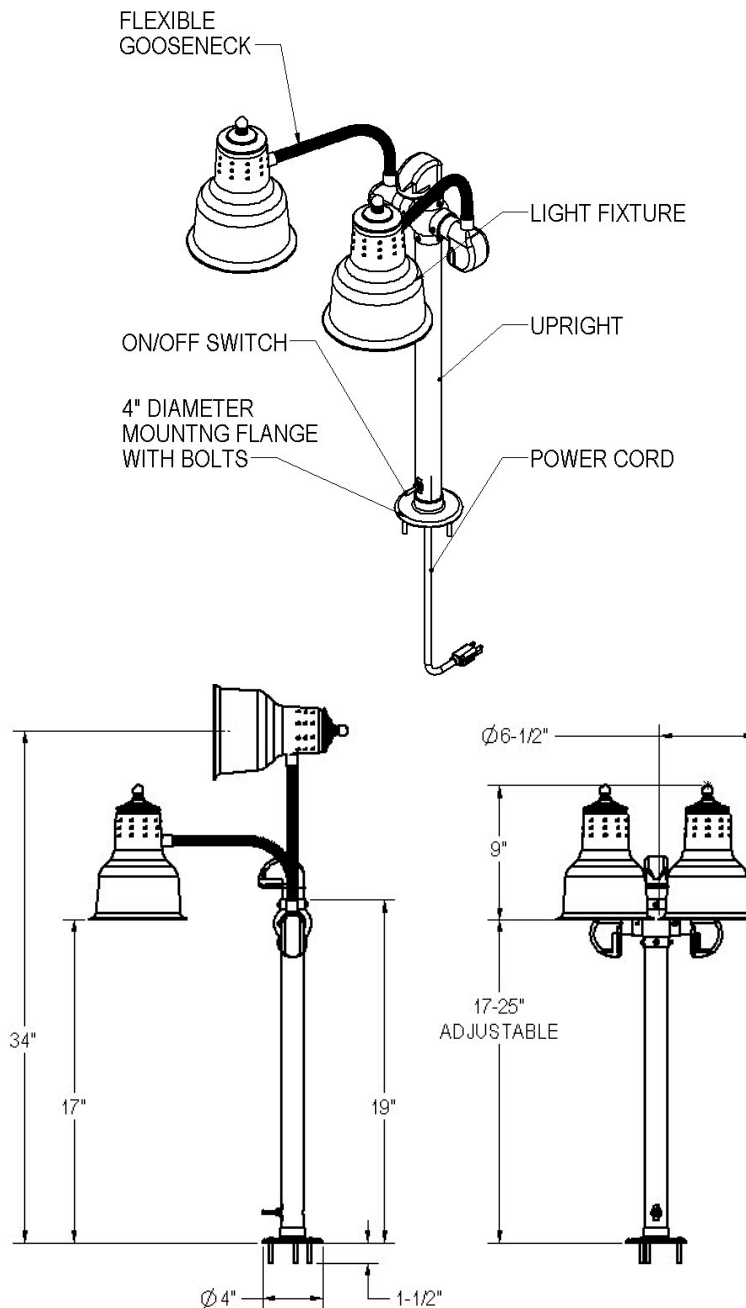

DL-FM

DUAL MOUNTED HEAT LAMPS

Description: Dual bulb heat lamp for customer mounting. Available in (6) distinct lamp shades and in (6) unique finishes. 3" diameter mounting flange with bolts attached for customer to mount to counter. Lamp bodies are made from Stainless Steel. All finishes are non-tarnishing, require no polishing and are easy to clean. All internal components including lamp sockets and wiring are high temperature rated (392°F/200°C).

Standard Models	
Model Number	Description
DLM-FM	Dual Bulb Heat Lamp for Customer Mounting
Available Finishes: Black, Stainless Steel, Chrome, Smoked Copper, Brass, Bright Copper	
Shade Styles	
<div style="display: flex; justify-content: space-around; align-items: flex-end;"> <div style="text-align: center;"> 200 5-1/2" X 7-1/2" Diameter X Length 140 mm X 191 mm </div> <div style="text-align: center;"> 300 7-1/8" X 7-1/2" Diameter X Length 181 mm X 191 mm </div> <div style="text-align: center;"> 500 7-1/4" X 7-3/8" Diameter X Length 184 mm X 187 mm </div> <div style="text-align: center;"> 600 6-1/2" X 8" Diameter X Length 165 mm X 203 mm </div> <div style="text-align: center;"> 700 7" X 8" Diameter X Length 178 mm X 203 mm </div> <div style="text-align: center;"> 900 6-1/2" X 8-1/2" Diameter X Length 165 mm X 216 mm </div> </div>	
Note: Please specify power cord location, through side of upright or through bottom of Upright.	
Specifications	
Mechanical	
Light head material	Aluminum
Light head	Varies depending on which model chosen. See shade styles
Light head height from mounting surface	Adjustable 18-26"
Upright and all fittings	Stainless Steel
Base Size	Weighted 9" diameter metal base
Shipping weight	18 lbs.
Internal wiring	18 gauge Silver stranded with Teflon insulation. Rated (200° C)
Lamp socket	Glazed porcelain/nickel. Rated (200° C)



DL-FM

DUAL MOUNTED HEAT LAMPS

Switches	On/Off rated 15 amps @ 115 VAC
Power cord	120 VAC-18 gauge 3 conductor cable 84" long with Nema 5-15P plug (standard) 240 VAC-18 gauge 3 conductor harmonized cable 84" long with Schuko plug (standard).
Electrical	
Operating Voltage (Domestic)	120 volts 60 Hertz single phase
Operating Voltage (International)	240 volts 50 Hertz single phase
Power	500 watts Maximum, shatterproof design.
Operating amperage	5 amps (120 VAC) 2.5 amps (240 VAC)
Bulb type	Infrared 250 watts maximum, shatterproof design