





FLD-600-FM FRONT LINE DISPLAY FOR MOUNTING

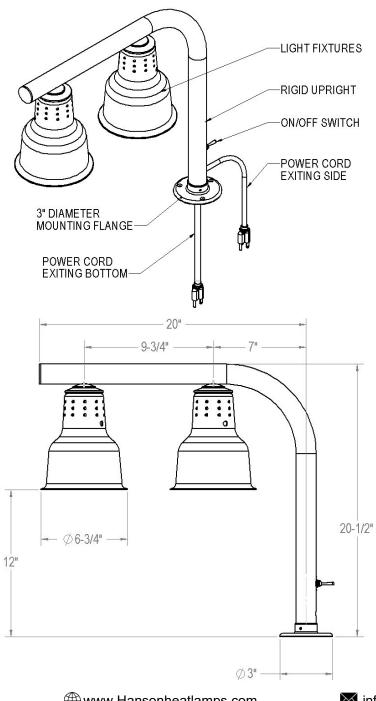



www.Hansonheatlamps.com

info@hansonHL.com





FLD-600-FM

FRONT LINE DISPLAY FOR MOUNTING

Description Dual heat lamp fixtures with 3" diameter flange designed to be mounted by customer on either a counter or cutting board. Available in 6 different finish options. Brass surfaces have a clear baked enamel finish. All internal components including lamp sockets and wiring are high temperature rated (392°F/200°C). Switch is rated for 15 amps @ 120 volts. Power cord can exit through the side of the upright or through bottom of upright depending on requirements.

Standard Models		
Model Number	Description	
FLD-600-FM	Front line display dual lamp warmer with 600 style shade for mounting	
Available Finishes: Black, Stainless Steel, Chrome, Smoked Copper, Brass, Bright Copper		
		-
***Note: Must Specify if power cord will exit through the bottom or out the back of the unit.		
Specifications		
Mechanical		
Light head material		Aluminum
Light head		(600 style) Diameter: 6 3/4" Height: 7 1/2"
Light head height from mounting		12" fixed
surface		
Shipping weight		Approximately 12 lbs.
Internal wiring		18 gauge Silver stranded with Teflon insulation.
		Rated (200° C)
Lamp socket		Glazed porcelain/nickel. Rated (200° C)
Switches		On/Off rated 15 amps @ 115 VAC
Power cord		120 VAC-18 gauge 3 conductor cable 84" long with
		Nema 5-15P plug (standard)
		240 VAC-18 gauge 3 conductor harmonized cable
		84" long with Schuko plug (standard).
Electrical		
Operating Voltage (Domestic)		120 volts 60 Hertz single phase
Operating Voltage (International)		240 volts 50 Hertz single phase
Power		500 watts Maximum.
Operating amperage		5 amps (120 VAC) 2.5 amps (240 VAC)
Bulb type		Infrared 250 watts maximum, shatterproof design