



# FLAV-R-SAVOR® HEATED AIR CURTAINS

Models FS2HAC-2PT, -4PT, FS2HAC-30

The *patented* Hatco Flav-R-Savor® Heated Air Curtain effectively and safely holds hot food hot without the use of doors, allowing immediate access to product.

Models FS2HAC-2PT, -4PT have warm air at the front and back of the cabinet which is forced downward, through the ducts above the opening, forming a "curtain" of heated air. A portion of the heated air is drawn toward the center and sides of the cabinet, warming each pan evenly.

Model FS2HAC-30 has warm air forced downward, through the ducts above the openings, forming a "curtain" of heated air. A portion of the heated air is drawn toward the back of the cabinet, warming each pan evenly.

## FLEXIBILITY

The patented Heated Air Curtain is ideal for holding wrapped product like tortillas, burritos, and ribs, as well as product on sheet pans like biscuits, chicken, hamburger patties, pizza, and baked potatoes. Holding temperatures range from 80°F to 200°F (27°- 93°C).

## QUALITY

The following features assure the finest performance for years to come:

- Patented air baffle and duct design creates consistent temperature and peak product holding on each pan
- Doorless design allows easy access to food product from both sides
- Holding temperatures range from approximately 80°F to 200°F (27°-93°C)
- Digital display set point controller for precise temperature setting
- FS2HAC-2PT, -4PT are four-tiered units which accommodates four (4) full size sheet pans or eight (8) half size sheet pans while two-tiered unit accommodates two (2) full size sheet pans or four (4) half size sheet pans
- Accessory rack accommodates twelve (12) third-size high-heat pans (2.5" (64 mm) depth) or 4 third-size high-heat pans (2.5" (64 mm) on top with 4 third-size high-heat pans (6" (152 mm) depth) on bottom (FS2HAC-30 only)



Model FS2HAC-2PT  
Pass-through with  
accessory food pans



Model FS2HAC-4PT Pass-through  
with accessory food pans

Curved side panels and 10°  
slanted control panel for easy  
viewing of temperature



Model FS2HAC-30 with removable  
crumb tray and accessory rack



(FS2HAC-2PT, 4-PT, FS2HAC-30)



(FS2HAC-2PT, 4-PT)



BLANKET ELEMENTS GUARANTEED AGAINST  
BURNOUT AND BREAKAGE FOR ONE YEAR.

**HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.**  
(800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976  
[www.hatcocorp.com](http://www.hatcocorp.com) • E-mail: [equipsales@hatcocorp.com](mailto:equipsales@hatcocorp.com)


Form No. FS2HAC Spec Sheet

Printed in U.S.A.  
January 2012



# FLAV-R-SAVOR® HEATED AIR CURTAINS

Models FS2HAC-2PT, -4PT, FS2HAC-30

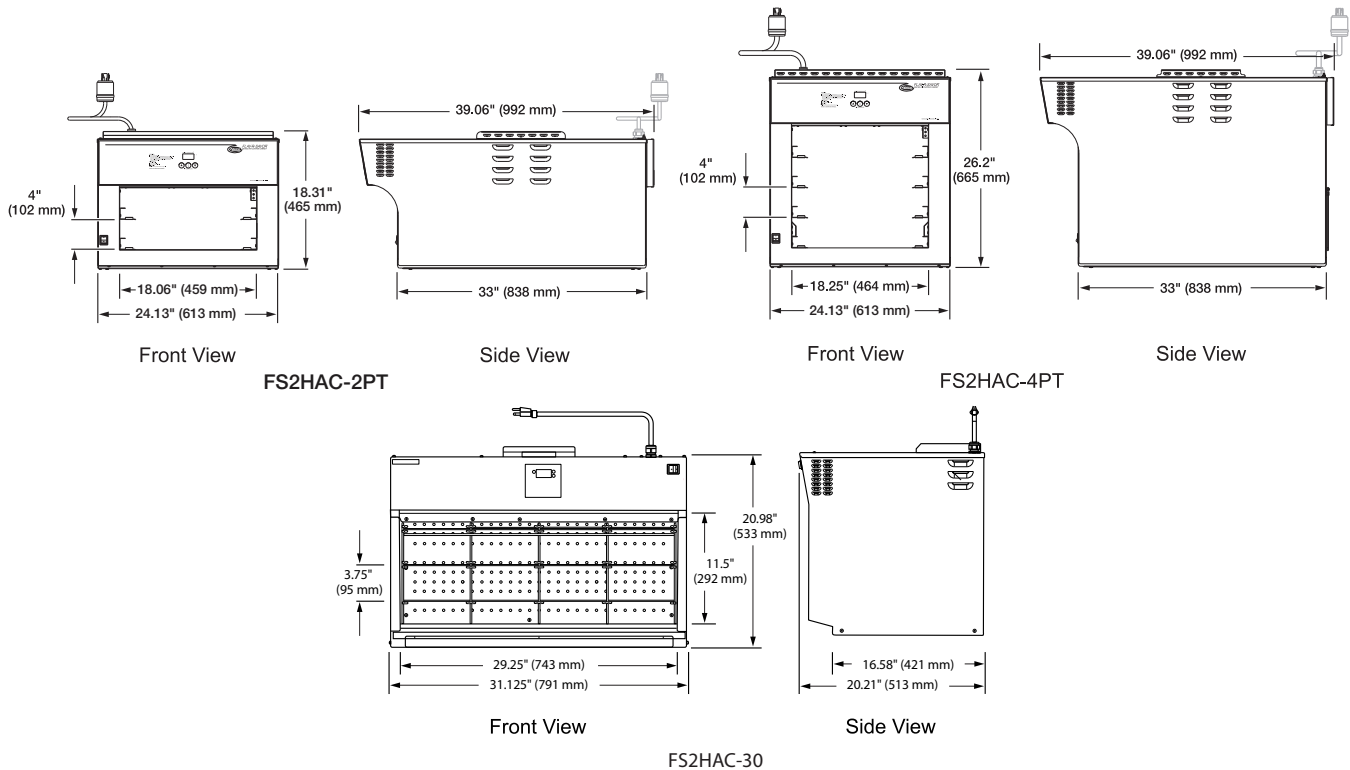

## SPECIFICATIONS

### Standard Models

Model†	Type	Shipping Weight
FS2HAC-2PT	2-Tier Pass-Through Warmer with Air Curtain	165 lbs. (75 kg)
FS2HAC-4PT	4-Tier Pass-Through Warmer with Air Curtain	191 lbs. (87 kg)
FS2HAC-30	Single Opening Specialty Warmer with Air Curtain	105 lbs. (48 kg.)

† NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included. \*Shipping weight is approximate.

### DIMENSIONS

FS2HAC-2PT: 24.13"W x 39.06"D x 18.31"H\* (613 x 992 x 465 mm).

FS2HAC-4PT: 24.13"W x 39.06"D x 26.2"H\* (613 x 992 x 665 mm).

FS2HAC-30: 31.125"W x 20.21"D x 20.98"H\* (791 x 513 x 533 mm).

\* Add 4" (102 mm) to height when using 4" (102 mm) legs.

### Display Racks

#### 3x4 Shelf Rack – FS2HAC-30

Twelve, Third-size High-Heat Pans (2.5" depth [64 mm]) or Four, Third-size High-Heat Pans (2.5" depth [64 mm]) on Top with Four, Third-size High-Heat Pans (6" depth [152 mm]) on bottom.

### OPTIONS (NOT FOR RETROFIT)

- Designer Colors (Housing and Crumb Tray): Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper (FS2HAC-30 only)
- 4" (102 mm) Adjustable Legs

### PRODUCT SPECS

#### Heated Air Curtain

The Heated Air Curtain shall be a Flav-R-Savor® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A. With 24/7 service (U.S. and Canada only), the Heated Air Curtain shall be rated at ... watts, ... volts, and be ... inches (millimeters) in overall width.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350  
 Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com

### VOLTAGE

FS2HAC-2PT: 120/208 volts, 60 Hz, 2589 watts, 10.8 amps (uses NEMA L14-20P).

FS2HAC-4PT: 120/208 volts, 60 Hz, 3378 watts, 14.1 amps (uses NEMA L14-20P).

Export models available.

FS2HAC-30: 120 volts, 60 Hz, 1744 watts, 14.5 amps (uses NEMA 5-15P, Canada uses NEMA 5-20P).


### CORD LOCATION

FS2HAC-2PT, 4PT: Top of unit towards the back, left side.


FS2HAC-30: Top of unit towards the back, right side.

### PLUG CONFIGURATIONS

FS2HAC-2PT, -4PT:



FS2HAC-30:



### ACCESSORIES

- 3' x 4' pan rack

It shall consist of a powdercoated steel housing, stainless steel front panel, and metal sheathed heating elements. Heated Air Curtain features easy-to-use digital controls, an on-off switch, and 6' (1829 mm) cord with plug.

Accessories shall include pan rack.