




# Flav-R-Savor® convected Air, curved front display case

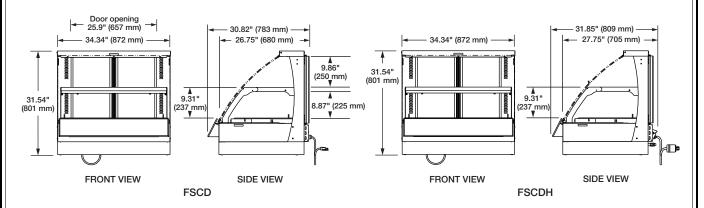

## **SPECIFICATIONS**

#### Non Humidified

Model	Watts	Voltage	Shipping Weight
FSCD-2PD	1800	120	184 lbs. (84 kg)

#### Humidified

Model	Watts	Voltage	Shipping Weight
FSCDH-2PD	2805	120/208	190 lbs. (86 kg)
FSCDH-2PD	2805	120/240	190 lbs. (86 kg)

## **DIMENSIONS**

FSCD-2PD:

34.34"W x 30.82"D x 31.55"H w/legs (872 x 783 x 801 mm). FSCDH-2PD:

34.34"W x 31.85"D x 31.55"H w/legs (872 x 809 x 801 mm). Usable Heated Shelf Space - Upper ......29.92"W x 15.5"D (765 x 393 mm) - Lower......32.12"W x 18"D (815 x 457 mm)

## **VOLTAGE**

FSCD-2PD:

120, single phase, 15 Amps, NEMA 5-20P FSCDH-2PD:


120/208-240V, single phase, 13.3 Amps, NEMA L14-20P

### **CORD LOCATION**

Control side at right base corner.

Water Capacity: 7 quarts (6.63 liters).

#### PLUG CONFIGURATIONS



#### **OPTIONS (NOT FOR RETROFIT)**

- ☐ Designer Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper
- ☐ Heated Stone Colors: Gray Granite, Bermuda Sand, Night Sky (standard), Sawgrass
- ☐ Valve relocation (Humidified model only)
- ☐ Glass center shelf (in lieu of perforated stainless steel shelf)

#### **ACCESSORIES**

□ 10"D x 1.25"H (254 D x 32 H mm) circular perforated riser in stainless steel

#### PRODUCT SPECS

### Convected, Curved Front Display Case

The Convected Air, Curved Front Display Case Flav-R-Savor® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Display Case shall be rated at ... watts, ... volts and be ... inches (millimeters) in overall width. Thermostatically-controlled heat and humidity (FSCD-2PD models only), digital with readout or display, full view tempered glass sides, front and doors, perforated 304 brushed

annealed stainless steel upper shelf, Swanstone base shelf, overhead lights, and cord and plug.

Accessories shall include circular perforated riser and stainless steel food

One year parts and labor warranty, with 24/7 parts and service assistance (U.S. and Canada only)

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350 Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com