



Project _____

Item # _____

Quantity _____

Powermite® Gas Booster Water Heaters

Model: PMG-100, -200

The Hatco Powermite® Gas Booster Water Heater provides 180°F (82°C) sanitizing hot water and long life dependability. Designed to fit under the dishtable, near the dishwasher, to minimize the heat loss that can occur when heaters are installed in a remote location. They can operate on either natural or propane gas and feature a burner system that utilizes both primary and secondary air for consistent ignition.

Standard features

- Stainless steel tanks
- Stainless steel front and top, with powdercoat sides and back (stainless steel body available)
- Finned tube copper heat exchanger
- Spark to light with standing pilot
- Three tube type burners in the PMG-100, six tube type burners in the PMG-200
- Temperature/pressure relief valve
- Pressure reducing valve
- Two temperature/pressure gauges
- Low-water cut-off
- Blended phosphate water treatment system
- Shock absorber



Options (available at time of purchase only)

- Stainless steel body and base
- Security package (Torx® screws and control cover)

Accessories

- Brass Pressure Reducing Valve
- Stainless steel floor mounting leg assembly
- 6"-7" (152-178 mm) Adjustable Stainless Steel Legs (4)
- Air Interlock Switch
- Back Pressure Relief Valve
- High Altitude Orifice Kit (PMG-200 only)

BOOSTER SIZING

Water Temperature Recovery Table in GPH (LPH) and °F (°C)

Model	Input MBH (1,000 BTU/HR)	Temperature Rise				
		30° (16°)	40° (22°)	50° (28°)	60° (33°)	70° (39°)
PMG-100	105	321 (1215)	241 (912)	193 (731)	161 (610)	138 (522)
PMG-200	195	602 (2279)	452 (1711)	361 (1367)	301 (1139)	258 (977)

Note: Installations above 2,000 ft. (610 m) will reduce the above capacities and may require orifice changes to meet IAS safety compliance. Consult "Installation and Operating Manual" for sizing adjustments and orifice changes.

WATER QUALITY REQUIREMENTS

Incoming water in excess of 3.0 grains of hardness per gallon (GPG) (.75 grains of hardness per liter) must be treated and softened before being supplied to booster heater(s). Water containing over 3.0 GPG (.75 GPL) will decrease the efficiency and reduce the operating life of the unit.

Note: Product failure caused by liming or sediment buildup is not covered under warranty.




HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350

Fax: (800) 543-7521 | Int'l. Fax: (414) 671-3976 | www.hatcocorp.com | equipmentsales@hatcocorp.com or intlsales@hatcocorp.com



Powermite® Gas Booster Water Heaters

Model: PMG-100, -200

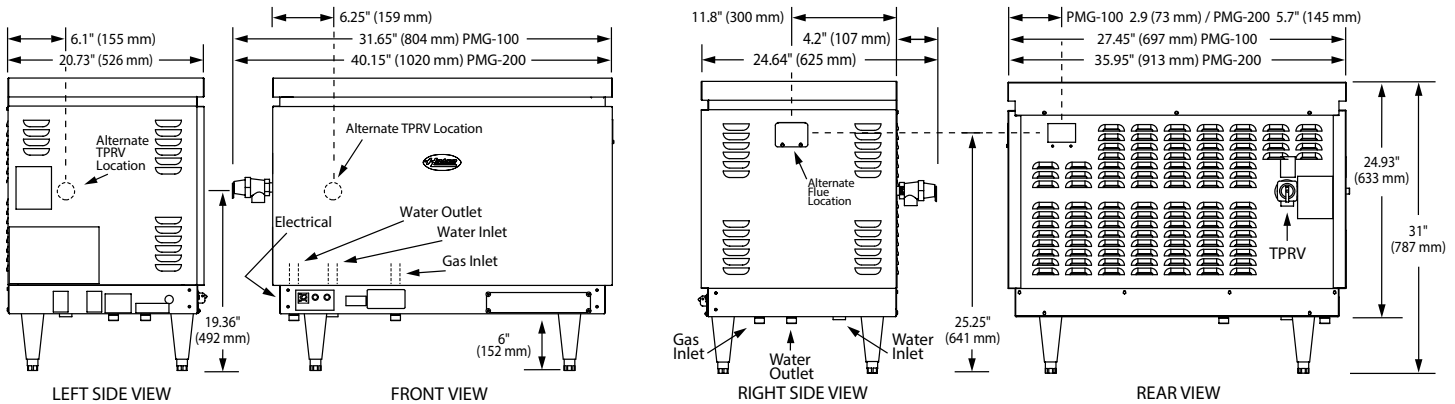

Models PMG-100 & PMG-200

SPECIFICATIONS Atmospheric Hot Water Dispenser

Model	Dimensions (Width x Depth x Height*)	Capacity	Fuel	Vent [^]	Ship Weight*
PMG-100	27.45" x 20.73" x 31" (720 x 625 x 787 mm)	Input 105,000 BTUs/Hour Output - 84,800 = 24.8kW	Natural at 3.5" (89 mm) high burn or Propane/LP at 10" (254 mm) high burn	Forced draft system with 4" (102 mm) diameter vent pipe adapter	180 lbs. (82 kg) dry
PMG-200	35.95" x 24.64" x 31" (913 x 625 x 787 mm)	Input 195,000 BTUs/Hour Output - 156,000 = 45.7kW			215 lbs. (98 kg) dry

* Shipping weight includes packaging.

* Height includes 6" (152 mm) legs.

If using supplied right angle duct adaptor, add 6" (152 mm) to width or depth of unit.

[^] Before installing any method of venting you should contact the local code authority or your gas supplier to make sure that the final installation will be acceptable to the authorities who have jurisdiction. The proper method of venting a power vented gas appliance is too complicated to cover in this specification sheet and is explained in detail in the National Fuel Gas Code. Before installing the venting system, the person or agency making the installation must be familiar and experienced with the guidelines of the National Fuel Gas Code.

ALL INSTALLATIONS MUST BE MADE BY A QUALIFIED INSTALLER IN ACCORDANCE WITH THE NATIONAL FUEL GAS CODE OR LOCAL CODES.

Electrical

120 VAC, 360 watt, 3.00 amps

Connections

Gas - 3/4" NPT, Water - 3/4" NPT
Electric - 120 VAC, 15 amp

Fluing

Direct - combustion air enters bottom, flue gasses exit right side or back at top of unit. 4" (102mm) flue round

Operating Water Pressure

150 PSI (1034 kPa) max. Relief valve set at 150 PSI (1034 kPa), 210° F (99° C)

Operating Pressure Specifications at Manifold

Gas Type	Water Column at Pressure Tap	
	High Burn	
Natural	3.5" (89 mm)	
Propane/LP	10" (254 mm)	

Gas Inlet Pressure

Gas Type	Water Column	
	Minimum	Maximum
Natural	5" (127 mm)	10.5" (267 mm)
Propane/LP	11" (254 mm)	13" (330 mm)

PRODUCT SPECS Gas Booster Water Heater

The Gas Booster Water Heater to supply the final 180°F (82°C) rinse for the dishwasher shall be a Hatco Powermite® Model ... as manufactured for commercial use by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The booster shall have the capacity to heat ... gph (lph) from 110°F to 180°F (43°C to 82°C) and it shall berated at ... btu, 120 volts, single phase. The stainless steel tank shall be designed for a working pressure of 150 psi (1034 kPa) and hydrostatically tested at 300 psi (2069 kPa).

The heater shall be complete with all internal plumbing, including 3/4" NPT pipe and fittings from inlet and outlet. All controls shall be built-in, and carry safety approval in accordance with ANSI 21.10.3. Sanitary approval shall be in accordance with NSF Standard 5. Proper surface mounting circuit breaker or fused disconnect switch shall be provided by electrical contractor.

The gas fired heating system shall be controlled by close tolerance immersion thermostats. The booster shall be protected with high temperature limit switch (ECO) and low water cut-off.

The heater shall consist of stainless steel front, top and stainless steel adjustable legs or stainless steel front and silver-gray hammertone sides and back with standard 6" (152 mm) legs.

The heater shall include a temperature/pressure relief valve, high-temperature limit, pressure reducing valve with bypass, indicating temperature/pressure gauge, shock absorber, and blended phosphate water treatment system.

Warranty consists of 24/7 parts and service assistance (US and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350

Fax: (800) 543-7521 | Int'l. Fax: (414) 671-3976 | www.hatcocorp.com | equipmentsales@hatcocorp.com or intl@hatcocorp.com

Water Heater Data

PLUMBING DATA

Dielectric couplings should be used in connecting dissimilar metals, such as galvanized to copper, to prevent electrolysis.

All Hatco Booster Water Heaters require 3/4" piping.

A check valve should not be installed in the supply line to the booster heater.

All shut-off valves must be gate or ball valves – not globe valves.

ELECTRICAL DATA

$$\left(\frac{\text{GPH} \times \text{°F Temp. Rise}}{400} = \text{kW} \right)$$

NOTE: GPH is gallons per hour.

ELECTRICAL FORMULAS

$$\begin{aligned} \text{Watts} &= \text{Amps} \\ \text{Volts} & \quad 1\text{-phase} \end{aligned}$$

$$\begin{aligned} \text{Watts} \times .86 &= \text{Amps} \\ \text{Volts} & \quad 3\text{-phase} \\ & \quad (\text{open delta}) \end{aligned}$$

$$\begin{aligned} \text{Watts} &= \text{Amps} \\ \text{Volts} \times 1.73 & \quad 3\text{-phase} \\ & \quad (\text{balanced delta}) \end{aligned}$$

SEE BOOSTER HEATER SIZING CHART, PAGES 158-160.

NOTE: When primary temperatures are less than 100°F consult factory for suitable booster heater.

WATER TEMPERATURE RECOVERY TABLE IN GPH °F RISE

kW	30°	40°	50°	60°	70°	80°	90°	100°
4	54	40	32	27	23	20	18	16
5	67	50	40	33	29	25	22	20
6	80	60	48	40	34	30	27	24
7	94	70	56	47	40	35	31	28
9	120	90	72	60	52	45	40	36
9.9	132	99	79	66	57	50	44	40
10.5	140	105	84	70	60	53	47	42
11.4	153	114	92	76	65	57	51	46
12	161	120	96	80	69	60	54	48
13.5	181	135	108	90	77	68	60	54
15	201	151	120	100	86	75	67	60
17.25	231	173	139	115	99	87	77	69
18	241	181	145	120	103	90	80	72
24	321	241	193	161	138	120	107	96
27	361	271	217	181	155	135	120	108
30	401	301	241	201	172	151	134	120
36	482	361	289	241	206	181	161	145
39	522	391	313	261	224	196	174	157
40.5	542	407	325	271	232	203	181	163
45	602	452	361	301	258	226	201	181
54	723	542	434	361	310	271	241	217
57	763	573	458	381	326	286	254	229

Sizing Chart For Low-Temp Dishmachines

BOOSTERS RATED AT 30°F RISE

Dishwasher Model Number	Electric Compact Booster	Electric Imperial Booster	Dishwasher Model Number	Electric Compact Booster	Electric Imperial Booster
AMERICAN DISH SERVICE			CHAMPION		
AH, AH-3D, AH-3D-S, AHC, AHC-3D, AHC-3D-S, ET-A, ET-AF, ET-AH, ET-A-M, ET-AH-M, ET-A-3, ET-AH-3, L-90-3D, L-90-3D-K, L-90-3D-K-S, L-90-3D-S, L-90-3DC, L-90-3DC-K, L-90-3DC-K-S, L-90-3DC-S, L-90-3DW, L-90-3DW-K, L-90-3DW-K-S, L-90-3DW-S, L-90-3DWC, L-90-3DWC-K, L-90-3DWC-K-S, L-90-3DWC-S, WH, WHC	C-4	S-6	ULD, ULF	C-6	S-6
A-3D, A-3D-S, A, AC, AC-3D, AC-3D-S, AH-B, ET-AF-3, ET-AF-M, HT-25, L-60-3D, L-60-3D-K, L-60-3D-K-S, L-60-3D-S, L-60-3DC, L-60-3DC-K, L-60-3DC-K-S, L-60-3DC-S, L-60-3DW, L-60-3DW-K, L-60-3DW-K-S, L-60-3DW-S, L-60-3DWC, L-60-3DWC-K, L-60-3DWC-K-S, L-60-3DWC-S, L-72-3D, L-72-3D-K, L-72-3D-K-S, L-72-3D-S, L-72-3DC, L-72-3DC-K, L-72-3DC-K-S, L-72-3DC-S, L-72-3DW, L-72-3DW-K, L-72-3DW-K-S, L-72-3DW-S, L-72-3DWC, L-72-3DWC-K, L-72-3DWC-K-S, L-72-3DWC-S, W, WC	C-5	S-6	DLF	C-13	S-13
A-B, AD-25, SS-25, 5-AH, 5-AHS	C-6	S-6	KL44, KL66	C-36	S-36
AF, AF-3D, AF-3D-S, AF-B, AFC, AFC-3D, AFC-3D-S, AFW, AFWC, 5, 5-S	C-7	S-7	GMA DISHMACHINES		
ADC-44, ADC-66, 5-AG, 5-AGS, 5-CD-LF, 5-CD-RF	C-9	S-9	A-1, AH-1, C-1, VAC-1, A-3, AH-3, C-3, L-1C, VAC-3, VAC-4, VAC-5, L-1X	C-4	S-6
BLAKESLEE			A-2, AH-1, AH-2, AH-3, B-3, C-1, C-2, C-3, EVA-1, EVA-2, EVA-3, EVA-4, EVA-5, VAC-2	C-6	S-6
U21-C	C-4	S-6	B-1	C-7	S-7
D-8-LT	C-6	S-6	B-2	C-9	S-9
DD-8-LT, R-CC64-LT, R-EE-LT	C-12	S-12	CMA-44L with tank heater, CMA-66L	C-24	S-24
Series XF-EE-LT, XF-PEE-LT, XF-LL-LT, XF-PLL-LT, XF-MM-LT, XF-PMM-LT, XF-EEE-LT, XF-LLL-LT, XF-MMM-LT	C-13	S-13	CVA-1, CVA-2, CVA-3, CVA-4	C-6	S-6
Series R-L-LT, R-PL-LT, R-M-LT, R-PM-LT, F-L-LT, F-PL-LT, F-M-LT, F-PM-LT (single tank)	C-36	S-36	CVA-5	C-7	S-7
Series "R" & "F" -CC-LT, -EE-LT, -LL-LT, -MM-LT, -LLL-LT, -MMM-LT, -PCC-LT, -PEE-LT, -PLL-LT, -PMM-LT (multi-tank)	C-24	S-24	HOBART		
Series XF-L-LT, XF-PL-LT, XF-M-LT, XF-PM-LT (single tank)	C-54	S-54	LX-18C, LX-30C, LX-40C, WM-5C, SR24C	C-4	S-6
Series XF-PEE-LT, XF-PLL-LT, XF-PMM-LT, XF-EEE-LT, XF-LLL-LT, XF-MMM-LT (multi-tank)	C-36	S-36	LT-1	C-6	S-6
FA (Flight-A-Round) and RA (Rack-A-Round) use comparable "F" listing.			AM-14, AM-14C	C-7	S-7
			C44A, CRS66A, CPW80A	C-27	S-27
			FT-800	C-30	S-30
			JACKSON		
			Conservor 24LT, 200LT, ES1000 (Ecolab/Jackson)	C-4	S-6
			Conservor 1, Conservor XL, ES2000 (Ecolab/Jackson)	C-9	S-9
			Conservor 2, Conservor XL2, ES4000 (Ecolab/Jackson)	C-15	S-15
			AJ-44, AJ-66, AJ-80	C-18	S-18
			KNIGHT EQUIPMENT LTD.		
			KLE-112-HL	C-5	S-6
			KLE-117i, KLE-117c, KLE-175GT, KLE-175GTM	C-9	S-9
			KLE-235d	C-13	S-13
			KLE-175GT Corner, KLE-175GTM Corner	C-12	S-12

Low-Temp Sizing Data

Chemical low-temp dishwashers are most effective when supplied with a 140°F hot water supply. Sometimes this water temperature is not available due to undersized primary water heaters or local safety codes. Hatco can provide a pre-heater for chemical low-temp dishwashers to provide an adequate supply of 140°F hot water for proper operation.

NOTE: When ordering a heater for use with a chemical low-temp dishwasher, thermostat adjustments for low-temp applications are the responsibility of the installer.

To properly size a Hatco heater for low-temp use:

- Determine the required temperature rise by subtracting the available hot water supply temperature from 140°F. This should be a minimum of 20°F.
- Determine the water usage by consulting the dishwasher data plate, literature, or NSF listing. This should be shown as gallons per hour (GPH).
- Use the Hatco formula for sizing or the sizing chart on this page to determine the required kW and select the appropriate Hatco model.



Booster Heater Sizing Chart

Dishwasher Model Number	Electric Compact Booster Temperature Rise		Electric Imperial Booster Temperature Rise		Gas Powermite® Booster [▲] Temperature Rise	
	40°F	70°F	40°F	70°F	40°F	70°F
ADAMATION						
CSL-1390, CA-2, CA-3, CA-4, SLAP 44 CA, CA-1	C-39 C-54	(2)C-36 (2)C-45	S-39 S-54	(2)S-36 (2)S-45	PMG-200 PMG-200	(2)PMG-200 (2)PMG-200
ALVEY						
FLC-10, SL-2S			S-6	S-9		
FLC-12, CL-1, CL-1 Turntable, SA-5A			S-7	S-12		
FL-2S			S-9	S-13		
KS-70, KS70M SB			S-9	S-15		
SL-2D			S-13	S-18		
FLC-36			S-15	S-27		
KS-88-C			S-18	S-30		
KS-70-N, KS-88-N			S-39	(2)S-40		
AMERICAN DISH SERVICE						
AF-ES, AFC-ES	C-4	C-7	S-4	S-7		
HT-25	C-7	C-12	S-7	S-12		
ADC-44, ADC-66	C-12	C-24	S-12	S-24		PMG-100
BLAKESLEE						
UC-21A, UC-21B	C-4	C-4	S-6	S-6	PMG-60	PMG-60
UC-21	C-6	C-12	S-6	S-12	PMG-60	PMG-60
D-8	C-9	C-13	S-9	S-13	PMG-60	PMG-60
D-9	C-12	C-17	S-12	S-17	PMG-60	PMG-100
Series "R" & "F" -CC, -EE, -LL, -MM, -LLL, -MMM, -PCC, -PEE, -PLL, -PMM (multi-tank) with suffix "LC"	C-13	C-24	S-13	S-24	PMG-200	PMG-200/100
Series XF-EE, XF-LL	C-17	C-30	S-17	S-30	PMG-100	PMG-200
Series XF-LL, XF-PLL, XF-MM, XF-PMM, XF-EEE, XF-LLL, XF-MMM (Multi-tank) with suffix "LC"	C-17	C-30	S-17	S-30	PMG-200	PMG-200/100
DD-8	C-18	C-30	S-18	S-30	PMG-100	PMG-200
Series F-E, FA-EE, FA-PEE, FA-LL, FA-PLL, FA-MM, FA-PMM, F-EEE, FA-EEE, FA-LLL, FA-MMM, F-PE	C-30	C-54	S-30	S-54	PMG-200	PMG-200/100
Series R-L, R-PL, R-M, R-PM, F-L, F-PL, F-M, F-PM (single tank)	C-36	C-54	S-36	S-54	PMG-200	(2)PMG-200
Series XF-L, XF-PL, XF-M, XF-PM (single tank)	(2)C-36		(2)S-36			
Series R-E, R-PE, XF-PEE, XF-PLL, XF-PMM, XF-EEE, XF-LLL, XF-MMM (multi-tank) FA (Flight-A-Round) and RA (Rack-A-Round) use comparable "F" listing.	C-45	(2)C-30	S-45	(2)S-30	PMG-200	(2)PMG-200
XF-EE, XF-EE-LT (with LT suffix)	C-17	C-36	S-17	S-36	PMG-100	PMG-200
CHAMPION						
U-H1, UH-200, UH-200B, U-HB	C-4	C-6	S-6	S-6	PMG-60	PMG-60
UL-100, UH-100B, UH-170B, UH-200B, DH-2000	C-6	C-9	S-6	S-9	PMG-60	PMG-60
UL-150	C-4	C-7	S-6	S-7	PMG-60	PMG-60
UH-150, UH-150B, UH-100, UH-100B, DHB-VS	C-5	C-9	S-6	S-9	PMG-60	PMG-60
D-H1, D-HB, D-H1T, D-HBT	C-9	C-13	S-9	S-13	PMG-60	PMG-60
44 DRWS, 66 DRPWWS, 80 DRHDPWWS, 70 DRFFPWWS	C-9	C-13	S-9	S-13	PMG-60	PMG-100
PP-28	C-27	C-45	S-27	S-45	PMG-100	PMG-200
D-H1C, D-H1TC	C-9	C-18	S-9	S-18	PMG-60	PMG-100
DL-1000, DH-1000, DHB-VS	C-6	C-12	S-6	S-12	PMG-60	PMG-60
44DR, 66DRPW, 80DRHDFW, 70DRFFPW, 54DR, 76DRPW, 80DRFFPW, 90DRHDPW	C-12	C-24	S-12	S-24	PMG-60	PMG-100
44-WS, 66 WSPW, 66-WS, 64, 70WSFFPW, 80WSHDPW, 90FFPW, 100HDPW, 86 PW, 84, 106 PW, 120 HDPW, 110 FFPW	C-15	C-24	S-15	S-24	PMG-60	PMG-100
UC-CW6-WS	C-24	C-36	S-24	S-36	PMG-100	PMG-200
US-CW8-WS	C-24	C-39	S-24	S-39	PMG-100	PMG-200
44, 66 PW, 70FFPW, 80HDPW	C-27	C-54	S-27	S-54	PMG-100	PMG-200
54, 76PW, 80FFPW, 90HDPW,	C-24	C-45	S-24	S-45	PMG-100	PMG-200
40-KB, 40-KB-2-2, 40-KFWB, 40-KPRB, 40-KPRB-2-2, 40KPRB-2-3, 44LT, 60-KB, 60-KB-2-2, 60-KFWB, 60-KFWB-2-2, 60-KPRB, 60-KPRB-2-3, 64KB, 64-KB Corner, 64-KPRB, 64-KPRB Corner, 64 Modular, 66LT, 86 Modular	C-30	C-54	S-30	S-54	PMG-200	PMG-200/100
44-KB, 44-KB Corner, 44-KPRB, 44-KPRB Corner, 54-KB, 54-KB Corner, 54-KPRB, 54-KPRB Corner, 44 Modular, 66 PW Modular, UC** Series 6' Center, UC-C4	C-36	C-57	S-36	S-57	PMG-200	PMG-200/100
UC-CW4	C-36	(2)C-36	S-36	(2)S-36	PMG-200	PMG-200/100
UC-C	C-45	(2)C-36	S-45	(2)S-36	PMG-200	PMG-200/100
UC**CW Series 6' Center	C-45	(2)C-39	S-45	(2)S-39	PMG-200	(2)PMG-200
W-6-WS, W6	C-45	(2)C-45	S-45	(2)S-40	PMG-200	(2)PMG-200

[▲] Powermite installations above 2,000 ft. will reduce the above capacities and may require change of pressure and/or orifices in certain models at time of install to meet IAS safety compliance. These modifications are the responsibility of the installer. Consult "Installation and Operating Manual" for sizing adjustments and orifice changes.



Booster Heater Sizing Chart

Dishwasher Model Number	Electric Compact Booster Temperature Rise		Electric Imperial Booster Temperature Rise		Gas Powermite® Booster [▲] Temperature Rise	
	40°F	70°F	40°F	70°F	40°F	70°F
CMA DISHMACHINES						
CMA-180	C-7	C-12	S-7	S-12		
CMA-44/66	C-24	C-36	S-24	S-36	PMG-100	PMG-200
CMA-44H with tank heater, CMA-66H	C-36	C-45	S-36	S-45	PMG-100	PMG-200
EST-44/66	C-12	C-24	S-12	S-24	PMG-60	PMG-100
HOBART						
AM-15F	C-4	C-6	S-6	S-9	PMG-60	PMG-60
LXiC, LXiGC, LX-18C, LX-30C, LX-40C, AM-15F	C-4	C-7	S-6	S-6	PMG-60	PMG-60
LX-30, SR24, SR24H	C-4	C-7	S-6	S-7	PMG-60	PMG-60
LX-18, AM-14F, AM-15, AM-15T	C-5	C-9	S-6	S-9	PMG-60	PMG-60
WM-5C	C-6	C-9	S-6	S-9		PMG-100
WM-5 (Without sump heater)	C-7	C-12	S-7	S-12		
AM-14T, AM-14TC	C-7	C-12	S-7	S-12	PMG-60	PMG-60
AM-14, AM-14C	C-9	C-12	S-9	S-12	PMG-60	
AM-12, AM-12C*	C-9	C-12	S-9	S-12	PMG-60	PMG-100
UW-50			S-15	S-24		
OR Opti-RinSe C44A, CRS-66A, CCS-66A, CPW-80A, C54A, CRS-76A, CCS-76A, CPW-90A, C64A, CRS-86A, CCS-86A, CPW-100A, C88A, CRS-110A, CCS-11-0A, CPW-124A	C-15	C-27	S-15	S-27	PMG-100	PMG-200
C-54A, CRS-76A, CPW-90A, CCS-76A	C-39	(2)C-36	S-39	(2)S-36	PMG-200	PMG-200/100
C-44A, CRS-66A, CCS-66A, CPW-80A, C-64A, CRS-86A, CCS-86A, CPW-100A	C-30	C-54	S-30	S-54	PMG-200	PMG-200/100
C-88A, CRS-110A, CPW-124A, CCS-110A	C-36	C-54	S-36	S-54	PMG-200	PMG-200/100
Opti-RinSe C44AW, CRS-66AW, CCS-66AW, CPW-80AW	C-9	C-15	S-9	S-15	PMG-60	PMG-100
OR C-44AW, CRS-66AW, CPW-80AW, CCS-66AW	C-12	C-24	S-12	S-24	PMG-100	PMG-100
C-44, CRS-66, CPW-80	C-36	C-54	S-36	S-54	PMG-200	PMG-200/100
CL44e, CL66e	C-13	C-24	S-13	S-24	PMG-100	PMG-200
CLPS66e	C-15	C-30	S-15	S-30	PMG-100	PMG-200
C-54, CRS-76, CPW-90	C-54	(2)C-39	S-54	(2)S-39	PMG-200/100	(2)PMG-200
C-64W, CRS-86W, CPW-100W, C-88W, CRS-110W, CPW-124W, CCS-86W	C-24	C-36	S-24	S-36	PMG-100	PMG-200
C-64, CRS-86, CPW-100	C-45	(2)C-36	S-45	(2)S-36	PMG-200	PMG-200/100
FT800W, FT-900W	C-24	C-39	S-24	S-39	PMG-200	PMG-200
FT-600, FT-700	C-54	(2)C-39	S-54	(2)S-39	PMG-200/100	(2)PMG-200
FT800	C-39	(2)C-39	S-39	(2)S-39	PMG-200	(2)PMG-200
FT900	C-36	C-57	S-36	S-57	PMG-200	PMG-200/100
FT800S, FT-900S	C-39	(2)C-36	S-39	(2)S-36	PMG-200	PMG-200/100
UTW-28, UTW-28C			S-18	S-36		
FRC and FR (Fast Rack Series) use comparable "C" line listing.						
INSINGER						
GS 302, GS-14	C-4	C-4	S-6	S-6	PMG-60	PMG-60
45SA-5	C-4	C-7	S-6	S-7	PMG-60	PMG-60
Commander 18-5 Series, CS-5, CS-5C, CS-5CH, CS-5H, Ensign 40-2	C-6	C-12	S-6	S-12	PMG-60	PMG-100
Commander 18-6 Series, 18-6H	C-6	C-12	S-6	S-12	PMG-60	PMG-100
Commander 18-6, 18-6H (Built-In)	ABB-13.5	ABB-13.5				
Admiral 44-4, 66-4, Speeder 64, 86-3, Clipper (all)	C-15	C-27	S-15	S-27	PMG-100	PMG-200
Admiral 44-4, 66-4 (Built-In)	ABB-15-8	ABB-27-8				
135-20, 185-20, 250-20, 60-20, 85-20, R-106-2	C-24	C-45	S-24	S-45	PMG-100	PMG-200
Century (all)	C-24	C-45	S-24	S-45	PMG-100	PMG-200
Trac 878	C-24	C-36	S-24	S-36	PMG-100	PMG-200
Century 14, Clipper RC-##-RPW-W	C-24	C-39	S-24	S-39	PMG-100	PMG-200
Super 106-2, Trac 321, Trac 321-2/RPW	C-27	C-45	S-27	S-45	PMG-100	PMG-200
Defender Flight Machine	C-36	C-54	S-36	S-54	PMG-200	(2)PMG-200
Master RC 3-tank Flight Machine	C-15	C-27	S-15	S-27	PMG-200	(2)PMG-200
Master RC 4-tank Flight Machine	C-36	C-57	S-36	S-57		
CA-3 [Ⓢ]			S-9	S-24	PMG-200	
DA-3 [Ⓢ]			(2)S-9	(2)S-24		
For outdated models, consult factory for correct booster.						

* Model AM-12 with serial no. 12-067-357 or below and model AM-12C with serial no. 12-067-537 or below require slightly larger booster than listed.

OR C Models with serial no. 85-1041605 or greater use Opti-RinSe.

■ Shaded area indicates older models prior to Opti-RinSe.

▲ Powermite installations above 2,000 ft. will reduce the above capacities and may require change of pressure and/or orifices in certain models at time of install to meet IAS safety compliance. These modifications are the responsibility of the installer. Consult "Installation and Operating Manual" for sizing adjustments and orifice changes.

Ⓢ Consult factory - special plumbing may apply.



Booster Heater Sizing Chart

Dishwasher Model Number	Electric Compact Booster Temperature Rise		Electric Imperial Booster Temperature Rise		Gas Powermite® Booster [▲] Temperature Rise	
	40°F	70°F	40°F	70°F	40°F	70°F
JACKSON						
JP-24, JP-24B, JP-24F, JP-24BF	C-4	C-6	S-6	S-6	PMG-60	PMG-60
24B Series		C-4		S-6		PMG-60
10AB, 10APRB		C-5		S-6		PMG-60
44CE [*] , 66 CERPW	C-30	C-54	S-30	S-54	PMG-200	
54CE, 76 CERPW	C-36	(2)C-30	S-36	(2)S-30	PMG-200	
64CE, 86 CERPW	C-27	C-39	S-27	S-39	PMG-200	
100	C-12	C-24	S-12	S-24	PMG-100	
100B, 100PRB, 150B, 150PRB		C-9		S-9		
150	C-12	C-18	S-12	S-18		PMG-100
200	C-7	C-12	S-7	S-12	PMG-60	PMG-60
200B		C-6		S-6		PMG-60
Tempstar GPX						PMG-60
Tempstar, Tempstar SDS, Tempstar HH	C-6	C-12	S-6	S-12	PMG-100	PMG-100
TS-44, TS-66	C-24	C-36	S-24	S-36	PMG-100	PMG-200
AJ-44, AJ-66, AJ-80, WH-44, ES-4400, ES-6600 (ECOLAB/JACKSON)	C-24	C-45	S-24	S-45	PMG-100	PMG-200
AJ-54, AJ-76, AJ-90	C-30	C-54	S-30	S-54	PMG-200	PMG-200/100
AJ-64, AJ-86, AJ-100	C-24	C-39	S-24	S-39	PMG-100	PMG-200
[*] Model #44CE w/SN1999 or below requires larger booster than listed.						
KNIGHT EQUIPMENT LTD.						
KLE-112-HL	C-7	C-12	S-7	S-12	PMG-60	PMG-60
MEIKO						
K-44, K-66, K-80	C-24	C-36	S-24	S-36	PMG-100	PMG-200
K-54, K-76, K-90, K-64, K-86, K-100	C-24	C-45	S-24	S-45	PMG-100	PMG-200
METALWASH/INTEDGE						
FW4	C-12	C-18	S-12	S-18	PMG-60	PMG-100
RS-30A, RS-28L			S-15	S-24		
RT-74, RT-60, RT-42B, RT-42BC			S-27	S-40		
RS-2R			S-30	S-45		
STERO						
ER-44, ER-44-10, ER-66S, ER-76S, ER-76SC	C-15	C-24	S-15	S-24	PMG-60	PMG-100
ER-64, ER-86S, ER-94S, ER-94SC	C-15	C-24	S-15	S-24	PMG-60	PMG-100
SCT-44-10-LW, SCT-44-LW, SCT-66S-LW, SCT-76S-LW, SCT-76SC-LW, SCT-90S-LW	C-15	C-24	S-15	S-24	PMG-60	PMG-100
SC-1-2-4-LW, SC-1-6-4-LW, SC-2-4-LW, SC-5-2-4-LW, SC-5-6-4-LW, SC-6-4-LW	C-15	C-24	S-15	S-24	PMG-100	PMG-200
SCT-64, SCT-86S, SCT-94S, SCT-94SC	C-24	C-45	S-24	S-45	PMG-100	PMG-200
SCT-108S, SCT-108SC, SCT-76, SCT-94SM	C-30	C-54	S-30	S-54	PMG-200	PMG-200/100
SC-6-4, SCT-44, SCT-44-10, SCT-66S, SCT-76S, SCT-76SC, SCT-90S	C-36	C-54	S-36	S-54	PMG-200	PMG-200/100
SCT-120S, SCT-120SC, SCT-120SM, SCT-150SM	C-36	C-57	S-36	S-57	PMG-200	PMG-200/100
STW-110, SC-1-2-7-4, SC-1-6-3-4, SC-1-6-7-4, SC-2-7-4, SC-5-2-7-4, SC-5-6-3-4, SC-5-6-7-4, SC-6-3-4, SC-6-7-4	C-30	C-54	S-30	S-54	PMG-200	PMG-200/100
SC-1-2-4, SC-1-6-4, SC-2-4, SC-5-2-4, SC-5-6-4	C-36	(2)C-57	S-36	(2)S-57	PMG-200	(2)PMG-200
SCT-44-10-SC-1-3-4, SCT-44-10-3-4, SCT-44-SC-1-3-4, SCT-44-SC-3-4, SCT-54-SC-1-3-4, SCT-54-SC-3-4, SCT-76S-SC-3-4	C-36	C-54	S-36	S-54	PMG-200	(2)PMG-200
STPC (Four tank)	C-24	C-45	S-24	S-45	PMG-100	PMG-200
STPCW (Four tank)	C-27	C-45	S-27	S-45	PMG-100	PMG-200
STPC	C-30	C-54	S-27	S-54	PMG-200	PMG-200/100
STPCW	C-36	(2)C-30	S-36	(2)S-30	PMG-200	PMG-200/100
SD-2RA, SDRA, SDRA-PACK	C-12	C-18	S-12	S-18	PMG-60	PMG-100
U-31-A, U-31-AC			S-24	S-45	PMG-100	PMG-200
U-31-A2			(2)S-24	(2)S-45	PMG-200	(2)PMG-200
STBUW-1	C-45	(2)C-36	S-45	(2)S-36		
SC-2-3-4, SC-5-2-3-4	C-30	C-45	S-30	S-45	PMG-200	
SC20-1 (low temp.)	C-12		S-12		PMG-60	
SC20-2 (low temp.)	C-12	C-24	S-12	S-24		PMG-100
SC-2-8, SC-2-9, SC-1-2-8, SC-5-6-8, SC-6-8, SC-6-9, SC-1-6-8, SC-5-6-9, SC-5-2-9, SC-1-6-9, SC-5-2-8 (low temp.)	C-18	C-36	S-18	S-36	PMG-100	PMG-200

▲ Powermite installations above 2,000 ft. will reduce the above capacities and may require change of pressure and/or orifices in certain models at time of install to meet IAS safety compliance. These modifications are the responsibility of the installer. Consult "Installation and Operating Manual" for sizing adjustments and orifice changes.

This selector chart is based on 40°F and 70°F temperature rises, 20 psi flow pressure, and minimum rinse cycle timer setting in NSF listing.

All booster heaters are rated at 100% of the capacity of the dishwashers as recommended by the National Sanitation Foundation. Where make-up water for wash tank is provided from final rinse supply, chart recommendations are based upon this additional demand (not over 2 GPM) as required by NSF.

All sizings shown are that of the dishwasher manufacturers. Hatco Corporation is not responsible for incorrect sizing applications.

ELECTRICAL DATA

$$\left(\frac{\text{GPH} \times \text{°F Temp. Rise}}{400} = \text{kW} \right)$$

NOTE: GPH is gallons per hour.

Electrical Ratings For Hatco Water Heaters

Watts	Volts	Phase	Amps	Breaker or Fuse size
4kW	208	1	19	30
	240	1	17	30
	480	1	8	15
5kW	208	1	24	30
	240	1	21	30
	480	1	10	15
6kW	208	1	29	40
	208	3	25 [†]	40
	240	1	25	40
	240	3	22 [†]	30
	480	3	11 [†]	15
7kW	600	3	5.7	15
	208	1	34	50
	208	3	29 [†]	40
	240	1	29	40
	240	3	25 [†]	40
9kW	480	3	13 [†]	20
	600	3	6.7	15
	208	1	43	60
	208	3	38 [†]	50
	240	1	38	50
9.9kW	240	3	33 [†]	50
	480	3	16.3 [†]	30
	600	3	8.7	15
	208	1	47.5	60
10.4kW	208	3 (BAL.)	27.5	40
	208	3 (BAL.)	28.8	40
11.4kW	240	1	47.5	60
	240	3 (BAL.)	27.5	40
	480	3 (BAL.)	13.7	20
12kW	208	1	58	90
	208	3	33	50
	240	1	50	70
	240	3	29	40
	480	3	14.5	20
	600	3	11.6	20
13.5kW	208	1	65	90
	208	3	38	50
	240	1	56.3	90
	240	3	33	50
	480	3	16.3	30
15kW	600	3	13	20
	208	1	72	90
	208	3	41.7	60
	240	1	62.5	90
17.25kW	240	3	36.1	50
	480	3	18.1	30
	600	3	14.5	20
	208	3	47.9	60
	18kW	208	1	86.5
240		1	75	100
240		3	43.4	60
480		3	21.7	30
600		3	17	30

† Open Delta (unbalanced load) amperage of high leg indicated.

USE COPPER WIRE ONLY

ELECTRICAL FORMULAS

$$\frac{\text{Watts}}{\text{Volts}} = \text{Amps} \quad \text{1-phase}$$

$$\frac{\text{Watts} \times .86}{\text{Volts}} = \text{Amps} \quad \begin{array}{l} \text{3-phase} \\ \text{(open delta)} \end{array}$$

$$\frac{\text{Watts}}{\text{Volts} \times 1.73} = \text{Amps} \quad \begin{array}{l} \text{3-phase} \\ \text{(balanced delta)} \end{array}$$

Watts	Volts	Phase	Amps	Breaker or Fuse size
24kW	208	1	115.4	150
	208	3	66.7	90
	240	1	100	125
	240	3	57.8	90
27kW	480	3	29.9	40
	600	3	23	30
	208	1	129.8	175
	208	3	75	100
30kW	240	1	112.5	150
	240	3	65	90
	480	3	32.5	50
	600	3	26	40
	208	1	144	200
36kW	208	3	83.3	125
	240	1	125	175
	240	3	72.3	100
	480	3	36	50
	600	3	28.9	40
39kW	208	1	173	225
	208	3	100	125
	240	1	150	200
	240	3	86.7	125
	480	3	43.3	60
	600	3	34.7	50
40.5kW	208	1	187.5	250
	208	3	108	150
	240	1	163.5	225
	240	3	94	125
	480	3	47	60
45kW	600	3	37.6	50
	208	3	112.5	150
	240	3	97.5	125
	480	3	48.8	70
	600	3	39	50
54kW	208	3	125	175
	240	1	188	250
	240	3	108	150
	480	3	54	70
	600	3	43.4	60
57kW	208	3	150	200
	240	3	130	175
	480	3	65	90
	600	3	52	70
57kW	208	3	158.4	200
	240	3	137.3	175
	480	3	68.6	90
	600	3	54.9	70