



# F-422MAK(-C)

MODULAR ICE MACHINE  
SLIM-LINE SERIES



F-422MAK



F-422MAK-C

F-422MAK(-C)  
08/01/25  
Item # 13743K

W x D x H  
24" x 26" x 39"\*

\*with 6" legs

Shipping Dimensions  
33" x 25 1/4" x 38 1/2"


**F-422MAK**  
Air-Cooled

**F-422MAK-C**  
Air-Cooled



## Features



- ▶ Front breathing allows for easier fit into tight places
- ▶ Factory-installed ultrasonic bin control can be adjusted on site
- ▶ Environmentally friendly R290 hydrocarbon refrigerant

- Stainless steel auger with greaseless bearing
- F-422MAK - Up to 485 lbs. of ice production per 24 hrs.
- F-422MAK-C - Up to 475 lbs. of ice production per 24 hrs.
- Built-in storage capacity of 2.7ft<sup>3</sup>/80 lbs.\*
- Advanced CleanCycle24™ design 
- 2-second flush cycle every hour
- Durable stainless steel exterior
- Convenient drop down door
- Front access for easier maintenance
- Removable air filters
- Equipped with 8 ft. cord with NEMA 5-15P Plug

### Warranty:


3 Year Parts & Labor on entire machine. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

\*Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft<sup>3</sup> average density of ice.


		ICE PRODUCTION		WATER USAGE		ELECTRICAL							
Condenser	Model	Air / Water Temp Lbs. per 24 hours 70°/ 50°F    90°/ 70°F		Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Min. Circuit/ Max. Fuse Size	Amperage	Voltage	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)	
	Air	F-422MAK  (Flaker)	485	380	12.0	N/A	4.9	15A	8.8A	115V/60/1	3,400	2.8 oz	150 / 175
	Air	F-422MAK-C  (Cubelet)	475	360	12.0	N/A	5.3	15A	8.8A	115V/60/1	3,400	2.8 oz	150 / 175

### Cube Dimensions\*

**Flaked**  
F-422MAK



**Cubelet**  
F-422MAK-C



\* approximate size in inches, image not to scale

### Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 108-127V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

### Service

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter (Air-cooled model only)
- Allow 24" (61 cm) clearance at top for removal of auger.
- Appliance should not be located next to high heat producing equipment.

### Plumbing

- Ice maker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Ice maker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Hoshizaki reserves the right to change specifications without notice.




# F-422MAK(-C)

MODULAR ICE MACHINE  
SLIM-LINE SERIES


F-422MAK(-C)  
08/01/25  
Item # 13743K

## FRONT VIEW

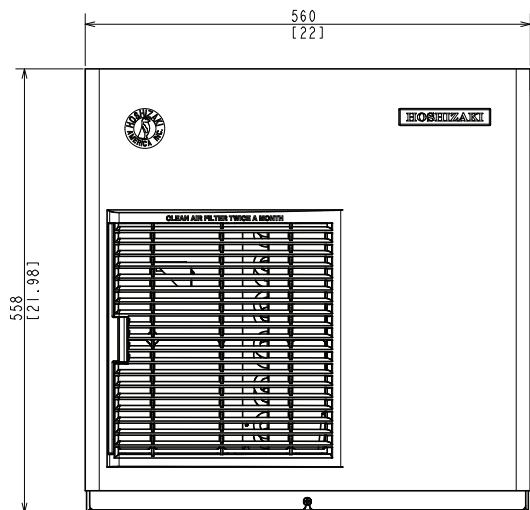


## SIDE VIEW

mm  
[inch]

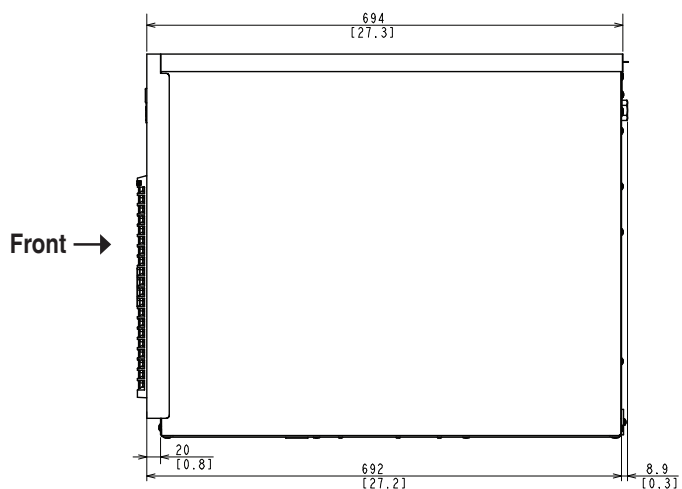

## REAR VIEW

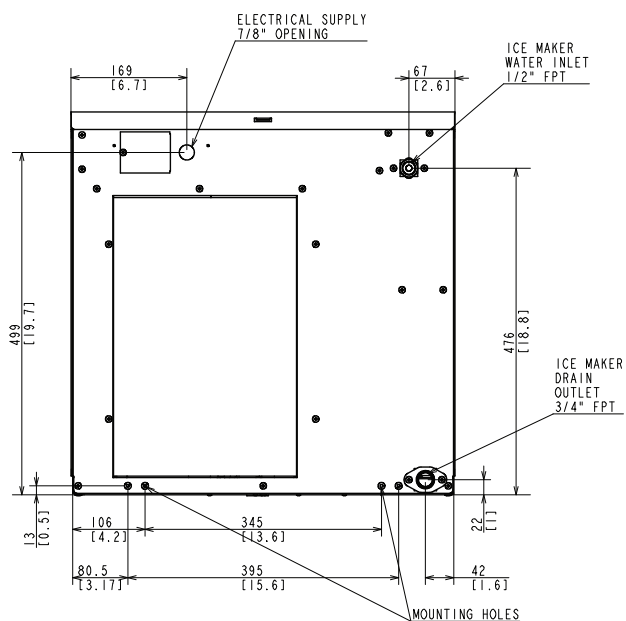

## BOTTOM VIEW

