



# F-622MAK-C

Modular Cubelet Ice Machine  
Slim-Line Dispenser Series



F-622MAK-C  
08/27/25  
Item # 13742

W x D x H  
22" x 24" x 26"


F-622MAK-C ★  
Air-Cooled



Item #: \_\_\_\_\_  
Project: \_\_\_\_\_  
Qty: \_\_\_\_\_  
AIA#: \_\_\_\_\_

## Features

- ▶ Durable stainless steel exterior
- ▶ Factory-installed ultrasonic bin control can be adjusted on site
- ▶ Environmentally friendly R290 hydrocarbon refrigerant

- Stainless steel auger with greaseless bearing
- Up to 650 lbs. of ice production per 24 hours
- 2 second flush cycle every hour
- Advanced CleanCycle24™ 
- Flush cycle removes sediment for cleaner ice

### Available on Bins:

B-250SF B-500SF B-700S B-800SF B-900SF

Top kit may be required; See Bin Spec Sheets.


### Warranty:

3 Year Parts & Labor on entire machine. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Shipping: (LxWxH) 28.5" x 26.75" x 32" Volume: 14.12ft<sup>3</sup>

| Condenser | Model      | ICE PRODUCTION   |   | WATER USAGE                                 |                                       | ELECTRICAL                         |          |           |  |                              |                              |                             |
|-----------|------------|--|---|---|---------------------------------------|------------------------------------|----------|-----------|--|------------------------------|------------------------------|-----------------------------|
|           |            | Air / Water Temp<br>Lbs. per 24 hours<br>70°/ 50°F 90°/ 70°F | Potable<br>Gal. per 100 lbs.<br>90°/ 70°F | Condenser<br>Gal. per 100 lbs.<br>90°/ 70°F | kWh Used<br>per 100 lbs.<br>90°/ 70°F | Min. Circuit/<br>Max. Fuse<br>Size | Amperage | Voltage   | Circuit<br>Wires<br>(including ground) | Heat<br>Rejection<br>BTU/hr. | Refrigerant<br>Charge Amount | Net / Ship<br>Weight (lbs.) |
| Air       | F-622MAK-C | 650 500  | 12.0                                      | N/A   | 9.55                                  | 20A                                | 8.9A     | 115V/60/1 | 3                                      | 6,000                        | 4.1 oz.                      | 176 / 185                   |

## Cube Dimensions\*



\* approximate size in inches, image not to scale

## Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 108-127V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

## Service

- Panels easily removed and all components accessible for service.
- Allow 24" (61 cm) clearance at top for removal of auger and 6" (15 cm) clearance at rear and sides for proper air circulation and ease of maintenance/service.

## Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
  - Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent
- Water-Cooled Model (Lines Must Be Independent of Ice maker)
- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
  - Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent

Hoshizaki reserves the right to change specifications without notice.




# F-622MAK-C


Modular Cubelet Ice Machine  
Slim-Line Dispenser Series

F-622MAK-C  
08/27/25  
Item # 13742


## FRONT VIEW

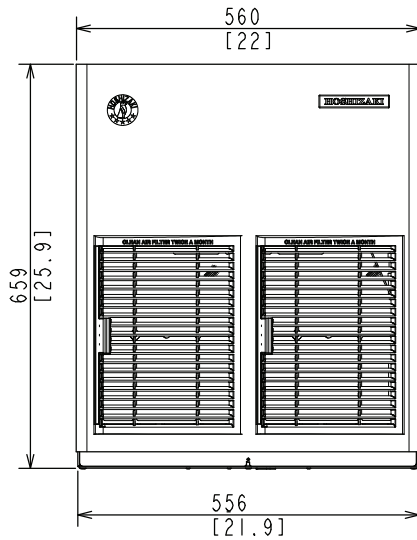

## SIDE VIEW

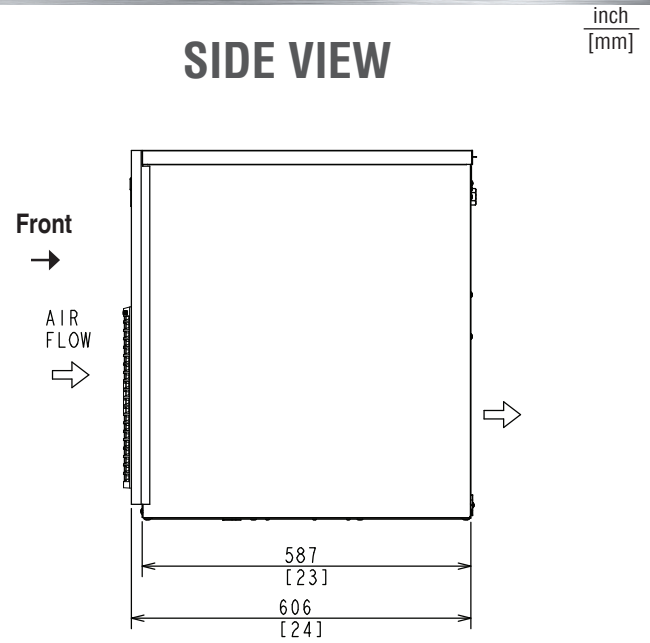

## REAR VIEW

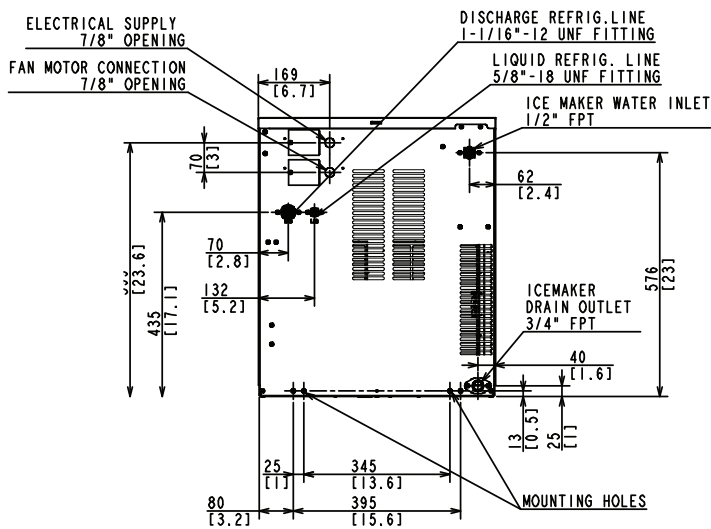

## BOTTOM VIEW

