

45GEW

Emergency Eye/Face Wash - Plumbed-in Type: Wall Mounted

Wall-mounted emergency eye/face wash with integral lid to protect the bowl and diffusers against dust and debris. This ANSI compliant, plumbed-in eye/face wash is designed to be quick and simple to operate with high flow rate aerated diffusers for improved washing and a flow regulator valve. Includes universal eye wash sign for enhanced visibility.



Specifications

MATERIALS OF CONSTRUCTION	
EYE/FACE WASH BOWL/LID	Acrylic Capped ABS
EYE/FACE WASH DIFFUSERS	Chrome plated brass with stainless steel mesh
OPERATING VALVE	Chrome plated brass
SERVICES	
WATER INLET	1/2 in Female NPT
DESIGN OPERATING PRESSURE	2.0 to 6 BAR G (29 to 87 PSI)
TEST PRESSURE	10.3 BAR G (149 PSI)
MINIMUM FLOW RATES	Eye/Face Wash: 11.4 liters/minute minimum (3 US Gallons)
ENVIRONMENTAL OPERATING TEMPERATURE	
MINIMUM AMBIENT OPERATING TEMPERATURE	5° C (41° F)
MAXIMUM AMBIENT OPERATING TEMPERATURE	35° C (95° F)
ACTIVATION/OPERATION	
EYE/FACE WASH	Pull lid forward to operate
NOMINAL WEIGHTS and DIMENSIONS	
DIMENSIONS (WxDxH)	343 mm (13.5 in) x 362 mm (14.3 in) x 227 mm (8.9 in)
WEIGHT	3 kg (7 lb)

HUGHES





HUGHES-SAFETY-SHOWERS.COM

Justrite Safety Group



RM07284 RevA

hughes-safety-showers.com


Emergency Eye/Face Wash - Plumbed in Type: Wall Mounted

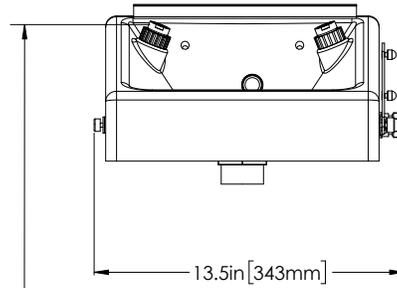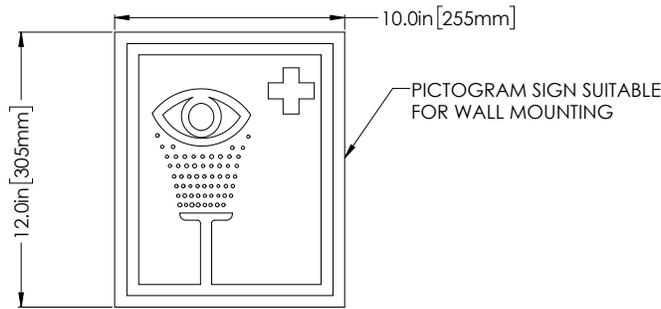

TO COMPLY WITH ANSI Z358.1: EYE/FACE WASH NOZZLES SHALL BE POSITIONED 33 in [83.8 cm] TO 45 in [114.3 cm] FROM STANDING SURFACE. FLUSHING FLUID SHALL NOT EXCEED 8 in [20.3 cm] ABOVE NOZZLES.

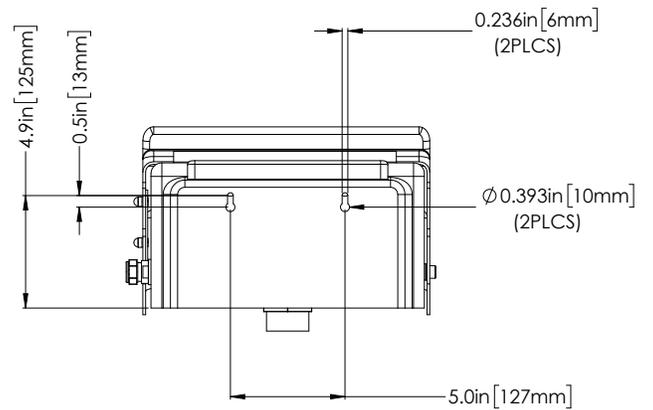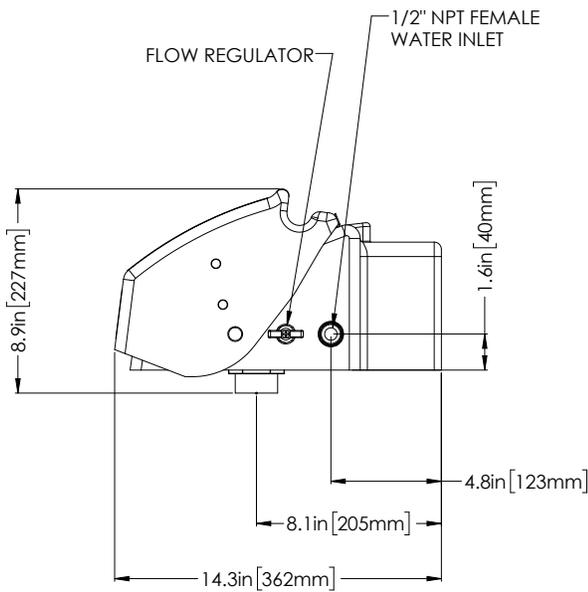

MOUNTING VIEW (MOUNTING HARDWARE NOT INCLUDED)

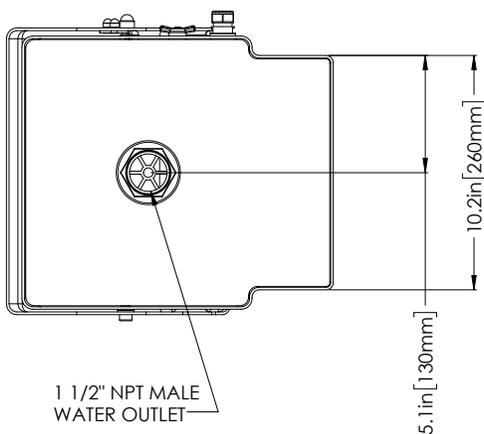

VARIATIONS IN MANUFACTURING AND ASSEMBLY ALLOW FOR ±1/8 in [3 mm] PER THREADED JOINT.

For Technical Support Contact:
customer.service@hughes-safety.com • 1-866-312-1652

For Reorder & Sales Support Contact:
custserv@justrite.com • 1-800-798-9250



HUGHES-SAFETY-SHOWERS.COM
Justrite Safety Group

Hughes North America
457 Campbell Street
Sarnia, Ontario N7T 2J1, Canada.