



Item # \_\_\_\_\_

Job \_\_\_\_\_

## SUPER ERECTA SHELF® WIRE SHELVING

- **Unique Design:** The open wire design of these shelves minimizes dust accumulation and allows free circulation of air, greater visibility of stored items and greater light penetration.
- **Durable Construction:** Super Erecta shelves and posts are constructed of heavy-gauge carbon steel or Type 304 stainless steel.
- **Choice of Finishes:** Super Erecta Brite™ and chrome-plated for dry storage; Metroseal 3™ with Microban® antimicrobial product protection and stainless steel for corrosive environments; and attractive epoxy color options for merchandising applications.
- **Versatile:** Super Erecta Shelf® wire shelving can adapt to your changing needs. By using various accessories, hundreds of shelving configurations become possible.
- **Fast, Secure Assembly:** SiteSelect™ Posts have a double groove visual guide feature every 8" (203mm), circular grooves at 1" (25mm) increments, and are numbered at 2" (50mm) intervals. A patented, tapered split sleeve snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Shelf is assembled in minutes without the use of any special tools.
- **Adjustability:** Shelves can be adjusted at 1" (25mm) intervals along the entire length of the post.
- **Shelf Ribs:** Run front to back, allowing you to slide items on and off shelves smoothly.
- **Shelf Accessibility:** Shelves can be loaded/unloaded easily from all sides. This open construction allows maximum use of storage cube.
- **Adjustable Feet:** Bolt levelers compensate for surface irregularities.

**Note:** Stainless stationary posts are equipped with stainless steel leveling feet.



\*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



**InterMetro Industries Corporation**  
North Washington Street  
Wilkes-Barre, PA 18705  
[www.metro.com](http://www.metro.com)




**Wire Shelving**

**10.01**



## Wire Shelves

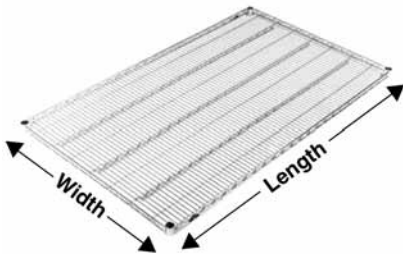

Split Sleeve



Aluminum  
Split Sleeve

- **Metroseal 3:** Metro's proprietary epoxy coating contains Microban® antimicrobial product protection. Microban antimicrobial protects the epoxy coating from bacteria, mold, mildew, and fungus that cause odors, stains, and product degradation.
- See spec sheet 10.14 for epoxy color options.
- Plastic split sleeves are included with each shelf  
Replacements are available: Cat. No. 9985 (bag of 4)
- Aluminum split sleeves are recommended for abusive mobile applications and autoclave applications.  
Cat. No. 9986Z (bag of 4 with zinc C-rings)  
Cat. No. 9986S (bag of 4 with stainless steel C-rings)
- Load capacity (evenly distributed) per shelf  
Depths: 14" to 24" (355 to 610mm)  
800 lbs. (363kg) for lengths of 18" to 48" (457 to 1219mm)  
600 lbs. (272kg) for lengths of 54" (1370mm) or longer
- Load capacity (evenly distributed) per unit.  
Stationary shelving units have a maximum load capacity (evenly distributed) of 2,000 lbs. (907kg)  
Mobile units have a maximum capacity of three times the caster load rating up to but not exceeding 1,000 lbs. (453kg) total. Consult the Metro catalog for caster load ratings
- SUPER ERECTA SHELF meets Government Specifications MIL-S-40144E.

| Model No.<br>Super Erecta Brite | Model No.<br>Chrome | Model No.<br>Metroseal 3 with Microban® | Model No.<br>Stainless | Nominal Width/Length<br>(in.) (mm) |          | Approx.<br>Pkd. Wt.<br>(lbs.) (kg) |      |
|---------------------------------|---------------------|-----------------------------------------|------------------------|------------------------------------|----------|------------------------------------|------|
| 1424BR                          | 1424NC              | 1424NK3                                 | 1424NS                 | 14x24                              | 355x610  | 6                                  | 2.7  |
| 1430 BR                         | 1430NC              | 1430NK3                                 | 1430NS                 | 14x30                              | 355x760  | 7                                  | 3.2  |
| 1436BR                          | 1436NC              | 1436NK3                                 | 1436NS                 | 14x36                              | 355x914  | 8                                  | 3.6  |
| 1442BR                          | 1442NC              | 1442NK3                                 | 1442NS                 | 14x42                              | 355x1066 | 9½                                 | 4.3  |
| 1448BR                          | 1448NC              | 1448NK3                                 | 1448NS                 | 14x48                              | 355x1219 | 10½                                | 4.7  |
| 1460BR                          | 1460NC              | 1460NK3                                 | 1460NS                 | 14x60                              | 355x1524 | 14                                 | 6.3  |
| 1472BR                          | 1472NC              | 1472NK3                                 | 1472NS                 | 14x72                              | 355x1829 | 17                                 | 7.7  |
| 1824BR                          | 1824NC              | 1824NK3                                 | 1824NS                 | 18x24                              | 457x610  | 7                                  | 3.2  |
| 1830BR                          | 1830NC              | 1830NK3                                 | 1830NS                 | 18x30                              | 457x760  | 8                                  | 3.6  |
| 1836BR                          | 1836NC              | 1836NK3                                 | 1836NS                 | 18x36                              | 457x914  | 9½                                 | 4.3  |
| 1842BR                          | 1842NC              | 1842NK3                                 | 1842NS                 | 18x42                              | 457x1066 | 11                                 | 5.0  |
| 1848BR                          | 1848NC              | 1848NK3                                 | 1848NS                 | 18x48                              | 457x1219 | 12                                 | 5.4  |
| 1854BR                          | 1854NC              | 1854NK3                                 | 1854NS                 | 18x54                              | 457x1370 | 14½                                | 6.6  |
| 1860BR                          | 1860NC              | 1860NK3                                 | 1860NS                 | 18x60                              | 457x1524 | 17                                 | 7.7  |
| 1872BR                          | 1872NC              | 1872NK3                                 | 1872NS                 | 18x72                              | 457x1829 | 20                                 | 9.1  |
| 2124BR                          | 2124NC              | 2124NK3                                 | 2124NS                 | 21x24                              | 530x610  | 8                                  | 3.6  |
| 2130BR                          | 2130NC              | 2130NK3                                 | 2130NS                 | 21x30                              | 530x760  | 9                                  | 4.1  |
| 2136BR                          | 2136NC              | 2136NK3                                 | 2136NS                 | 21x36                              | 530x914  | 11                                 | 5.0  |
| 2142BR                          | 2142NC              | 2142NK3                                 | 2142NS                 | 21x42                              | 530x1066 | 12                                 | 5.4  |
| 2148BR                          | 2148NC              | 2148NK3                                 | 2148NS                 | 21x48                              | 530x1219 | 14                                 | 6.4  |
| 2154BR                          | 2154NC              | 2154NK3                                 | 2154NS                 | 21x54                              | 530x1370 | 16                                 | 7.3  |
| 2160BR                          | 2160NC              | 2160NK3                                 | 2160NS                 | 21x60                              | 530x1524 | 18                                 | 8.2  |
| 2172BR                          | 2172NC              | 2172NK3                                 | 2172NS                 | 21x72                              | 530x1829 | 24                                 | 10.9 |
| 2424BR                          | 2424NC              | 2424NK3                                 | 2424NS                 | 24x24                              | 610x610  | 9                                  | 4.1  |
| 2430BR                          | 2430NC              | 2430NK3                                 | 2430NS                 | 24x30                              | 610x760  | 11                                 | 5.0  |
| 2436BR                          | 2436NC              | 2436NK3                                 | 2436NS                 | 24x36                              | 610x914  | 13                                 | 5.9  |
| 2442BR                          | 2442NC              | 2442NK3                                 | 2442NS                 | 24x42                              | 610x1066 | 15                                 | 6.8  |
| 2448BR                          | 2448NC              | 2448NK3                                 | 2448NS                 | 24x48                              | 610x1219 | 16                                 | 7.3  |
| 2454BR                          | 2454NC              | 2454NK3                                 | 2454NS                 | 24x54                              | 610x1370 | 19                                 | 8.6  |
| 2460BR                          | 2460NC              | 2460NK3                                 | 2460NS                 | 24x60                              | 610x1524 | 21                                 | 9.5  |
| 2472BR                          | 2472NC              | 2472NK3                                 | 2472NS                 | 24x72                              | 610x1829 | 26                                 | 11.8 |

**Note:** 14" (355mm) deep units.

Free-standing units: Foot plates should be used and secured to the floor.


Mobile units: maximum allowable post height is 54" (1370mm).

## SiteSelect™ Posts

### Stationary Posts

Stationary posts are equipped with a leveling bolt to account for uneven floors.

- Height includes leveling bolt (completely tightened) and post cap. Leveling bolt can be adjusted 1/2" (13mm).
- Foot plates may be ordered separately and installed in place of leveling foot.
- Replacement leveling bolts  
Zinc Cat. No. RPF04-004 Stainless Steel Cat. No. RPF04-004C
- Replacement post cap for standard posts  
Black Cat. No. RPC06-035



**SiteSelect Posts feature double grooves every 8" (203mm) to aid assembly.**

| Model No.<br>Chrome | Model No.<br>Metroseal 3<br>with Microban | Model No.<br>Stainless Steel | Height<br>(in.) (mm)            |      | Approx.<br>Pkd. Wt.<br>(lbs.) (kg) |      |
|---------------------|-------------------------------------------|------------------------------|---------------------------------|------|------------------------------------|------|
| 7P                  |                                           |                              | 7 <sup>3</sup> / <sub>8</sub>   | 187  | 1/2                                | 0.3  |
| 13P                 | 13PK3                                     | 13PS                         | 14 <sup>3</sup> / <sub>8</sub>  | 365  | 1                                  | 0.5  |
| 27P                 |                                           | 27PS                         | 28 <sup>3</sup> / <sub>8</sub>  | 720  | 1 <sup>3</sup> / <sub>4</sub>      | 0.75 |
| 33P                 | 33PK3                                     | 33PS                         | 34 <sup>3</sup> / <sub>8</sub>  | 873  | 2                                  | 0.9  |
| 54P                 | 54PK3                                     | 54PS                         | 54 <sup>7</sup> / <sub>16</sub> | 1382 | 3                                  | 1.4  |
| 63P                 | 63PK3                                     | 63PS                         | 62 <sup>7</sup> / <sub>16</sub> | 1585 | 3 <sup>1</sup> / <sub>2</sub>      | 1.6  |
| 74P                 | 74PK3                                     | 74PS                         | 74 <sup>1</sup> / <sub>2</sub>  | 1892 | 4                                  | 1.8  |
| 86P                 | 86PK3                                     | 86PS                         | 86 <sup>1</sup> / <sub>2</sub>  | 2197 | 5                                  | 2.3  |
| *96P                |                                           |                              | 96 <sup>1</sup> / <sub>2</sub>  | 2450 | 5 <sup>1</sup> / <sub>2</sub>      | 2.5  |

\*96P should not be used on units less than 24" (610mm) deep. Consult Metro Engineering for alternate recommendations.

### Mobile Posts (For use with Stem Casters)

- Height includes post cap.

| Model No.<br>Chrome | Model No.<br>Metroseal 3<br>with Microban | Model No.<br>Stainless Steel | Height<br>(in.) (mm)             |      | Approx.<br>Pkd. Wt.<br>(lbs.) (kg) |      |
|---------------------|-------------------------------------------|------------------------------|----------------------------------|------|------------------------------------|------|
| 27UP                |                                           | 27UPS                        | 27 <sup>3</sup> / <sub>4</sub>   | 704  | 1 <sup>3</sup> / <sub>4</sub>      | 0.75 |
| 33UP                | 33UPK3                                    | 33UPS                        | 33 <sup>3</sup> / <sub>4</sub>   | 857  | 2                                  | 0.9  |
| 54UP                | 54UPK3                                    | 54UPS                        | 53 <sup>13</sup> / <sub>16</sub> | 1366 | 3                                  | 1.4  |
| 63UP                | 63UPK3                                    | 63UPS                        | 61 <sup>13</sup> / <sub>16</sub> | 1570 | 3 <sup>1</sup> / <sub>2</sub>      | 1.6  |
|                     | 70UPK3                                    |                              | 69 <sup>3</sup> / <sub>4</sub>   | 1771 | 3 <sup>3</sup> / <sub>4</sub>      | 1.7  |
| 74UP                | 74UPK3                                    | 74UPS                        | 73 <sup>7</sup> / <sub>8</sub>   | 1876 | 4                                  | 1.8  |
| 86UP                | 86UPK3                                    | 86UPS                        | 85 <sup>7</sup> / <sub>8</sub>   | 2181 | 4 <sup>1</sup> / <sub>2</sub>      | 2.0  |

### Staked Posts (For use with Truck Dollies)

- Each post connects to the truck dolly through the stem receptacle. The stem receptacle is staked into the bottom of the post to ensure a durable connection in abusive mobile applications.
- Each includes a leveling/connecting bolt.

| Model No.<br>Chrome | Model No.<br>Stainless Steel | Height<br>(in.) (mm)            |      | Approx.<br>Pkd. Wt.<br>(lbs.) (kg) |     |
|---------------------|------------------------------|---------------------------------|------|------------------------------------|-----|
| 54P-STKD            | 54PS-STKD                    | 54 <sup>7</sup> / <sub>16</sub> | 1382 | 3                                  | 1.4 |
| 63P-STKD            | 63PS-STKD                    | 62 <sup>7</sup> / <sub>16</sub> | 1585 | 3 <sup>1</sup> / <sub>2</sub>      | 1.6 |
| 74P-STKD            | 74PS-STKD                    | 74 <sup>1</sup> / <sub>2</sub>  | 1892 | 4                                  | 1.8 |

### Swedged Posts (For use with Stem Casters in Cart Wash Applications)

- Each post has an aluminum cap swedged into the top of the post.

| Model No.<br>Stainless Steel | Height<br>(in.) (mm)             |      | Approx.<br>Pkd. Wt.<br>(lbs.) (kg) |     |
|------------------------------|----------------------------------|------|------------------------------------|-----|
| 33UPS-SW                     | 33 <sup>3</sup> / <sub>4</sub>   | 857  | 2                                  | 0.9 |
| 54UPS-SW                     | 53 <sup>13</sup> / <sub>16</sub> | 1366 | 3                                  | 1.4 |
| 63UPS-SW                     | 61 <sup>13</sup> / <sub>16</sub> | 1570 | 3 <sup>1</sup> / <sub>2</sub>      | 1.6 |

### Special Length Posts

Special length cut posts are available. Consult your Metro representative for more information.



## SUPER ERECTA SHELF® WIRE SHELVING

### Super Wide Shelving

- **High-density Storage:** Super Wide™ shelves have a greater storage area for holding large quantities of supplies, especially large, bulky objects, providing maximum storage in minimum space.
- **Load Capacity** (evenly distributed) per shelf:  
Depths: 30" and 36" (760 and 914mm)  
600 lbs. (272kg) for lengths 48" (1219mm) or shorter.  
400 lbs. (181kg) for lengths 54" (1370mm) or longer.

| Model No.<br>Chrome | Model No.<br>Metroseal 3<br>with Microban | Model No.<br>Stainless Steel | Nominal Width/Length<br>(in.) (mm) |          | Approx.<br>Pkd. Wt.<br>(lbs.) (kg) |      |
|---------------------|-------------------------------------------|------------------------------|------------------------------------|----------|------------------------------------|------|
| 3036NC              | 3036NK3                                   | 3036NS                       | 30x36                              | 760x914  | 15                                 | 6.8  |
| 3048NC              | 3048NK3                                   | 3048NS                       | 30x48                              | 760x1219 | 21                                 | 9.5  |
| 3060NC              | 3060NK3                                   | 3060NS                       | 30x60                              | 760x1524 | 26 1/2                             | 11.8 |
| 3072NC              | 3072NK3                                   | 3072NS                       | 30x72                              | 760x1829 | 31                                 | 14.0 |
| 3636NC              | 3636NK3                                   | 3636NS                       | 36x36                              | 910x914  | 18                                 | 8.2  |
| 3648NC              | 3648NK3                                   | 3648NS                       | 36x48                              | 910x1219 | 23                                 | 10.4 |
| 3660NC              | 3660NK3                                   | 3660NS                       | 36x60                              | 910x1524 | 29                                 | 13.1 |
| 3672NC              | 3672NK3                                   | 3672NS                       | 36x72                              | 910x1829 | 34 1/2                             | 15.4 |



### Foot Plates

- Use to bolt units to the floor, or when a broader, more stable foot is desired. Foot plates also help to protect floors by distributing the point load of the shelving unit across a larger contact point.
- Foot plates (completely tightened) add 1/8" (3mm) to the specified heights of each stationary post on the table.  
Zinc Cat. No. 9993Z  
Stainless Steel Cat. No. 9993S



### "S" Hook

- Used to add on shelving units with only two posts required. Order two per shelf level.  
Cat. No. 9995Z



All Metro Catalog Sheets are available on our Web Site: [www.metro.com](http://www.metro.com)



#### InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705  
Phone: 570-825-2741  
Fax: 570-825-2852

L02-006  
Printed in U.S.A. Rev. 11/08

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2008 InterMetro Industries Corp.

For Product Information:  
U.S. and Canada: 1.800.433.2232

Latin America: 1.561.333.3824  
Europe: +31.76.587.7550

Asia/Pacific: +65.6567.8003  
Middle East/Africa: +971.4.811.8286