



Item# _____

Job _____



METRO MOBILE DELIVERY/STORAGE CABINETS

- **Many Uses:** Delivery/storage cabinets can be used to hold food in various stages of preparation or to deliver prepared food to the place it is served.
- **Sturdy:** Top and bottom corners are reinforced with aluminum castings. This feature, plus a stabilizing bar inside, keep cabinets square and rigid.
- **Strong and Lightweight:** Delivery/storage cabinets are made of .063 inch (1.6mm) and .100 inch (2.5mm) aluminum for strength without excess weight.
- **Saves Space:** When opened, the continuous hinged door fits into a protective recess along the side wall so cabinets can be placed flush against one another to save space.
- **Easy to Open and Close:** The door can be opened or closed easily by either right or left-handed operators. Dual purpose gravity "slam" latch holds door closed securely or completely opened.
- **Designed for Easy Cleaning:** Unitized extruded aluminum slide panels and smooth, obstruction-free chassis permit thorough cleaning. Unique integral hinge design stays clean and sanitary.
- **Four Sizes:** Cabinets come in sizes from 35³/₄" to 71³/₄" (908 x 1822mm) high to meet every need. Extruded aluminum slide panels hold 18" x 26" (455 x 660mm) sheet pans on 1¹/₂" (38mm) centers.
- **Lockable Door**





InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com

METRO MOBILE DELIVERY/STORAGE CABINETS



SPECIFICATIONS:

- **Material:** .063" (1.6mm) and .100" (2.5mm) high strength aluminum alloy and aluminum alloy extrusions.
- **Top:** .063" (1.6mm) aluminum formed into box section, reinforced with cast aluminum corners.
- **Bottom:** .100" (2.5mm) aluminum formed into box section, reinforced with cast aluminum corners. Provides clean, smooth, obstruction-free floor.
- **Sides:** All extruded aluminum including bulb-tipped tray slides on 1½" (38mm) centers.
- **Back:** .063" (1.6mm) aluminum brake-formed from flat stock to interlock with rear corner posts.
- **Door:** .100" (2.5mm) aluminum reinforced with extruded door pull; extruded door hinge; door swings 270 degrees and recedes into side wall with door stay; dual purpose gravity "slam" latch holds door closed or fully opened.
- **Casters:** Two B5DN on back — 5" (127mm) double ball bearing swivel, ball bearing axle, nickel-plated, donut neoprene-tired, pre-lubricated, bolted through separate full-length angle-formed 1/8" (3.2mm) thick aluminum plates to bottom of chassis. Two B5DNB on front — same as above, with wheel brake.

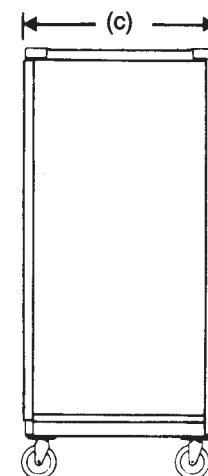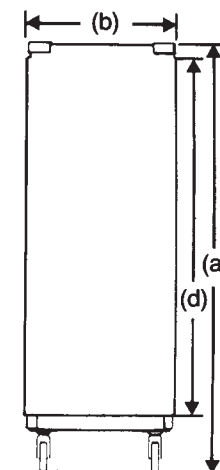

DIMENSIONS:

Model No.	(a) Height (in.) (mm)	(b) Width (in.) (mm)	(c) Depth (in.) (mm)	(d) Inside Height (in.) (mm)	Slide Spacing (in.) (mm)	No.	Pan Capacity Size (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)
DSC6N	59¾ 1517	22¾ 568	28¾ 720	48¾ 1238	1½ 38	32	18 x 26 445 x 660	98 44
DSC7N	71¾ 1822	22¾ 568	28¾ 720	60¾ 1543	1½ 38	40	18 x 26 445 x 660	108 49

ACCESSORY

Model
A71 Floor Lock

Manufactured by:



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741 • Fax: 570-825-2852
For Product Information Call: 1-800-433-2232
Visit Our Web Site: www.metro.com

L02-064
Rev. 12/00 BJ
Printed in U.S.A.
Information and specifications are subject to change without notice. Please confirm at time of order.