

MODEL C1300 Hot Water Dispenser

APPLICATION: Designed for large volume usage of steaming hot water. Up to 100 cups of 200° hot water per hour are provided by the system's 2/3-gallon tank. Saves time, work and water - you only heat the water you use.

FEATURES

- Foodservice grade heating element provides 100 cups of near-boiling water per hour
- Swiveling gooseneck spout travels 90° to provide clearance for large vessels
- Easy-action lever with automatic shut-off
- · Durable all brass faucet with polished chrome finish
- 2/3-gallon Stainless Steel Tank construction for longer life
- Easy-to-adjust temperature control on front panel
- Mounts in standard sink opening or 1-1/4" drilled hole
- Tool-free tank connections and dry start protection for easy installation
- 1-year full warranty on parts and labor

SPECIFICATIONS

2/3-gallon tank dispenses 100 cups Capacity

of 200°F water per hour

120 Volts A.C., 1300 Watts, 10.8 amp **Electrical**

heating element with 36" cord and

grounded plug

Thermostat Snap action, adjustable from

160°F to 210°F (factory pre-set

at approximately 200°F)

Meets U.L. 94HF-1 Insulation

flammability specification

Valve Instant, self-closing

Recommended 30-125 psi


Supply Pressure

Shipping Weight Approximately 11.5 lbs.

To ensure optimum performance, maximum distance between tank and base of faucet should be 14-1/2" or less.



DIMENSIONS

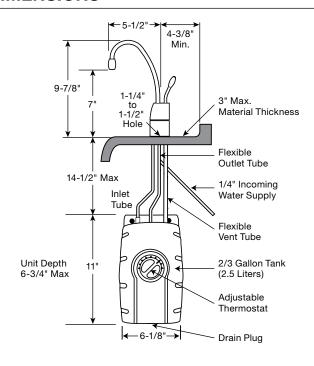

Our products appear on The KCL CADalog CD-ROM based CAD Foodservice Symbol Library. More information is available from Kochman Consultants, Ltd. at www.kclcad.com.

















F294-12B-45-02 | Printed in U.S.A.