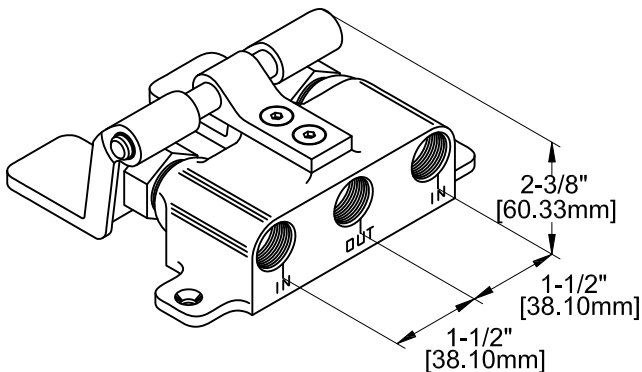
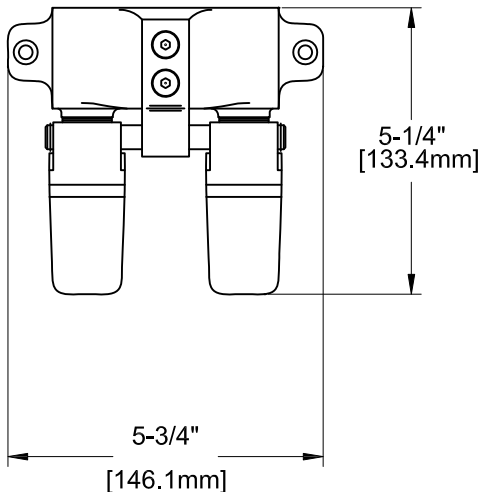
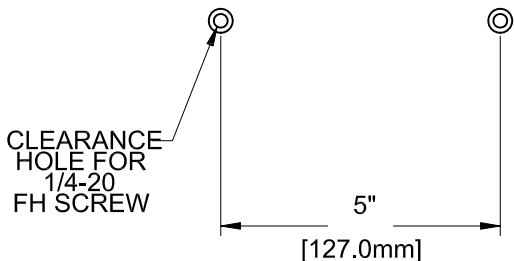



APPLICATION:		PRODUCT NAME: STAINLESS STEEL DUAL FLOOR FOOT VALVE	
JOB NAME:		<input type="checkbox"/> SPECIAL CONFIGURATION <input type="checkbox"/> CHECK BASE MODEL AND OPTIONS	
QUANTITY:	ITEM NO.	MODEL:  <input type="checkbox"/> 47988	
  <p>ROUGH-IN:</p>  <p>ANSI/A112.18.1M</p>		OPTIONS OR MODIFICATIONS: <input type="checkbox"/> SUPPLY LINES (24" OR 36") CIRCLE LENGTH <input type="checkbox"/> NIPPLES <input type="checkbox"/> ELBOWS <input type="checkbox"/> HANDLES (CROSS OR WRIST) CIRCLE STYLE <input type="checkbox"/> VANDAL RESISTANT KIT <input type="checkbox"/> OTHER _____	
		FEATURES  * PEDAL ANODIZED ALUMINUM * CYLINDER CLOSSES WITH WATER FLOW * POLISHED CHROME  RECOMMENDED SETTINGS * 110°F AT 80 PSI  SYSTEM LIMITS * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE 200 PSI MAX. STATIC  SHIPPING WEIGHT * 3.5 LBS	
		 FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com	