

Ergo-One® System Utility Carts

Tough Transport - Stainless Steel Ergonomic Carts

Models 7120, 7130, 7140

Spec. # _____

AIA # _____




Model 7120

Reduce Injuries Caused By Improper Pushing, Lifting And Loading

- Shelf heights are in the safe loading and unloading zone
- Top shelf height from the floor is 40" (1016 mm), bottom shelf is 20" (508 mm) from the floor
- Vertical handles make pushing a loaded cart safe and natural
- 1000 lb. (450 kg.) capacity
- Stainless steel shelves and frame joints feature continuous heliarc welding
- Easy-to-clean and sanitize



Ergonomic Vertical Handles

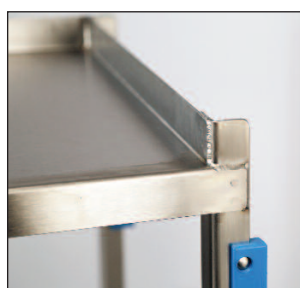

Fully-Welded Joints



Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakesideFoodservice.com

Ergo-One® System Utility Carts

Models



7120

7130

7140

Tough Transport - Stainless Steel Ergonomic Carts

Top View

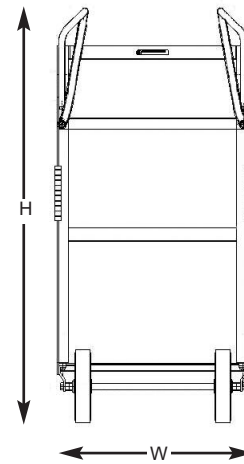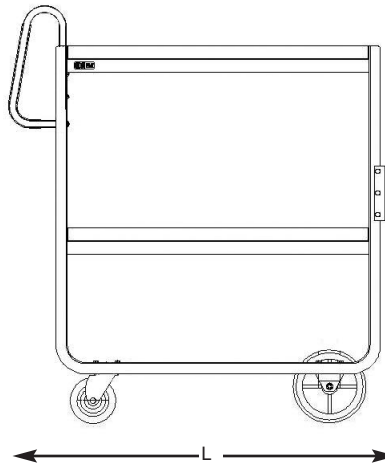

AutoCAD drawings available through KCL CADalog

Model Information

Model	# of	Shelf Description		Overall Size			Case Weight	
		Size	Clearance	W	L	H*	lb.	(kg.)
7120	2	21" x 33" (533 x 838)	18-1/2" (470)	21-5/8" (549)	41-3/8" (1051)	46-3/4" (1187)	88	(39.9)
7130	2	21" x 49" (533 x 1245)	18-1/2" (470)	21-5/8" (549)	57-7/16" (1459)	46-3/4" (1187)	123	(55.8)
7140	2	24" x 42" (610 x 1067)	18-1/2" (470)	24-5/8" (625)	50-7/16" (1281)	46-3/4" (1187)	126	(57.2)

Measurements in () denote metric millimeters, unless otherwise specified.

*Includes height of ergonomic handles. Handle assembly required.

Top shelf height from floor is 40" (1016).

Specifications

Unit shall be of fully welded stainless steel construction with an overall carrying capacity of 1000 pounds. Legs and frame shall be of U-frame design, eliminating the need for corner reinforcements. Leg/frame shall be .120 x 1" x 1" angle stainless steel. Shelves shall be of 14-gauge stainless steel and shall be continuously TIG welded to vertical leg frames. Shelves shall be reinforced front and back with 18-gauge angle welded to the shelf underside. Bottom shelf shall be positioned no closer than 20" (508 mm) from the floor surface, and top shelf shall be positioned no higher than 40" (1016 mm) from the floor surface. Push handles shall be of ergonomic vertical design and shall feature 8" (203 mm) range grip height. Unit shall have two each 5" (127 mm) diameter extra-load swivel casters with 1-1/4" wide non-marking polyurethane wheels and two each 8" diameter extra-load wheels mounted to a fixed axle. Swivel casters shall be plate type and shall be bolted to an 18-gauge 5" wide stainless steel cross member with a galvanized reinforcement. Unit shall have two each 6" (152 mm) vertical bumpers riveted to front legs. Unit shall be NSF listed.

Optional Accessories

- ☐ Extended perimeter bumper
- ☐ All 5" swivel casters
- ☐ Set of two each 5" brake casters
- ☐ Ground and polished joint welds



Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446

info@eLakeside.com • www.eLakesideFoodservice.com

Ergo-One® System Utility Carts

Medium Duty Stainless Steel Ergonomic Carts

Models

6800, 6810, 6820, 6830



Model 6820

Reduce Injuries Caused By Improper Pushing, Lifting And Loading

- Both stainless steel shelves are in the “safe zone” for repetitive loading and unloading
- Durable, easy-to-clean and sanitize stainless steel
- Fully welded construction for added durability
- Protective leg bumpers and comfortable handle grips
- 500 lb. (230 kg.) capacity is ideal for constant use over standard floor surfaces

Spec. #

A/A #

Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.


800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakesideFoodservice.com

Ergo-One® System Utility Carts

Medium Duty Stainless Steel Ergonomic Carts

Models

6800, 6810
6820, 6830

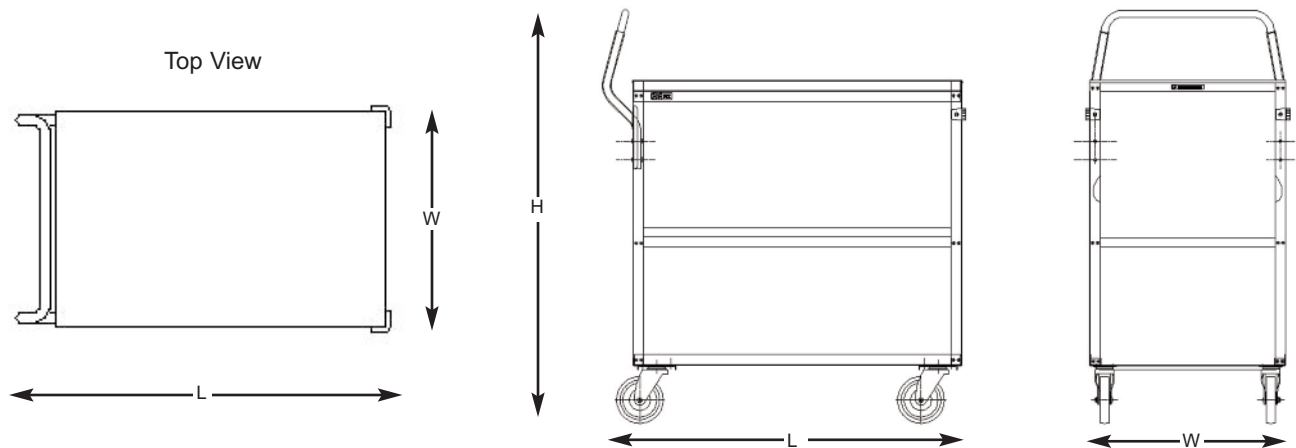

AutoCAD drawings available through KCL CADalog

Model Information

Model	# of	Shelf Description		Top Shelf Height*	Overall Size			Lake-Glide® Casters		Case Weight	
		Size	Clearance		W	L	H**	Type	Dia.	lb.	(kg.)
6800	2	15-1/2" x 24" (394 x 610)	14-1/8" (359)	35-1/4" (895)	16-1/2" (419)	28" (711)	44-3/8" (1127)	All swivel cushion tread	5" (127)	32	(14.5)
6810	2	18" x 27" (457 x 686)	14-1/8" (359)	35-1/4" (895)	19" (483)	31-1/8" (791)	44-3/8" (1127)	All swivel cushion tread	5" (127)	35	(15.9)
6820	2	21" x 35" (533 x 889)	14-1/2" (368)	35-3/4" (908)	22" (559)	39-1/8" (994)	44-3/8" (1127)	All swivel cushion tread	5" (127)	61	(27.6)
6830	2	21" x 49" (533 x 610)	14-1/2" (368)	35-3/4" (908)	22" (559)	53-1/8" (1400)	44-3/8" (1127)	2-swivel, 2-fixed cushion tread	5" (127)	88	(39.9)

*Measured from floor.

**Includes height of ergonomic handles. Handle assembly is required.

Measurements in () denote metric millimeters, unless otherwise specified.

Specifications

Unit shall be of fully welded unitized construction with an overall carrying capacity of 500 lb. (230 kg). Corner legs shall be of 16-gauge angle stainless steel. Shelves shall be of 20-gauge stainless steel with long shelf edges double hemmed for extra strength and shall be electronically spot welded to upright legs at all points. Bottom shelf shall be positioned no closer than 20" (508 mm) from the floor surface, and top shelf shall be positioned no higher than 36" (914 mm) from the floor surface. Push handles shall be of ergonomic vertical design and shall feature 8" (203 mm) range grip height. Unit shall have corner bumpers mounted to front legs. Four each 5" (127 mm) swivel casters with non-marking polyurethane wheels shall be mounted to cross members of 18-gauge stainless steel.

Models 6820 and 6830 only:

Top shelf shall have 16-gauge angle reinforcements welded to long shelf edges.

Optional Accessories

- ☐ Set of two each brake casters
- ☐ Clear vinyl slipover box type cover



Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446
info@eLakeside.com • www.eLakesideFoodservice.com

Ergo-One® System Utility Carts

Heavy Duty Stainless Steel - 700 lb. Capacity

Models

5910, 5915, 5920, 5925, 5930
7010, 7015, 7020, 7025, 7030



Model 7025

Reduce Injuries Caused By Improper Pushing, Lifting and Loading

- Shelf heights are in the safe range for repetitive loading and unloading
- Top shelf height from the floor is 40"- 43", bottom shelf is 20"
- Vertical handles are at a comfortable height for all users
- All-welded stainless steel construction for added strength
- Protective leg bumpers and comfortable handle grips
- Easy-to-clean and sanitize, simply wipe down or steam clean
- NSF listed models are available
- 700 lb. (320 kg) capacity is ideal for constant moving of heavy loads over various standard floor surfaces



Spec. #

A/A #

Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakesideFoodservice.com


Ergo-One® System Utility Carts

Models

5910, 5915, 5920, 5925, 5930
7010, 7015, 7020, 7025, 7030

Heavy Duty

AutoCAD drawings available through KCL CADalog

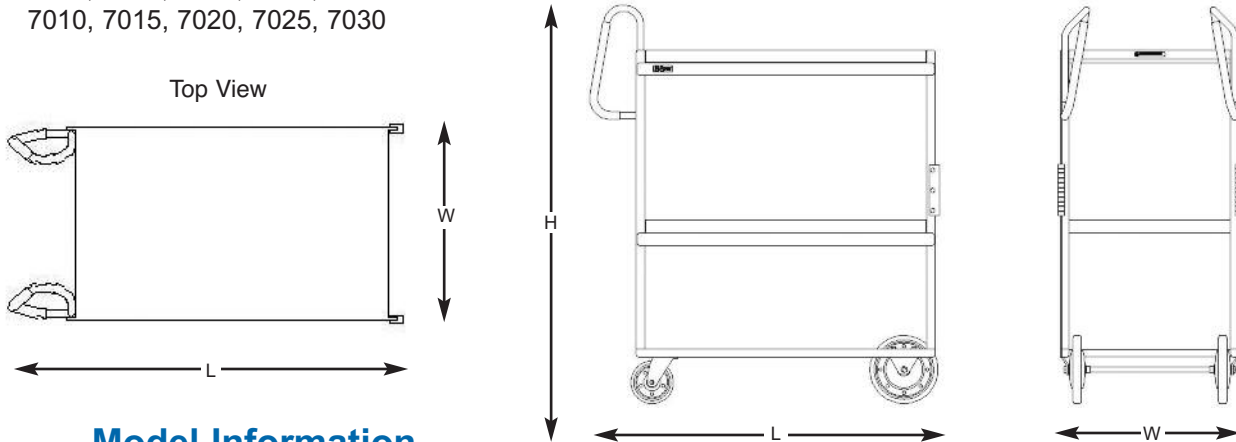

Model Information

Model	NSF Model	Shelf Description			Top Shelf Height*	Overall Size			Case Weight	
		# of	Size	Clearance		W	L	H**	lb.	(kg.)
7010	5910	2	18" x 27" (457 x 686)	18-1/2" (470)	40" (1016)	18-5/8" (473)	35-3/8" (899)	46-3/4" (1187)	53	(24)
7015	5915	3	18" x 27" (457 x 686)	10" (254)	43" (1092)	18-5/8" (473)	35-3/8" (899)	46-3/4" (1187)	63	(28.6)
7020	5920	2	21" x 33" (533 x 838)	18-1/2" (470)	40" (1016)	21-5/8" (549)	41-3/8" (1051)	46-3/4" (1187)	64	(29)
7025	5925	3	21" x 33" (533 x 838)	10" (254)	43" (1092)	21-5/8" (549)	41-3/8" (1051)	46-3/4" (1187)	78	(35.4)
7030	5930	2	21" x 49" (533 x 1245)	18-1/2" (470)	40" (1016)	21-5/8" (549)	57-3/16" (1453)	46-3/4" (1187)	87	(39.5)

*Measured from floor.

**Includes height of ergonomic handles. Handle assembly is required.

Measurements in () denote metric millimeters, unless otherwise specified.

Specifications

Unit shall be of fully welded stainless steel construction. Legs and frame shall be of .120 x 1" x 1" angle stainless steel and shall be joined with a continuous arc weld. Shelves shall be of 18-gauge stainless steel, and shall be welded to vertical leg frame. Shelves shall be double hemmed on all four edges for extra rigidity. Bottom shelf shall be positioned no closer than 20" (508 mm) from the floor surface, and top shelf shall be positioned no higher than 43" (1092 mm) from the floor surface. Push handles shall be of ergonomic vertical design and shall feature 8" range grip height. Unit shall have two each 5" (127 mm) diameter extra-load swivel casters with 1-1/4" (32 mm) wide non-marking Cushion-tread wheels and two each 8" diameter extra-load cushion-treadwheels mounted to a fixed axle. Swivel casters shall be plate type and shall be bolted to an 18-gauge 5" wide stainless steel cross member with a galvanized reinforcement. Unit shall have two each 6" (152 mm) vertical bumpers riveted to front legs.

Optional Accessories

- ☐ Extended perimeter bumper
- ☐ All 5" swivel casters
- ☐ Set of two 5" brake casters



Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446

info@eLakeside.com • www.eLakesideFoodservice.com

Milk Crate Transport Carts

Stainless Steel

Models 2444, 2446



Model 2446



Designed For Efficient Transport Of Milk Crates

- Shelves spaced to accommodate standard milk crates
- 500 lb load capacity
- All-stainless steel construction
- Durable tubular U-frame design
- Large 21" x 33" shelves feature dished edges to prevent drips
- Easy load/unload from both sides
- Two- and three-shelf versions available
- All-swivel 5" non-marking cushion-tread casters
- NSF listed



Model 2444

Spec. # _____

AIA # _____

Specifications

Unit is of stainless steel construction to accommodate standard milk crates. U-frame is 1" stainless steel round tubing forming integrated push handle on two ends. Shelves are 20-gauge stainless steel fastened to leg frame at shelf corners. Shelves are reinforced on long edges and have dished edges to prevent drips. Casters are 5" all-swivel with cushion-tread non-marking wheels. Casters are fastened to stainless steel reinforced crossmembers. Unit is NSF listed.

Model 2446:

Features 2" wide 14-gauge rail braces on one long side and both ends, fastened to the tubular frame below integrated push handle height.

Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakesideFoodservice.com


Models

2444

2446

Milk Crate Transport Carts


Stainless Steel




Dished Shelf Edges




Rail Brace On 3 Sides
(Model 6446)

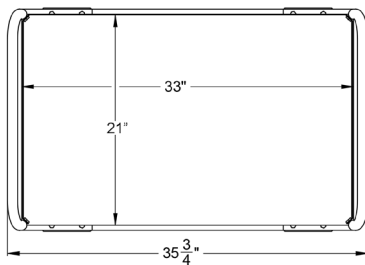


Plan View

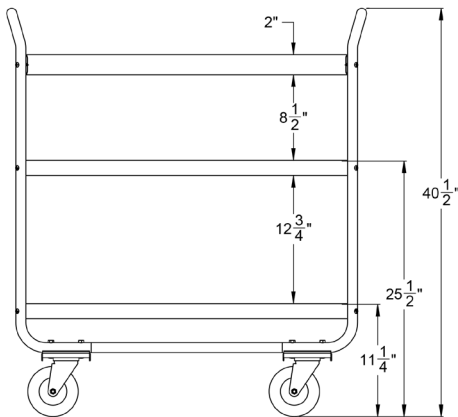


Model 2446

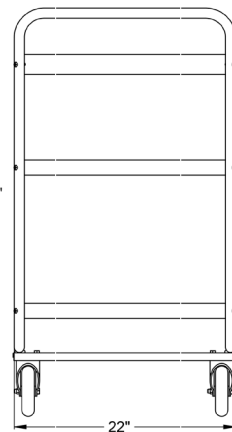

End View

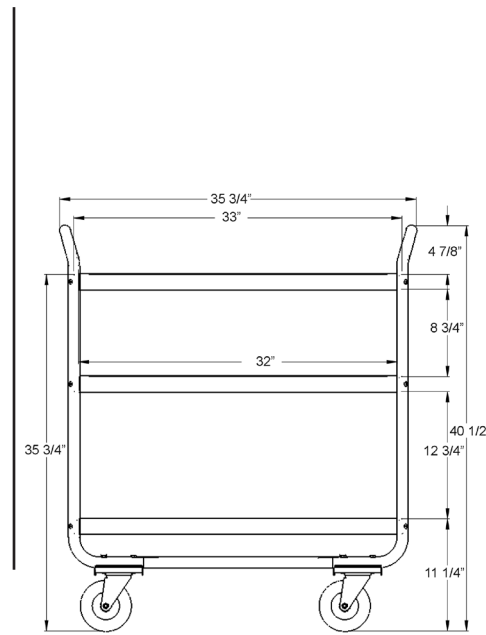

Model 2444

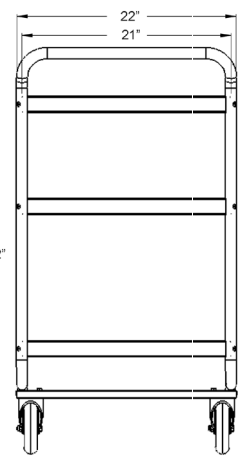

End View

AutoCAD drawings available through KCL CADalog.

Model Information

Model	Shelf Size	No. Of Shelves	Overall			Ship Weight Lbs. (kg)
			L	W	H	
2444	21" x 33" (533 X 838)	3	35 3/4" (908)	22" 559	40 1/2" 1029	81 (36.7)
2446	21" x 33" (533 X 838)	2	35 3/4" (908)	22" 559	40 1/2" 1029	75 (34.0)

Measurements in () denote metric millimeters, unless otherwise specified.



Lakeside Manufacturing, Inc.
4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446
info@eLakeside.com • www.eLakesideFoodservice.com

Deep Shelf Utility Carts

Heavy Duty 700 lb. Capacity - Stainless Steel

Models 527, 557, 727, 757

Spec. # _____

AIA # _____



Model 727



2 1/2" High Shelf Edges

Secure, Rugged Transport For Heavy Duty Loads

- 2 1/2" deep shelves hold items securely in place
- Angled "U" shaped steel frame provides extra strength needed for heavy duty jobs
- 700 lb. capacity is ideal for continuous moving of heavy loads over various floor surfaces.
- Rugged 18 gauge reinforced stainless steel shelves are easy to clean/sanitize
- Electronically welded for added strength
- Leg and handle bumpers protect walls and furniture
- NSF listed models available

Casters/Wheels

- 5" swivel and 8" rigid, cushion tread

Specifications:

Unit is of fully welded stainless steel construction. Legs and frame are U-frame design, eliminating the need for corner reinforcements. Leg/frame is .120 x 1" x 1" angle stainless steel. Shelves are 18-gauge stainless steel and are welded to vertical leg frames. Shelves are double hemmed on all four edges for extra rigidity. Both shelves have 2 1/2" upturned edges on all four sides to prevent items from rolling off. Unit has two each 5" diameter extra-load swivel casters with 1-1/4" wide non-marking polyurethane wheels, and two each 8" diameter extra-load wheels mounted to a fixed axle. Swivel casters are plate-mount type and are bolted to an 18-gauge 5" wide stainless steel cross member with a galvanized reinforcement. Unit features push handle made of 18-gauge wall 1" O.D. stainless steel tubing. Handle mounting brackets are welded to vertical leg frame. Unit has two each bumpers mounted to handle ends and two each 6" vertical bumpers riveted to front legs.

Lakeside Manufacturing, Inc.


4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakeside.com/foodservice


Models
527, 557
727, 757

Deep Shelf Utility Carts


Heavy Duty 700 lb. Capacity - Stainless Steel

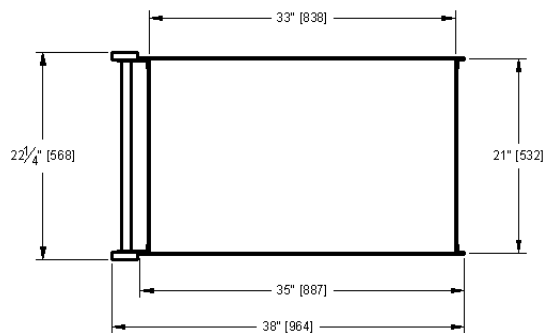

Model 727/527

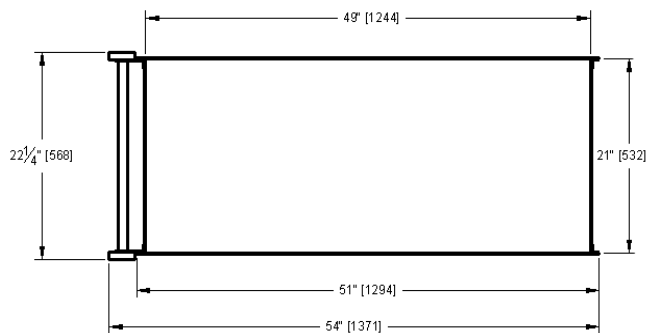

Model 757/557

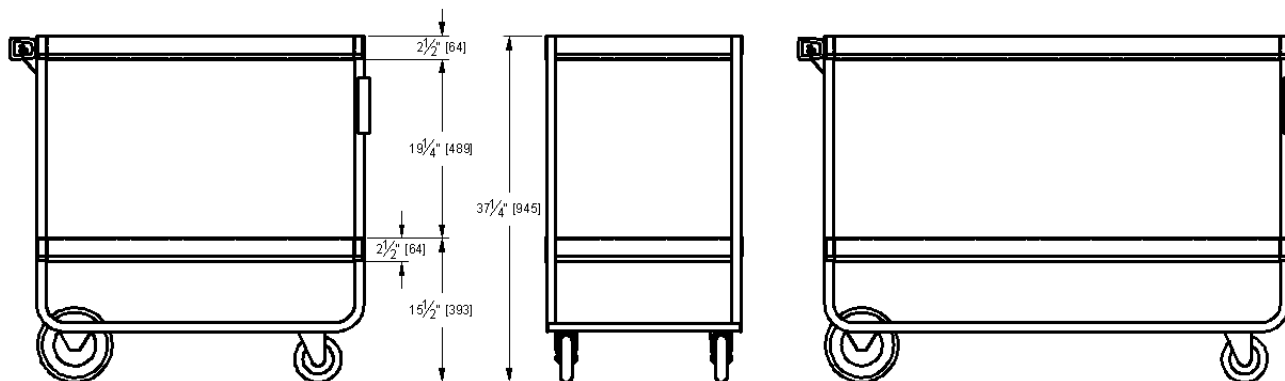

Product Information:

Model	NSF Model	Overall Size			Shelf Size		Shelf Clearance	Casters/ Wheels	Case Wt. Lbs. (Kg)
		W	L	H	W	L			
727	527	22 1/4\"	38\"	37 1/4\"	21\"	33\"	19 1/4\"	2 ea. Fixed 8\" 2 ea. Swivel 5\"	64 (29.0)
757	557	22 1/4\"	54\"	37 1/4\"	21\"	49\"	19 1/4\"	2 ea. Fixed 8\" 2 ea. Swivel 5\"	87 (39.4)

Dimensions in () denote metric millimeters, unless otherwise noted.

Option:

- ☐ All 5" swivel casters



Lakeside Manufacturing, Inc.
 4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
 800-558-8565 • 414-902-6400 • Fax 414-902-6446
 info@eLakeside.com • www.eLakeside.com/foodservice


ENCLOSED BUSSING CARTS

Heavy and Medium Duty

Heavy Duty

Ideal for:

- Continual use over a variety of floor surfaces.
- Traditional bussing or as a mobile set-up station.

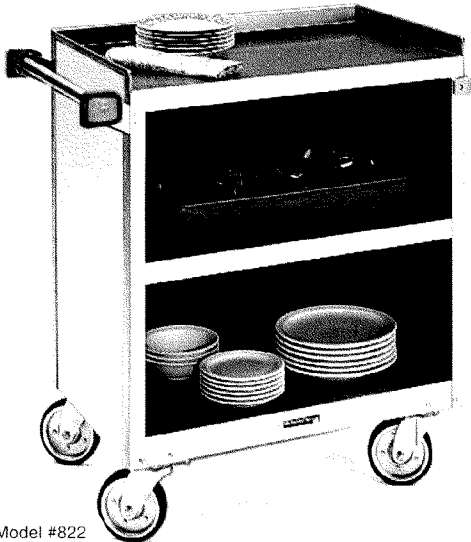

Model #822
Shown with optional almond finish.

Medium Duty

Ideal for:

- Moderate weight loads.
- All-purpose back-of-the-house duties.
- Constant use over various standard floor surfaces.

Standard Duty

Ideal for:

- Dining area bussing.
- Set-up, tray or soiled dish station.
- Continual transporting over even floor surfaces.

Enclosed Bussing Carts

Heavy Duty 650 lb. (300 kg) Capacity


- The dependability of stainless steel with a smartly styled vinyl laminate exterior finish.
 - Standard finish-walnut
 - New designer series finishes available, see page 12.
- With 3 sides enclosed, these carts are perfect for quiet and concealed table side service. Optional hinged doors available to completely conceal contents, see below.
- Stainless steel interior cleans and sanitizes easily. Vinyl exterior wipes down to its original luster.

Model	# of	Shelf Description		Overall Size		
		Size	Clearance	W	L	H
Stainless Steel Top Shelf - 3 Edges Up, 1 Down						
822	3	18" x 27" (457 x 686)	10 3/4" (273)	19 1/2" (495)	31 1/4" 794	34 1/2" (876)
844	3	21" x 35" (533 x 889)	12" (305)	22 1/2" (572)	39 5/16" 999	37" (940)

Lake-Glide Casters: Model 844, 5" (127) - 2 ea. swivel, 8" (203) - 2 ea. fixed.

Model 822, 5" (127) all swivel.

Optional accessories include:
detachable silverware and waste boxes,
see page 13 and hinged doors, see right.



Optional hinged doors, Black finish shown.

Enclosed Bussing Carts

Medium Duty 400 lb. (180 kg) Capacity

- Exciting Designer Series finishes available to complement your front-of-the-house decor.
 - Standard color is walnut. See page 12.
 - Optional hinged doors available to create a mobile cabinet, see above
- Quiet and concealed contents make it perfect for dining area bussing duties.
- Stainless steel interior cleans and sanitizes easily.

Model	# of	Shelf Description		Overall Size			Lake-Glide Casters	
		Size	Clearance	W	L	H	Type	Dia.
Wood Laminate Top Shelf - Flat								
626	3	18" x 27" (533 x 838)	12 ¹ / ₂ " (318)	18 ³ / ₄ " (476)	28 ¹ / ₄ " 718	32 ⁵ / ₈ " (829)	All swivel	4" (102)
646	3	21" x 35" (533 x 889)	13 ¹ / ₄ " (337)	22" (559)	36" 914	36 ⁵ / ₈ " (930)	All swivel	5" (127)
Stainless Steel Top Shelf - 3 Edges Up, 1 Down								
810	3	15 ¹ / ₂ " x 24" (394 x 610)	12 ¹ / ₂ " (318)	16 ⁷ / ₈ " (429)	28 ¹ / ₄ " 718	34 ¹ / ₂ " (876)	All swivel	4" (102)
815	4	15 ¹ / ₂ " x 24" (394 x 610)	9" (229)	16 ⁷ / ₈ " (429)	28 ¹ / ₄ " 718	37 ¹ / ₂ " (953)	All swivel	4" (102)
622	3	18" x 27" (457 x 686)	12 ¹ / ₄ " (311)	19" (483)	30 ³ / ₄ " 781	33 ⁷ / ₈ " (860)	All swivel	4" (102)
644	3	21" x 35" (533 x 889)	13 ¹ / ₈ " (333)	22 ¹ / ₂ " (572)	39 ¹ / ₄ " 997	37 ³ / ₈ " (949)	All swivel	5" (127)

Optional accessories: detachable silverware and waste boxes, see page 13.

Optional hinged doors, see above.

MEDIUM DUTY - 500 LB. (230 KG) CAPACITY

TUBULAR UTILITY CARTS | STAINLESS STEEL



Model #243

► What qualifies these carts for the 500 lb. Medium Duty rating:

- Tubular frame incorporates handles with U-frame construction for structural strength.
- 20 gauge stainless steel shelves have reinforced edges for heavy loads and load drops. Legs are 16 gauge stainless.
- Extra load casters with cushion tread non-marking wheels (Models 243 & 244).

► Easy-to-clean and sanitize, simply steam clean or wipe down.

► All models are NSF listed.

Model	# of	Shelf Description		Overall Size			Lake-Glide® Casters		Case Weight		Case Cube			
		Size	Clearance	W	L	H	Type	Dia.	Lbs.	(Kg)	Cu. ft.	(m³)		
All Stainless Steel														
210	2	15 ¹ / ₂ " x 24"	18 ³ / ₄ "	17 ¹ / ₂ "	27"	35 ³ / ₄ "	All swivel	4" (102)	31	(14)	10.9	(.42)	NA	
		(394 x 610)	(476)	(445	686	908)								
211	3	15 ¹ / ₂ " x 24"	9 ¹ / ₂ "	17 ¹ / ₂ "	27"	35 ³ / ₄ "	All swivel	4" (102)	36	(16.3)	10.9	(.42)	NA	
		(394 x 610)	(241)	(445	686	908)								
221	2	18" x 27"	18 ³ / ₄ "	20"	30"	35 ³ / ₄ "	All swivel	4" (102)	36	(16.3)	10.9	(.42)	NA	
		(457 x 686)	(476)	(508	762	908)								
222	3	18" x 27"	9 ¹ / ₂ "	20"	30"	35 ³ / ₄ "	All swivel	4" (102)	43	(19.5)	10.9	(.42)	NA	
		(457 x 686)	(241)	(508	762	908)								
243	2	21" x 33"	21 ¹ / ₂ "	22"	36"	40 ⁵ / ₈ "	All swivel	5" (127)	55	(25)	10.9	(.42)	NA	
		(533 x 838)	(546)	(559	914	1032)	No-Mark®, cushion tread							
244	3	21" x 33"	10 ³ / ₄ "	22"	36"	40 ⁵ / ₈ "	All swivel	5" (127)	66	(29.9)	10.9	(.42)	NA	
		(533 x 838)	(273)	(559	914	1032)	No-Mark, cushion tread							
Chrome Plated Legs/Frame														
472	2	15 ¹ / ₂ " x 24"	18 ³ / ₄ "	17 ¹ / ₂ "	27"	35 ³ / ₄ "	All swivel	4" (102)	32	(14.5)	27.4	(1.1)	NA	
		(394 x 610)	(476)	(445	686	908)								
473	3	15 ¹ / ₂ " x 24"	9 ¹ / ₂ "	17 ¹ / ₂ "	27"	35 ³ / ₄ "	All swivel	4" (102)	37	(16.8)	27.4	(1.1)	NA	
		(394 x 610)	(241)	(445	686	908)								
479	3	15 ¹ / ₂ " x 24"	9 ⁷ / ₈ "	17 ¹ / ₂ "	27"	35"	All swivel	4" (102)	43	(19.5)	3.6	(.1)	OK	
		(394 x 610)	(229)	(445	686	889)								
489	3	18" x 27"	9 ⁷ / ₈ "	20"	27"	35"	All swivel	4" (102)	50	(22.7)	4.5	(.1)	OK	
		(457 x 686)	(229)	(508	686	889)								
492	2	21" x 33"	21 ¹ / ₂ "	23"	36"	40 ¹ / ₈ "	All swivel	5" (127)	53	(24)	27.4	(1.1)	NA	
		(533 x 838)	(229)	(584	914	1019)								
493	3	21" x 33"	10 ³ / ₄ "	23"	36"	40 ¹ / ₈ "	All swivel	5" (127)	67	(30.4)	27.4	(1.1)	NA	
		(533 x 838)	(273)	(584	914	1019)								
499	3	21" x 33"	9 ⁷ / ₈ "	23"	36"	37"	All swivel	5" (127)	65	(29.5)	5.5	(.2)	OK	
		(533 x 838)	(229)	(584	914	940)								

OPTIONS | Detachable silverware & waste boxes with adapter bars (fits over tubular handle), see page 42.

Round corner bumpers set of four.

Lake-Glide Casters 4" (2 brake) for models 210, 211, 221, 222, 472, 473.

Lake-Glide Casters 5" (2 brake) for models 243, 244, 492, 493.

Sta-Clean® vinyl covers available.

 Denotes knocked down, shipped unassembled.

Freight Class: 125



Easy-Ship™ Utility Cart

Medium Duty- 500 Lb. Capacity

Lakeside's Largest Utility Cart That Ships Via UPS & FedEx Ground



Model 444ES

- Three 21" x 35" stainless steel shelves with 14" high-clearance middle shelf easily accommodates cases of product
- Durable welded stainless steel construction; easy to clean and sanitize
- Dual shelf spacing - taller 14" middle and 9" lower shelf
- Sound deadening panels under 20-gauge reinforced shelves restrict vibration and reduce noise
- Protective bumpers on legs and handle safeguard furnishings
- Based on popular Model 444 with a reduced overall height of 33½" that ships via UPS Ground and FedEx Ground

Specifications

Unit shall be of fully welded unitized construction with an overall carrying capacity of 500 pounds. Corner legs shall be of 16-gauge angle stainless steel. Shelves shall be of 20-gauge stainless steel with long shelf edges double hemmed for extra strength, and shall be electronically spot welded to upright legs at all points. Top shelf shall have 16-gauge angle reinforcements welded to long shelf edges. Unit shall have a stainless steel push handle welded to frame, and shall have corner bumpers mounted to front legs and ends of push handle. Welded assembly shall have triangular stainless steel reinforcing gussets welded to four bottom corners. Overall 33½" height allows for UPS/FedEx shipment. Unit shall have an independent galvanized steel dolly frame fastened to the bottom with 8 screws. Casters are 5" diameter all-swivel with non-marking cushion-tread wheels.


Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@elakeside.com • www.elakeside.com/foodservice

Easy-Ship™ Utility Cart

Medium Duty - 500 Lb Capacity

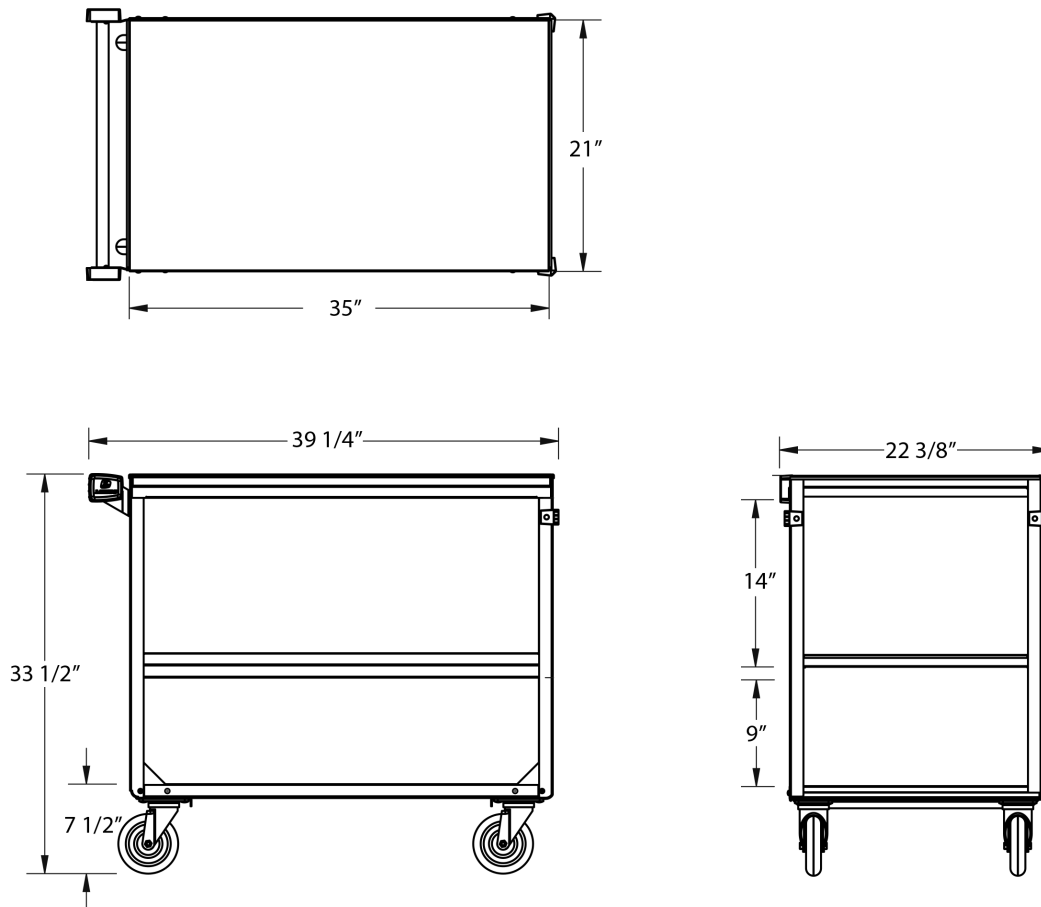

Model Information

Model	Shelves		Overall Size			Casters		Case Weight	
	Size	Clearance (C)	W	L	H	Type	Dia.	Lbs.	(kg)
444ES	21" x 35" (533 x 889)	14" (355) 9" (227)	22-3/8" (568)	39-1/4" (997)	33 1/2" (851)	All swivel	5" (127)	67	(30.3)

Measurements in () denote metric millimeters, unless otherwise specified.

Optional Accessory

- ☐ Set of two each brake casters



Lakeside Manufacturing, Inc.
4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446
info@elakeside.com • www.elakeside.com/foodservice

Stainless Steel Utility Carts

Tough Transport® - 1000 Lb Capacity

Models

938, 939, 943, 944, 947**949, 953, 954, 958, 959**

Model 954



Rugged Angled Stainless Steel U-Frame For Added Strength

- 1000 lb. (450 kg) capacity is ideal for continuous hauling of heavy loads over uneven floors and outdoor surfaces
- Shelves are 14-gauge stainless steel with reinforced edges front and back
- All joints are continuous welded
- Stainless steel construction resists staining and rusting
- Heavy-duty wide tread 8" fixed wheels and 5" swivel casters
- Easy to clean and sanitize
- NSF listed

Specifications

Unit is of fully welded stainless steel construction. Legs and frame are of U-frame design, eliminating the need for corner reinforcements. Shelves are 14-gauge stainless steel, and are continuously TIG welded to vertical leg frames. Shelves are reinforced front and back with 18-gauge angle welded to the shelf underside. Unit has two each 5" (127 mm) diameter extra-load swivel casters with 1-1/4" (32 mm) wide non-marking polyurethane wheels, and 2 each 8" diameter extra-load wheels mounted to a fixed axle. Swivel casters are plate mount type, bolted to an 18-gauge 5" wide stainless steel cross member with a galvanized reinforcement. Unit has a push handle made of 18 gauge 1" O.D stainless steel tubing. Handle mounting brackets are continuously TIG welded to vertical leg frame. Unit has two each bumpers mounted to handle ends and two each 6" (152 mm) bumpers riveted to front legs. Unit is NSF listed.

Optional Accessories

- ☐ Extended perimeter bumper
- ☐ All 5" swivel casters
- ☐ Set of 2 each 5" (127 mm) brake casters
- ☐ Ground and polished joint welds

Spec. # _____

A/A # _____

Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakeside.com/foodservice

Models


938, 939, 943

944, 947, 949

953, 954, 958, 959

Stainless Steel Utility Carts

Tough Transport® - 1000 Lb Capacity

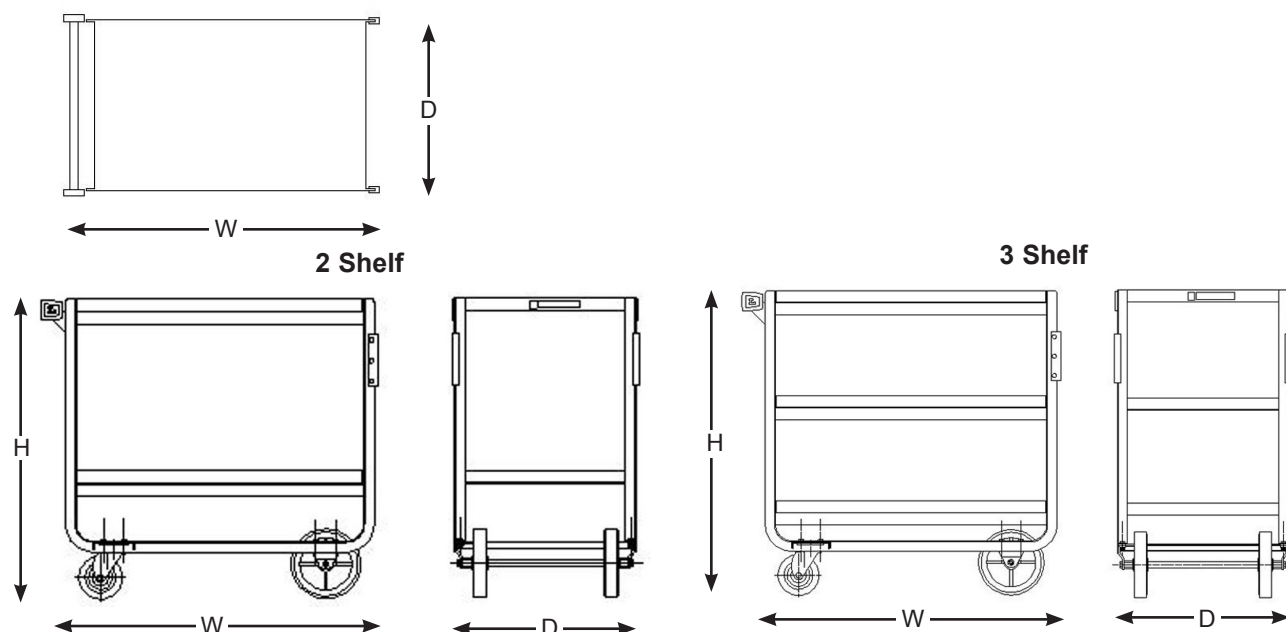

AutoCAD drawings available through KCL CADalog

Model Information

Model	Shelf Description			Overall Size			Case Weight	
	# of	Shelves	Clearance	W	D	H	Lbs.	(Kg)
938	2	18" x 27" (457 x 686)	19" (483)	33" (838)	19-3/4" (502)	34-1/4" (870)	66	(29.9)
939	3	18" x 27" (457 x 686)	10" (254)	33" (838)	19-3/4" (502)	34-1/4" (870)	80	(36.3)
943	2	21" x 33" (533 x 838)	21" (533)	39" (991)	22-3/4" (578)	37-3/8" (949)	88	(39.9)
944	3	21" x 33" (533 x 838)	11-3/8" (289)	39" (991)	22-3/4" (578)	37-3/8" (949)	106	(48.1)
947	2	24" x 36" (610 x 914)	21" (533)	42" (1067)	25-7/8" (657)	37-3/8" (949)	106	(48.1)
949	3	24" x 36" (610 x 914)	11-3/8" (289)	42" (1067)	25-7/8" (657)	37-3/8" (949)	130	(59)
953	2	24" x 42" (610 x 914)	21" (533)	48" (1219)	25-3/4" (654)	37-3/8" (949)	126	(57.1)
954	3	24" x 42" (610 x 914)	11-3/8" (289)	48" (1219)	25-3/4" (654)	37-3/8" (949)	152	(69)
958	2	21" x 49" (533 x 1245)	21" (533)	55" (1397)	22-3/4" (578)	37-3/8" (949)	123	(55.8)
959	3	21" x 49" (533 x 1245)	11-3/8" (289)	55" (1397)	22-3/4" (578)	37-3/8" (949)	150	(68)

Measurements in () denote metric millimeters, unless otherwise specified.



Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446

info@eLakeside.com • www.eLakeside.com/foodservice

Stainless Steel Utility Carts

Heavy Duty - 700 Lb Capacity



Model 744

Models

710, 711, 721, 722, 743, 744, 758, 759
510, 511, 521, 522, 543, 544, 558, 559

“U” Shaped Angled Frame Provides The Strength Needed For Heavy-duty Jobs

- 700 lb. (300 kg) capacity is ideal for continuous moving of heavy loads over various standard floor surfaces
- Rugged 18-gauge reinforced stainless steel shelves are stain and rust resistant. Electronically welded for added strength.
- Easy to clean and sanitize, simply wipe down or steam clean
- Leg and handle bumpers protect walls and furniture
- NSF listed models available

Specifications

Unit shall be of fully welded stainless steel construction. Legs and frame shall be of U-frame design, eliminating the need for corner reinforcements. Leg/frame shall be .120 x 1" x 1" angle stainless steel. Shelves shall be of 18-gauge stainless steel and shall be welded to vertical leg frames. Shelves shall be double hemmed on all four edges for extra rigidity. Unit shall have two each 5" (127 mm) diameter extra-load swivel casters with 1-1/4" (32 mm) wide non-marking polyurethane wheels, and two each 8" diameter extra-load wheels mounted to a fixed axle. Swivel casters shall be plate type and shall be bolted to an 18-gauge 5" (127 mm) wide stainless steel cross member with a galvanized reinforcement. Unit shall have push handle made of 18 gauge 1" O.D. stainless steel tubing. Handle mounting brackets shall be welded to vertical leg frame. Unit shall have two each bumpers mounted to handle ends and two each 6" (152 mm) vertical bumpers riveted to front legs.


Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakeside.com/foodservice

Stainless Steel Utility Carts

Heavy Duty - 700 Lb Capacity

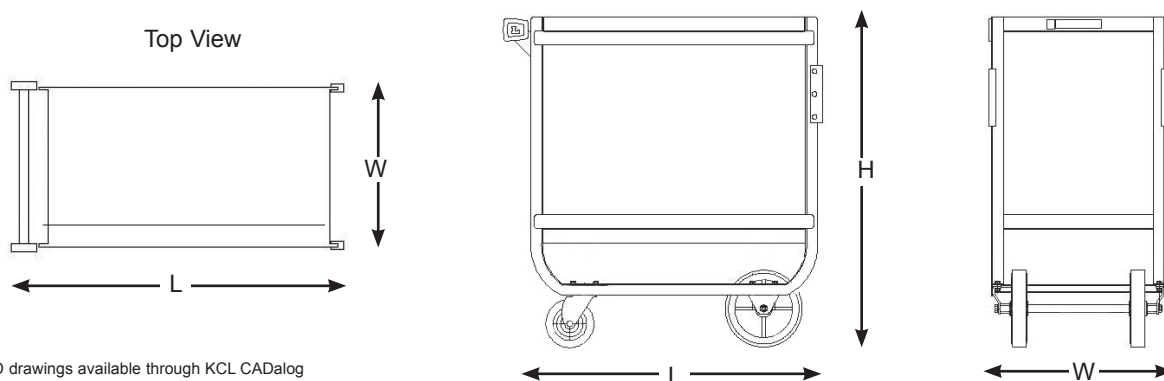

AutoCAD drawings available through KCL CADalog

Model Information

Model	NSF Model	# of	Shelf Description		Overall Size			Case Weight	
			Size	Clearance	L	W	H	lbs.	(kg.)
710	510	2	15-1/2" x 24" (394 x 610)	19" (483)	30" (762)	16-1/4" (413)	34-1/4" (870)	49	(22.2)
711	511	3	15-1/2" x 24" (394 x 610)	10" (254)	30" (762)	16-1/4" (413)	34-1/4" (870)	57	(25.9)
721	521	2	18" x 27" (457 x 686)	19" (483)	32-5/8" (829)	19-3/8" (492)	34-1/2" (876)	53	(24)
722	522	3	18" x 27" (457 x 686)	10" (254)	32-5/8" (829)	19-3/8" (492)	34-1/2" (876)	63	(28.6)
743	543	2	21" x 33" (533 x 838)	21" (533)	38-5/8" (981)	22-3/8" (568)	37-1/8" (943)	64	(29)
744	544	3	21" x 33" (533 x 838)	11-3/8" (289)	38-5/8" (981)	22-3/8" (568)	37-1/8" (943)	78	(35.4)
758	558	2	21" x 49" (533 x 1245)	21" (533)	54-5/8" (1387)	22-3/8" (568)	37-1/8" (943)	87	(39.5)
759	559	3	21" x 49" (533 x 1245)	11-3/8" (289)	54-5/8" (1387)	22-3/8" (568)	37-1/8" (943)	108	(49)

Measurements in () denote metric millimeters, unless otherwise specified.

Optional Accessories

- ☐ Extended perimeter bumper
- ☐ All 5" swivel casters
- ☐ Set of 2 ea. 5" brake casters



Lakeside Manufacturing, Inc.
4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446
info@eLakeside.com • www.eLakeside.com/foodservice

Stainless Steel Utility Carts

Medium Duty - 500 Lb. Capacity

Models 411, 422, 444, 444ES, 459

Ideal For All-Purpose Back-Of-The-House Tasks

- Durable, unitized electronically welded angle leg frame
- 20-gauge stainless steel reinforced shelves
- Protective bumpers on legs and handle protect furnishings
- Sound deadening panels under shelves reduce vibrations and noise
- 500 lb. (230 kg.) load capacity
- Model 444ES is based on Model 444 with a reduced overall height of 32-1/2", making the 444ES Easy-Ship™ eligible via UPS Ground and FedEx Ground



Model 422



Model 444ES

Specifications:

Unit shall be of fully welded unitized construction with an overall carrying capacity of 500 pounds. Corner legs shall be of 16-gauge angle stainless steel. Shelves shall be of 20-gauge stainless steel with long shelf edges double hemmed for extra strength, and shall be electronically spot welded to upright legs at all points. Unit shall have a stainless steel push handle welded to frame, and shall have corner bumpers mounted to front legs and ends of push handle. Unit shall have an independent galvanized steel dolly frame fastened to the bottom with 8 screws. Four each 4" swivel casters shall be mounted to the dolly frame.

Models 444, 444ES and 459 Only

Unit shall have 4 each 5" diameter swivel casters with non-marking polyurethane wheels. Welded assembly shall have triangular stainless steel reinforcing gussets welded to four bottom corners. Top shelf shall have 16-gauge angle reinforcements welded to long shelf edges.

Spec. # _____

AIA # _____

Lakeside Manufacturing, Inc.



4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakeside.com/foodservice

Models
411, 422
444, 444ES
459

Stainless Steel Utility Carts

Medium Duty - 500 Lb. Capacity

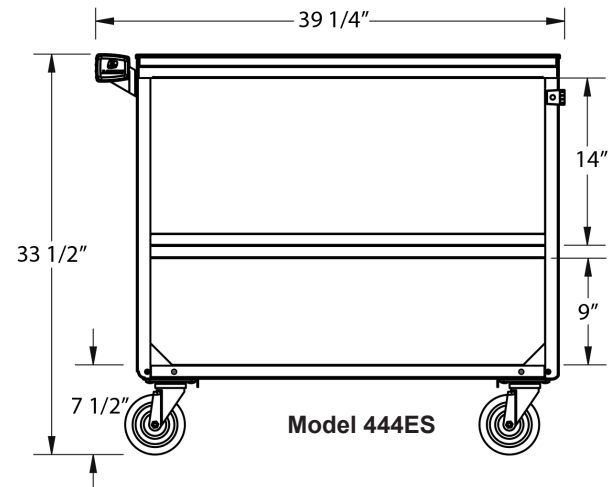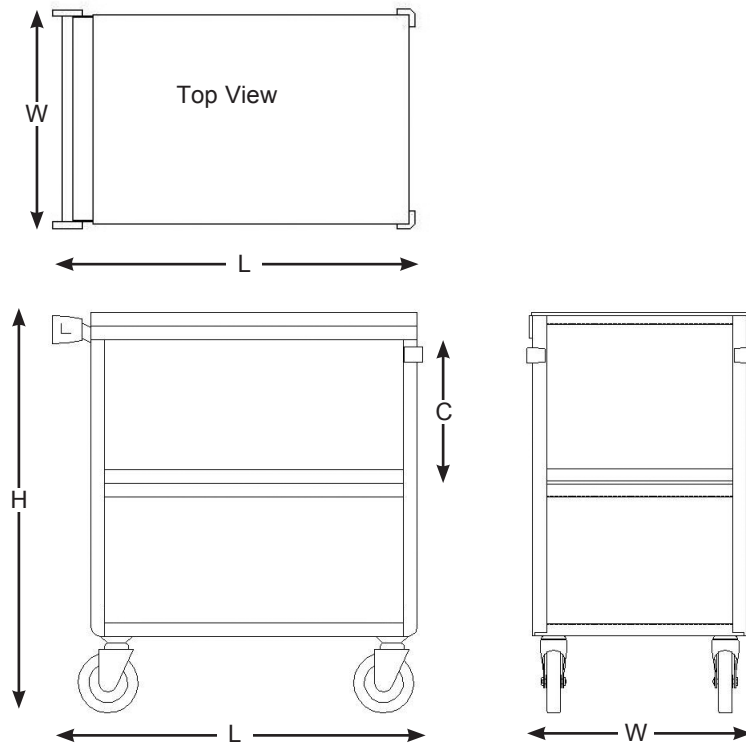

Optional Accessories

(411, 422, 444 and 459)

- Perimeter shelf mounted strip bumper
- Cushion tread wheels
- Clear vinyl slipover box type cover

(models 444, and 459)

- Extended perimeter bumper
- 8" swivel casters

(all models)

- Set of two each brake casters

Model Information

Model	UPS	Shelves		Overall Size			Casters		Case Weight	
		Size	Clearance (C)	W	L	H	Type	Dia.	Lbs.	(kg)
411	Yes	15-1/2" x 24" (394 x 610)	11-1/2" (302)	16-3/4" (425)	27-5/8" (702)	32" (813)	All swivel	4" (102)	39	(17.7)
422	Yes	18" x 27" (457 x 686)	11-1/2" (302)	19" (483)	31" (787)	32" (813)	All swivel	4" (102)	42	(19.1)
444	No	21" x 35" (533 x 889)	13-1/8" (333)	22-3/8" (568)	39-1/4" (997)	37-1/4" (946)	All swivel	5" (127)	68	(30.8)
444ES	Yes	21" x 35" (533 x 889)	14" (355) 9" (227)	22-3/8" (568)	39-1/4" (997)	33 1/2" (851)	All swivel	5" (127)	67	(30.3)
459	No	21" x 49" (533 x 1245)	13-1/8" (333)	22-3/8" (568)	54-1/8" (1374)	37-1/4" (946)	2 swivel 2 fixed	5" (127)	88	(39.9)

Measurements in () denote metric millimeters, unless otherwise specified.



Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446

info@eLakeside.com • www.elakeside.com/foodservice

Push-Pull Utility Carts

Heavy-Duty Utility Carts - 700 Lb Capacity With Trailing Cart Capability

Models 163421, 170867, 169168

The Flexibility of Pushing or Pulling with the Ability to Tow Multiple Utility Carts



Model 163421

PUSH-PULL HANDLE™



Shown with Model 170867
Trailing Cart in towing operation.*

Benefits

- Push or pull, and optionally tow, for ultimate flexibility
- Save labor and make fewer trips by towing multiple carts using optional on-board hitch bar system
- Stay out in front while pulling for full visibility of the path ahead and safe navigation of crowded spaces
- Take full strides while pulling with the Push-Pull Handle and reduce ankle contact

Features

- Push-Pull Handle with integrated latch lowers for pulling and towing multiple carts
- Hinged handle locks securely in upright position for conventional pushing action
- Links with up to two Model 170867 for easy towing operation
- Optional on-board stowable drawbar system includes hitch receiver bushing to reduce friction and component wear, plus convenient on-board storage for the optional drawbar when not in use
- All-welded stainless steel construction is easy to clean and sanitize
- Durable 700 lb. (300 kg) capacity is ideal for the continuous moving of heavy loads over most standard floor surfaces

Casters

- 5" cushion tread, 2 ea. fixed, 2 ea. swivel

* Optional #169168 Stowable Drawbar with on-board storage required to connect multiple Push-Pull carts.

Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219, USA
800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakeside.com/foodservice

Models
163421
169168
170867

Push-Pull Utility Carts

Heavy-Duty Utility Carts - 700 Lb Capacity With Trailing Cart Capability

Specifications:

Lakeside model 163421 is of welded stainless steel U-frame construction. Shelves are 18-gauge and U-frame is 1" x 1" x 1/8" angle stainless steel. Full-height tubular handle is hinged at the bottom to swing out for pulling action, and locks in upright position for pushing action. Optional on-board hitch bar system includes receiver bushing and connects frame cross members to allow for towing of multiple carts. Casters are 5" (2 ea. fixed and 2 ea. swivel with brake) non-marking with cushion tread, fastened to reinforced 18-gauge stainless steel cross members for extra strength.

Model 170867 Trailing Cart, same as Model 163421 but with fixed push handle with bumpers.


Model 169168 Stowable Drawbar is of 1/8" angle welded stainless steel construction with round male pin on one end and angle male pin on the other end. Bar is designed to be stored on bottom crossmember of cart.



Push-Pull Handle¹ allows for safe pushing/pulling operation.




Hinged handle locks securely in upright position.

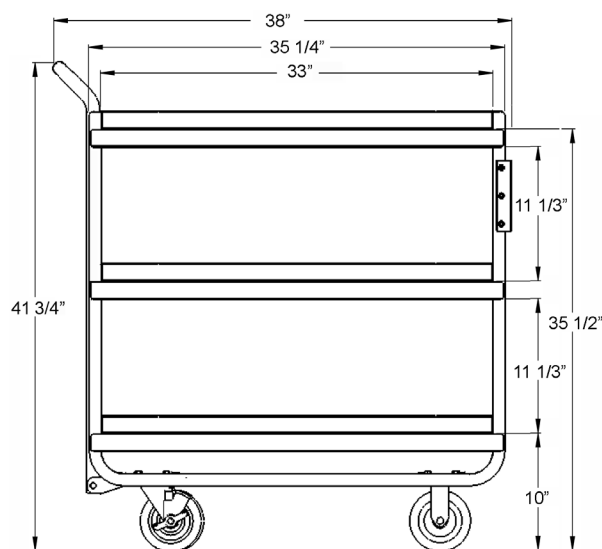

¹ Patent Pending

Model 163421

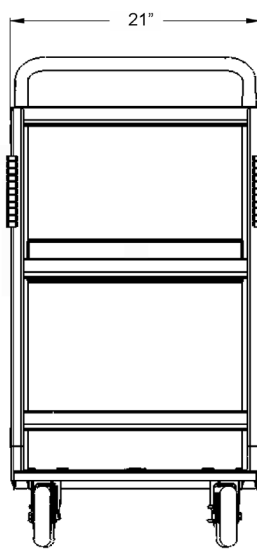

Optional Stowable Drawbar



Model Information

Model	Description	Shelf Size	Castors/ Wheels	Overall Size W x L x H*	Ship Wt.
163421	Push-Pull Utility Cart	21" x 33"	2 Ea. 5" Fixed/Swivel	22" x 38" x 41 3/4"	125 lb.
170867	Push-Pull Trailing Utility Cart	21" x 33"	2 Ea. 5" Fixed/Swivel	22 3/8" x 38 5/8" x 37"	81 lb.
169168	Push-Pull On-Board Hitch Bar	---	---	13/8" x 14 1/2" x 2 1/2"	2 lb.

* With handle in locked 'Push' position

LAKESIDE
Ingenuity On Wheels™

Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219, USA
 800-558-8565 • 414-902-6400 • Fax 414-902-6446
 info@eLakeside.com • www.eLakeside.com/foodservice

Electric Heavy Duty Utility Cart

Power Assist Stainless Steel

Model 173670

Ideal For Hauling Heavy Loads Over Long Distances And Up And Down Inclines

Benefits

- Transport more supplies and equipment with less staff
- Easily maneuver up to 700 lbs with a single operator
- Labor savings and efficiency – one person and one cart can move more
- Worker safety – reduces operator fatigue and strain

Features

- Battery-powered integrated hub motor wheels provide safe, easy power assist
- Dual hot-swappable rechargeable batteries provide two hours of continuous use
- End-mounted motion control panel with battery level meter
- Forward and reverse controls allow operator to push or pull cart
- Emergency stop feature to ensure operator safety and prevent injuries
- All-welded stainless steel heavy-duty construction is easy to clean and sanitize

Casters

- Two all-swivel 6" wide-tread non-marking with brake, and two 6" hub motor powered rigid wheels

**Model 173670****Speed/Direction Thumb Control****Hot Swappable Batteries****Emergency Stop Button****Integrated Hub Motor Wheels****24V Lithium-Ion Batteries****Battery Level Meter**

Spec. # _____

AIA # _____

Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakeside.com/foodservice


Electric Heavy Duty Utility Cart

Model
173670

Power Assist Stainless Steel

Specifications:

Lakeside model 173670 is of welded stainless steel U-frame construction. Shelves are 18-gauge and U-frame is 1" x 1" x 1/8" angle stainless steel. The battery-operated power system features 2 ea. power assist wheels. Wheel motion is controlled by an end-mounted thumb action control panel with emergency stop button and battery level meter. Motion system is powered by dual hot-swappable and rechargeable 24V lithium-ion batteries providing two hours of continuous use. Casters are two each non-marking 6" wide tread swivel casters with brake, and 2 each front end mounted power hub casters.

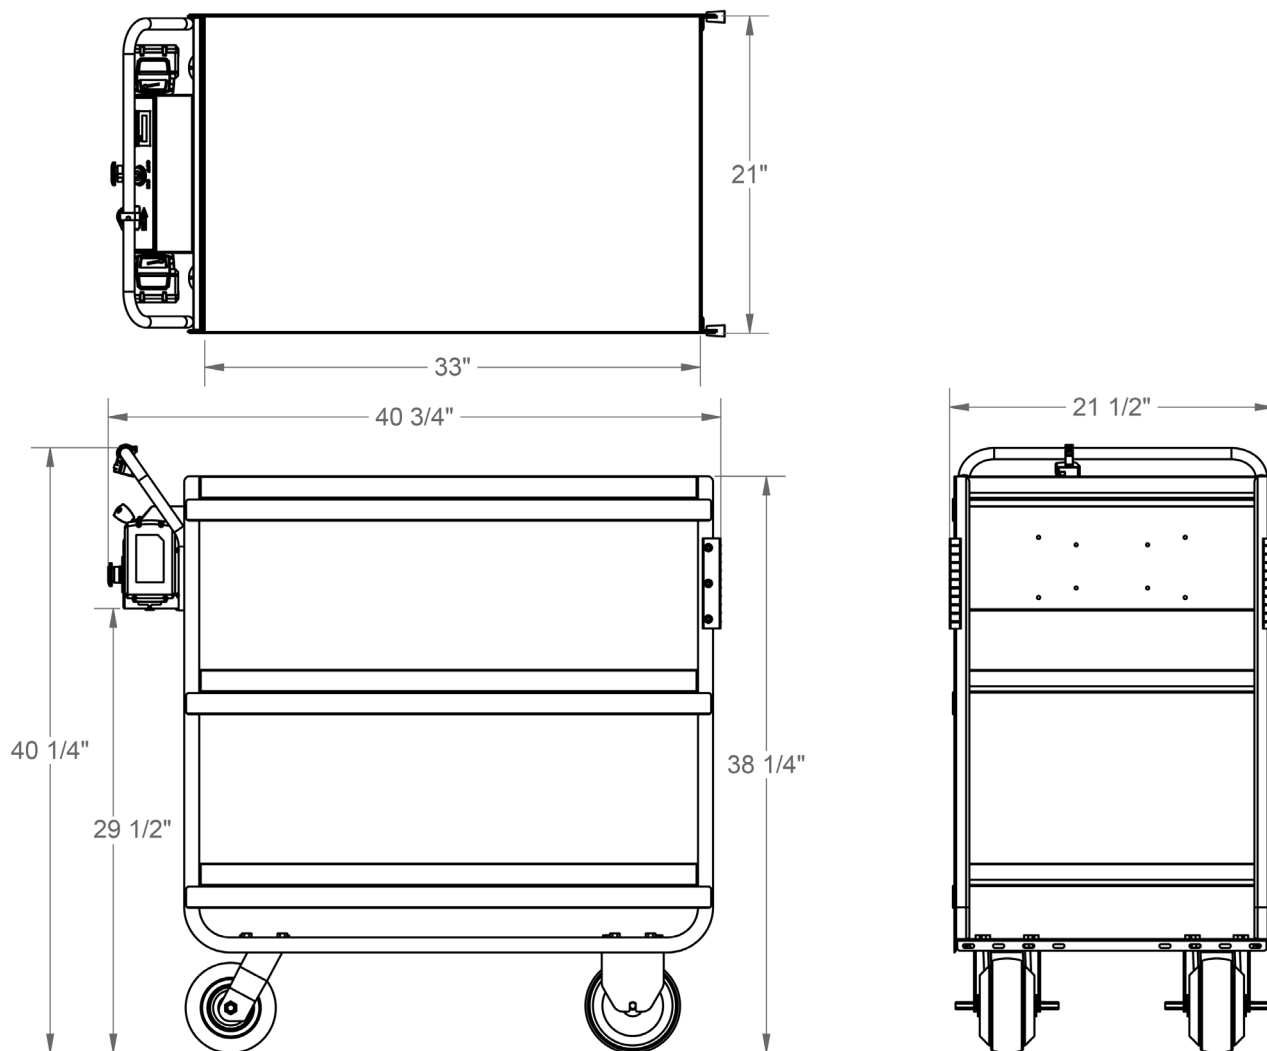

Model Information

Model	Shelf Description			Overall Size			Unit Weight	Case Weight
	# of	Size	Clearance	L	W	H		
173670	3	21" x 33" (533 x 838)	11-3/8" (289)	40-3/4" (1035)	21-1/2" (546)	40-1/4" (1022)	100 (45.4 kg)	130 (58 kg)

Measurements in () denote metric millimeters, unless otherwise specified.



Lakeside Manufacturing, Inc.
4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446
info@eLakeside.com • www.eLakeside.com/foodservice

1 STANDARD DUTY
 300 LBS | 135 KG

TRADITIONAL UTILITY CARTS | STAINLESS STEEL

Lakeside's classic cart satisfies all of your basic needs.



NEW!

All-welded angle leg design provides durability

Reinforced, hemmed front adds strength where the cart is most vulnerable to stress

Stainless steel is easy to clean and sanitize

Bumpers on legs and handles help protect walls and furniture

Sound deadening material under shelves restricts vibration and reduces noise

FACTORY INSTALLED OPTIONS (PAGE 55):

- 4" (102) 2 ea. swivel w/brake casters
- Perimeter strip bumper
- Lake-Glide casters and wheels

ACCESSORIES (PAGE 56):

- Detachable silverware boxes
- Waste boxes



Freight Class: **125**

Ships in: **2** days or less!

Model #311

Model	# of Shelves	Shelf Size	Shelf Clearance	Overall Size			Caster Type	Caster Dia.	Case Weight Lbs. (Kg)	Case Cube Cu. ft. (m³)	FedEx
				W	L	H					
311	3	15-1/2" x 24" (394 x 610)	11-3/4" (298)	16-1/4" (413)	27-1/2" (699)	32-1/8" (816)	All swivel	3-1/2" (89)	29 (13.2)	10.9 (.42)	OK
<i>New</i> 311A	3	15-1/2" x 24" (394 x 610)	11-3/4" (298)	16-1/4" (413)	27-1/2" (699)	32-1/8" (816)	All swivel	3-1/2" (89)	29 (13.2)	10.9 (.42)	OK
322	3	18" x 27" (457 x 686)	12-1/4" (311)	18-3/8" (467)	30-3/4" (781)	33" (838)	All swivel	3-1/2" (89)	32 (14.5)	16.3 (.63)	NA
<i>New</i> 322A	3	18" x 27" (457 x 686)	12-1/4" (311)	18-3/8" (467)	30-3/4" (781)	33" (838)	All swivel	3-1/2" (89)	32 (14.5)	16.3 (.63)	NA
316*	3	15-1/2" x 24" (394 x 610)	9-1/4" (235)	16-1/4" (413)	27-1/2" (699)	33-3/8" (848)	All swivel	3-1/2" (89)	33 (14.9)	10.9 (.42)	OK

Measurements in () denote metric millimeters, unless otherwise specified. *Includes Guard Rail on open edge of top and middle shelf, all 4 sides of bottom shelf.

Models with "A" suffix color-coded with purple to promote allergen awareness.

Electric

Utility Cart - Motorized

Model 163422

Ideal For Hauling Heavy Loads Over Long Distances And Up And Down Inclines

Benefits

- Transport more supplies and equipment with less staff
- Easily maneuver up to 1000 lbs with a single operator
- Labor savings and efficiency – one person and one cart can move more
- Worker safety – reduces operator fatigue and strain

Features

- Motorized assisted cart has a self-contained electric motor transaxle
- Simple handle controls with two speed options
- Forward and reverse controls allow operator to push or pull cart
- Emergency stop feature to ensure operator safety and prevent injuries
- Power cord holder for easy access to charge and neat tuck-away while in use
- Engagement override lever allows for non-motorized use
- Quick charge battery system
- All-welded stainless steel heavy-duty construction is easy to clean and sanitize

Wheels/Casters

- Non-marking flat-free drive wheels, 2 ea. 8" swivel casters with brake



Model 163422



Battery Carriage



Transaxle Drive Motor



Motion Control



All-Welded Construction

Spec. # _____

AIA # _____

Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakeside.com/foodservice


Model
163422

Electric

Utility Cart - Motorized

Specifications:

Lakeside model 163422 is of welded stainless steel U-frame construction. Shelves are 14-gauge and U-frame is 1 1/4" x 1 1/4" x 1/8" angle stainless steel. The battery-operated power system features a 24-Volt DC transaxle drive and precision forward and reverse controls with auto-braking, and includes dual 35 Ah, AGM deep cycle batteries. Motorized cart has a speed range of 0.1 to 1.5 MPH at the low setting, and 0.1 to 3.0 MPH at the high setting. Battery charging system is 120 VAC, 1-phase, 47-63 Hz., with coiled cord and plug. Safety features include a 68 db. horn, emergency stop, keyed power-on lock, holding brake to keep unit from rolling down inclines when stopped, and automatic stop when operator releases control. A power axle release allows non-motorized use. Battery carriage features static release floor belt. Power wheels are 8" diameter flat-free non-marking with grip tread, and 8" casters are swivel with non-marking cushion-tread wheels.

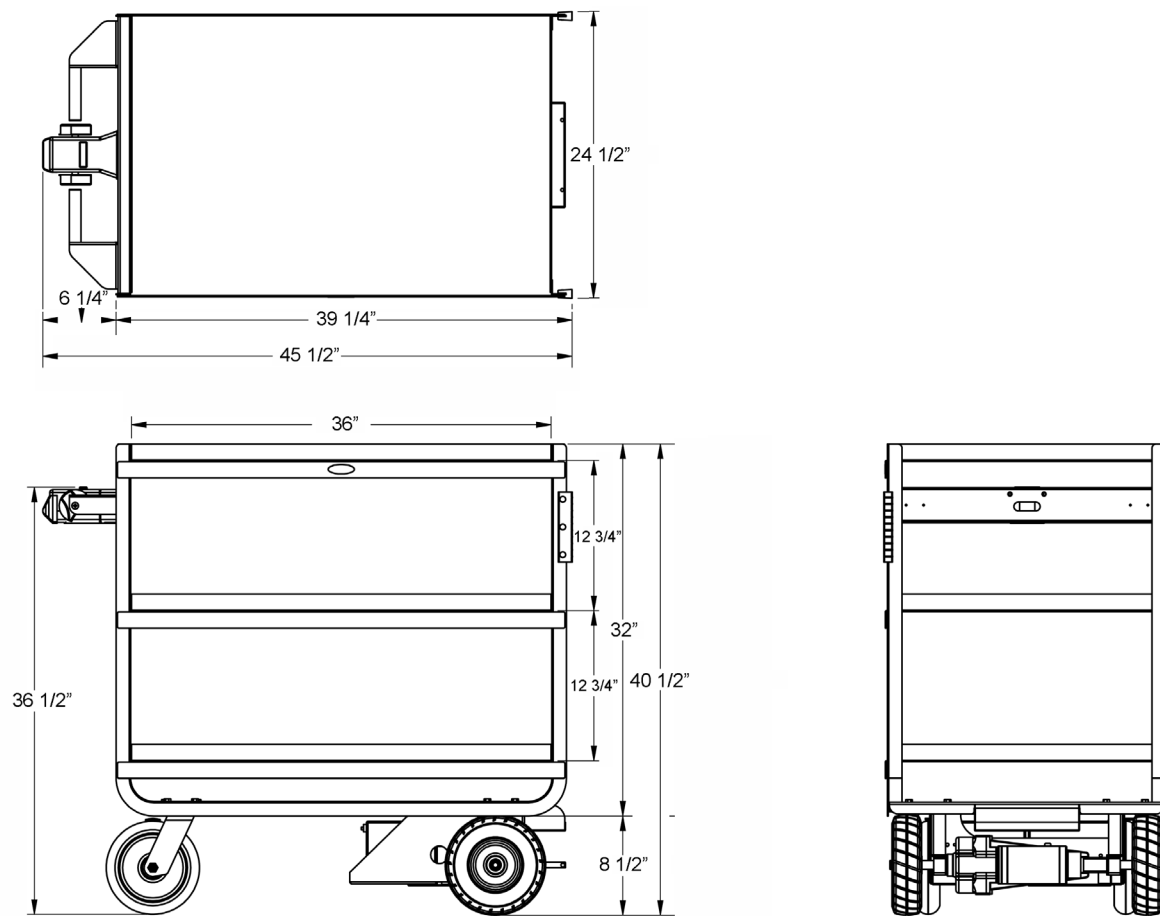

Ship Weight - 252 Lb.



Lakeside Manufacturing, Inc.
4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446
info@eLakeside.com • www.eLakeside.com/foodservice

Multi-Terrain Mobility™

Heavy-Duty Transport Cart - Stainless Steel

**Models 155046
155047**



Model 155046



Handle in closed position for pushing motion



Handle in open position for pulling motion

Rugged Design For Moving The Heaviest Cargo Loads Across Rough Terrains And Long Distances.

Features

- Patent-pending handle design for push/pull maneuverability
- Durable U-frame welded construction
- Rugged pneumatic casters, 2 rigid, 2 swivel with brake
- Ergonomic handle height for maximum leverage
- Dual top handles
- 700 lb. total load capacity
- Corner top bumpers

Benefits

- Unique handle design allows for maximum leverage with heavy loads over all types of surfaces
- Designed for the roughest terrains and long trips
- Dual-handle design allows two-person guided transport for challenging outdoor use
- Large wheels roll smoothly over thresholds and uneven surfaces
- Sturdy shelves with edges on 3 sides hold cargo securely while providing easy loading/unloading

Specifications

Unit is of welded stainless steel U-frame construction with three 18-gauge shelves. Shelves have 1" turned up edge on three sides. Leg frames are 1/8" angle stainless steel. Bottom shelf has guard rail on ends. One end of unit has patent-pending bottom hinged handle that swings from frame to allow for safe pulling by operator, or two-person operation using conventional push handle on opposite end. Movable handle locks into upright position in frame for conventional pushing action. Both handles have bumpers at corners. Casters are 6" or 8" pneumatic, two ea. swivel with brake and two ea. rigid, with 2" wide ribbed tread. Casters are plate-mounted to reinforced stainless steel crossmembers.

Spec. # _____

A/A # _____

Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakesideFoodservice.com


Models

155046

155047

Multi-Terrain Mobility™

Heavy-Duty Transport Cart - Stainless Steel

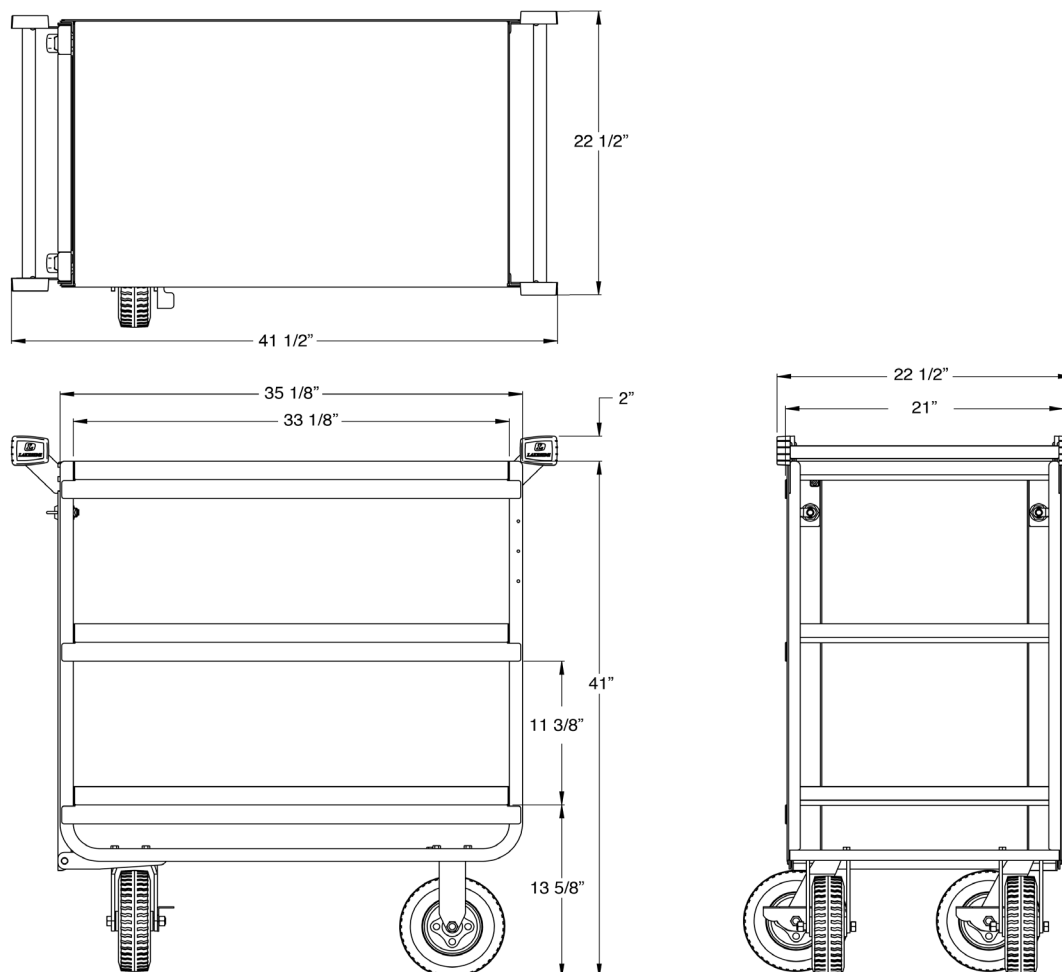

Model 155047

Model Information:

Model	Overall Size			Casters		Ship Wt. Lbs. (Kg)
	L	W	H	Type	Dia.	
155046	41½"	22½"	41¾"	2 ea. Swivel w/Brake	6"	94
	(1054)	572	1060)	2 ea. Rigid	(152)	(42.6)
155047	41½"	22½"	43"	2 ea. Swivel w/Brake	8"	96
	(1054)	572	1092)	2 ea. Rigid	(203)	(43.5)

Dimensions in () denote metric milimeters, unless otherwise noted.

Made In



Lakeside Manufacturing, Inc.
4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446
info@eLakeside.com • www.eLakesideFoodservice.com

Stainless Steel Utility Carts

Extreme Duty® - 1500 Lb Capacity

Models 8820, 8840


Model 8840



Model 8820

Designed To Handle The Toughest Applications

- Square tubing reinforcement under shelves and square tube frame provides model 8840's superior strength
- "U" shaped body design with angled stainless steel frame gives model 8820 the Extreme Duty classification
- All stainless steel construction with full bead welding
- Resists staining and rusting, cleans and sanitizes easily
- 1500 lb. (680 kg.) capacity is ideal for 24-hour operations to transport heavy loads over various indoor or outdoor surfaces
- Model 8820 is NSF listed.

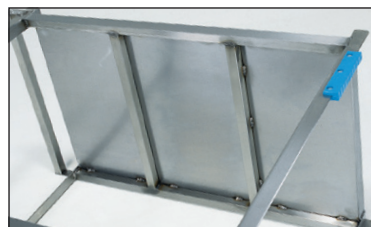

Shelves reinforced with square tubing.

Specifications

Model 8840: Unit is of fully welded stainless steel construction. Legs and frame are of inverted U-frame design, constructed of .065 wall x 1" x 1" stainless steel square tubing. Inverted U-frame forms integrated push handles on both ends. Shelves are of 14-gauge stainless steel, and are TIG welded to vertical leg frames. Shelves are reinforced on four sides with .065 wall x 1" x 1" stainless steel square tubing. Shelves also feature three additional reinforcements of .065 wall 1" x 1" stainless steel square tubing running the width of the shelves. All shelf reinforcements are TIG welded to underside of shelves. Unit has two each 8" diameter extra-load swivel and two each 8" (203 mm) diameter extra-load fixed casters with 1-1/4" (32 mm) wide non-marking polyurethane wheels. Casters are plate mount type and mounting plate is welded to lower frame.

*Specifications continued on back.***Lakeside Manufacturing, Inc.**

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.


800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.elakeside.com/foodservice

Stainless Steel Utility Carts

Extreme Duty®

Specifications (continued)

Model 8820: Unit is of fully welded stainless steel construction. Legs and frame are of U-frame design, eliminating the need for corner reinforcements. Leg/frame is constructed of .120 x 1" x 1" angle stainless steel. Shelves are 14-gauge stainless steel and are continuously TIG welded to vertical leg frames. Shelves are reinforced front and back with 18-gauge angle welded to the shelf underside. Shelves also feature two additional reinforcements of .065 wall 1" x 1" stainless steel square tubing running the width of the shelves. All shelf reinforcements are TIG welded to underside of shelves. Unit has two each 5" (127 mm) diameter extra-load swivel and two each 5" (127 mm) extra-load fixed casters with 1-1/4" wide non-marking polyurethane wheels. Casters are plate mount type and are fastened to an 18-gauge 5" (127mm) wide stainless steel cross member with a galvanized steel reinforcement. Unit has push handle made of 18 gauge wall 1" O.D. stainless steel tubing. Handle mounting brackets are continuously TIG welded to vertical leg frame. Unit has two each bumpers mounted to handle ends and two each 6" (203 mm) vertical bumpers riveted to front legs. Unit is NSF listed.

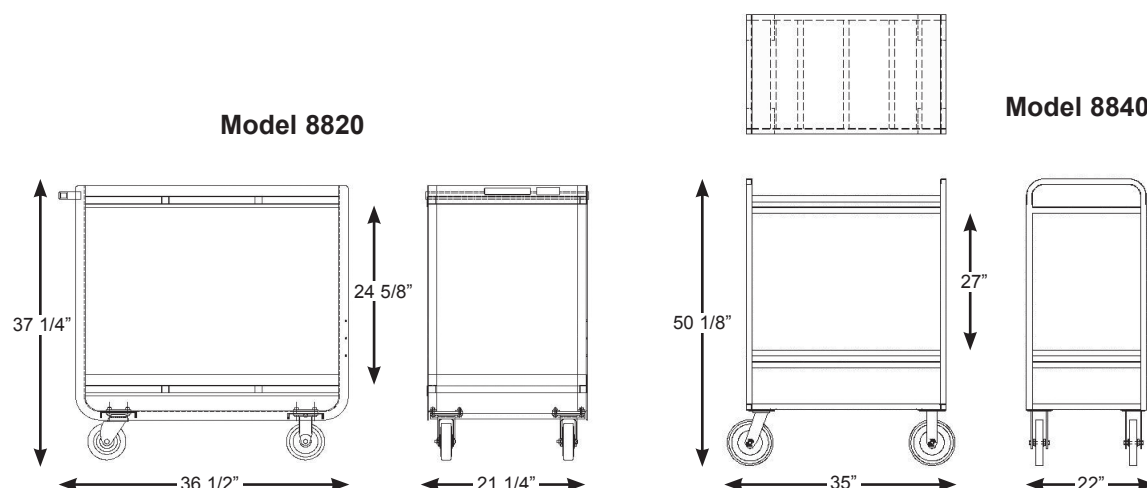

AutoCAD drawings available through KCL CADalog

Model Information

Model	NSF Listed	Shelf Description			Overall Size			Case Weight	
		# of	Size	Clearance	L	W	H	lb.	(kg.)
8820	✓	2	21" x 33" (533 x 838)	24-5/8" (625)	36-1/2" (927)	21-1/4" (540)	37-1/4" (946)	98	(44)
8840	✗	2	21" x 33" (533 x 838)	27" (686)	35" (889)	22" (559)	50-1/8" (1273)	117	(53)

Measurements in () denote metric millimeters, unless otherwise specified.

Optional Accessories (Model 8820)

- ☐ All 5" (127 mm) swivel casters
- ☐ Extended perimeter bumper
- ☐ Security packages



Lakeside Manufacturing, Inc.
4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.
800-558-8565 • 414-902-6400 • Fax 414-902-6446
info@eLakeside.com • www.elakeside.com/foodservice