

**6-Person Hands-Free Wall Mount Stainless Steel Wash Station**



Model	Flow-Rate
512W1	Standard 2.0 GPM
512W1-0.5	Low-Flow 0.5 GPM

**Product Specifications**

Constructed from welded #16 gauge type 304 stainless steel. The front, bottom and back are formed from a single sheet with a rolled rim on front and sides. Exposed surfaces have a blended uniform satin finish. Specially designed knee valves provide easy access to working parts without disconnecting mount or plumbing.



Outside Dimensions	120" x 20" x 18" High
Inside Bowl Size	117" x 16-1/2" x 8" Deep
Back Splash Height	10"
Water Activation	Single Knee Pedal Valve
Flow Rate	2 GPM
Inlet Connections	3/8" Male Compression
Drain Opening	2"
Finish	Satin
Strainer	1-1/2" Dia. Duo Basket Strainer
Wall Mounting Bracket	1/4" Dia. Mounting Holes

**Includes**

- (1) Wall mount wash station
- (6) Single knee pedal valve with 4 nuts
- (6) Swivel gooseneck spout with aerator
- (6) Connecting tube for valve to spout connection
- (12) Fittings, brass, 0.375" male compression and 0.375" male NPT
- (6) Mixing check valve
- (4) Wall-mounting brackets
- (4) Support brackets
- (3) Strainer assembly with basket

**Product Compliance**

NSF/ANSI 2 Food Equipment  
NSF/ANSI 372 Low-Lead



Part: \_\_\_\_\_ Quantity: \_\_\_\_\_

Project: \_\_\_\_\_

Contact: \_\_\_\_\_

Date: \_\_\_\_\_

Approval: \_\_\_\_\_


Notes:




**WARNING:** Equipment that include faucets on this page may contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

## 6-Person Hands-Free Wall Mount Stainless Steel Wash Station Models 512W1 and 512W1-0.5


### ■ Top

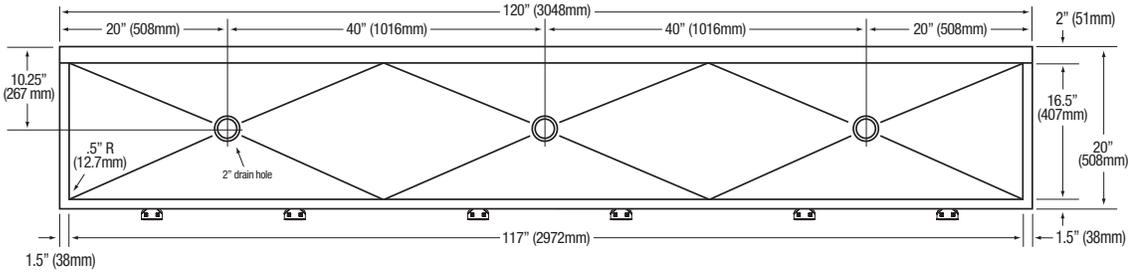


### ■ Front

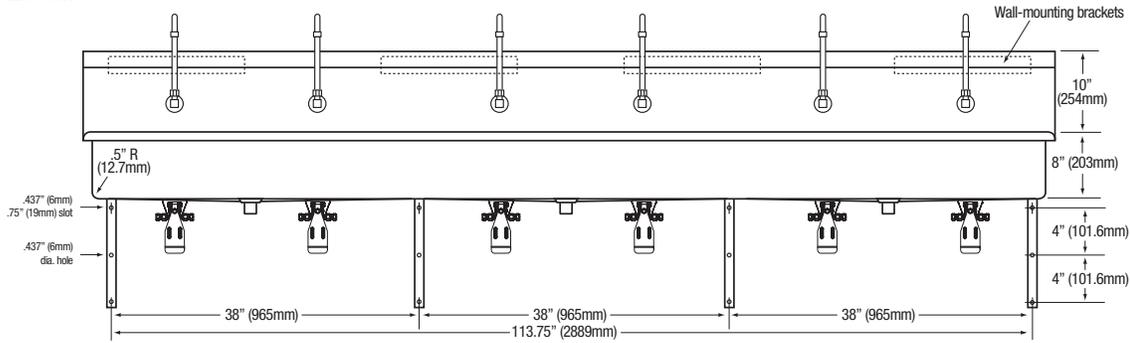


### ■ Side

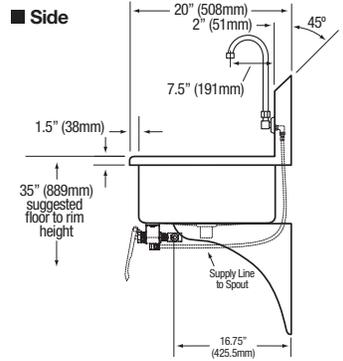

### ■ Hole Configurations

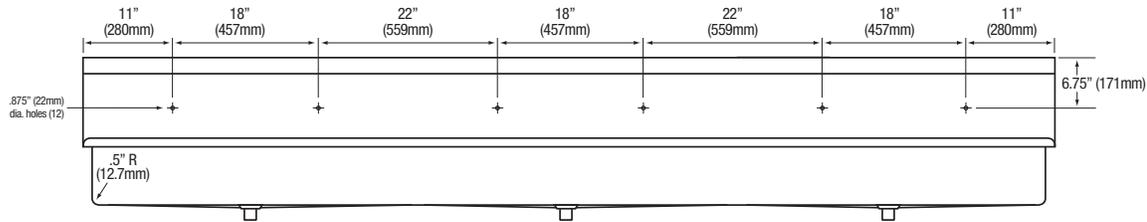

### ■ Wall Mounting Detail



### ■ Supply Line Detail

