





5-FS-FM

FIVE LAMP TABLE SIZED UNITS (MOUNTED)

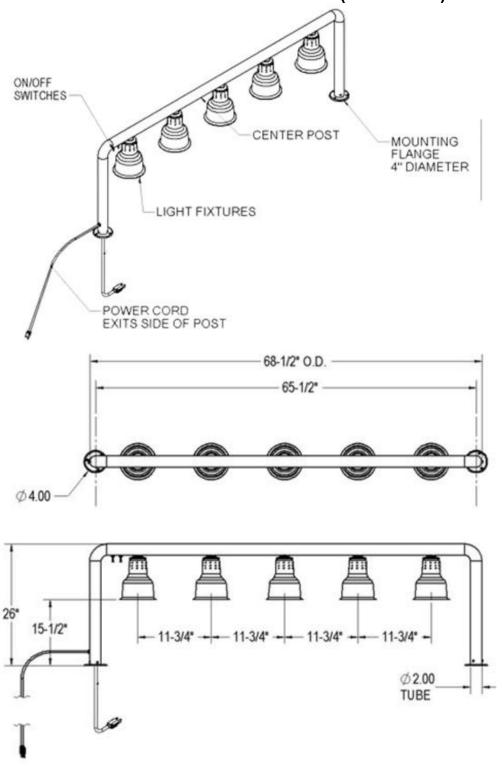







5-FS-FM

FIVE LAMP TABLE SIZED UNITS (MOUNTED)

Description: The Hanson 5-FS is a 5 bulb Mounted Bar Heat Lamp. The 5-FS is designed to fit a 6' table and comes with flanges and screws for the customer to mount to the desired counter. This heat lamp's versatile design makes it the perfect solution for keeping your steam pans, trays, and serving platters at an optimal serving temperature. All internal components including lamp sockets and wiring are high temperature rated (200°C. Switches are rated for 15 amps @ 120 volts. Power cord can exit through the side of upright or through bottom of upright depending on customer requirements.

| Standard Models | | |
|--|----------------------------------|---|
| Model Number | Description | |
| 5-FS-FM | Five lamp fixture mounted warmer | |
| Available finishes: Black, Stainless Steel, and Chrome | | |
| Available Lamp Shades: 200, 300, 500, 600, 900 | | |
| Note: Please specify power cord location, through side of post or through the bottom. | | |
| Specifications | | |
| Mechanical | | |
| Light head material | | Aluminum, Stainless Steel |
| Light heads | | Varies depending on which model chosen |
| | | 200 Shade: 15 ½" |
| Light head height from mounting | | 300 Shade: 15 3/4" |
| surface | | 500 Shade:15 3/4" |
| | | 600 Shade: 15 1/2" |
| | | 900 Shade: 14 1/2" |
| Upright and all fittings | | Stainless steel |
| Shipping weight | | 39 lbs. |
| Internal wiring | | 18 gauge Silver stranded with Teflon insulation. Rated (200° C) |
| Lamp socket | | Glazed porcelain/nickel. Rated (200° C) |
| Switches | | On/Off rated 15 amps @ 115 VAC |
| Power cord | | 115 VAC-18 gauge 3 conductor cable 84" long with |
| | | Nema 5-15P plug (standard) |
| | | 230 VAC-18 gauge 3 conductor harmonized cable |
| | | 84" long with Schuko plug (standard). |
| | | Cord can exit from side of upright tube or through |
| | | bottom of upright tube. |
| Electrical | | |
| Operating Voltage (Domestic) | | 120 volts 60 Hertz single phase |
| Operating Voltage (International) | | 240 volts 50 Hertz single phase |
| Power | | 1250 watts Maximum, shatterproof design. |
| Operating amperage | | 10.5 amps (115 VAC) 5.25 amps (230 VAC) |
| Bulb type | | Infrared 250 watts maximum, shatterproof design |
| 71 | | , , |