


DEFROST	EVAPORATOR MODEL:										CONNECTION SIZES				ACCESSORIES			
	QTY	MODEL	CFM	REFRIG	BTUH	FAN 1ø		DEFROST HEATERS			SUCTION	LIQUID	WEIGHT (lbs.)	DRAIN LINE	DEFROST TIMER	CONTROLS		
						AMP	V	AMP	V	ø						TSTAT	SOL VAL	EXP VAL
A	1	AMC36-128-1EC-PR-A	1,806	R454A	12,915	2.4	115				7/8" ODF	3/8" ODF	95	3/4" MPT	X	X	X	X
LEGEND: O=Off Cycle, A=Air w/Timer E=Electric Defrost D=Demand Electric Defrost											POWER SUPPLY: 115/1/60 TOTAL CONNECTED LOAD AMPS: 2.4A MINIMUM CIRCUIT AMPACITY: 15A MAXIMUM OVERCURRENT PROTECTION: 20A				AWEF: 9.00			

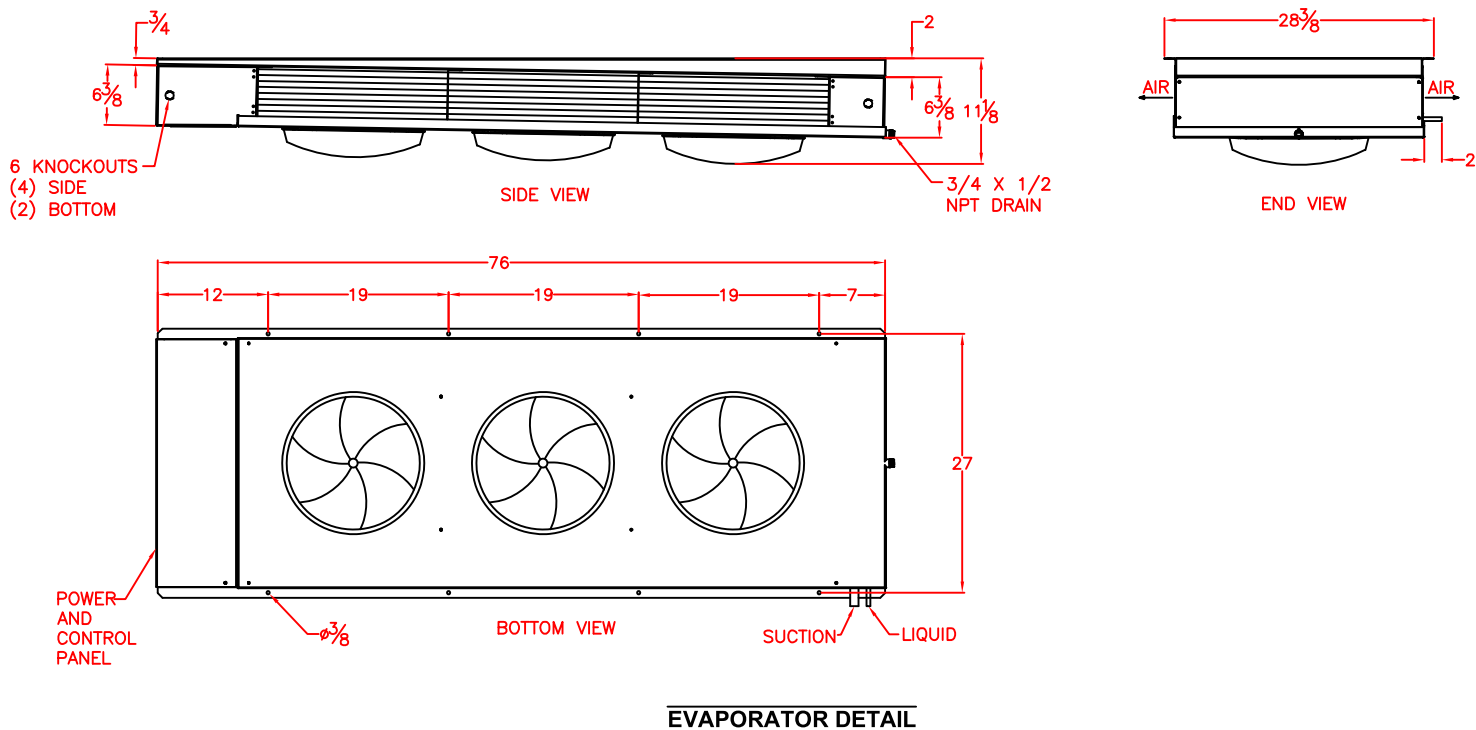

ITEMS PROVIDED INCLUDE:

1. Expansion Valve (Installed-Evap)
2. Digital Temperature Control (Installed-Evap)
3. EC Evaporator Fan Motors - 2 Speed
4. Leak Detection Sensor (Installed-Evap)
5. Safety Shut-Off / Liquid Line Solenoid Valve (Shipped Loose)
6. Safety Check Valve (Shipped Loose)

DATE		REVISION RECORD		AUTH	DR	CK
AMC36-128-1EC-PR-A						
SCALE: NONE		DEALER:		DRAWN BY: SCG		
DATE: 9/3/2025				REVISED		
RDI QUOTE NO:						
DRAWING NUMBER						
AMC36-128-1EC-PR-A						