


DEFROST	EVAPORATOR MODEL:										CONNECTION SIZES				ACCESSORIES			
	QTY	MODEL	CFM	REFRIG	BTUH	FAN 1Ø		DEFROST HEATERS			SUCTION	LIQUID	WEIGHT (lbs.)	DRAIN LINE	DEFROST TIMER	CONTROLS		
						AMP	V	AMP	V	Ø						TSTAT	SOL VAL	EXP VAL
A	1	AMC46-173-1EC-PR-A	2,408	R454A	17,430	3.2	115				7/8" ODF	3/8" ODF	120	3/4" MPT	X	X	X	X
LEGEND: <i>O=Off Cycle,</i> <i>A=Air w/Timer</i> <i>E=Electric Defrost</i> <i>D=Demand Electric Defrost</i>											POWER SUPPLY: 115/1/60 TOTAL CONNECTED LOAD AMPS: 3.2A MINIMUM CIRCUIT AMPACITY: 15A MAXIMUM OVERCURRENT PROTECTION: 20A				AWEF: 9.00			

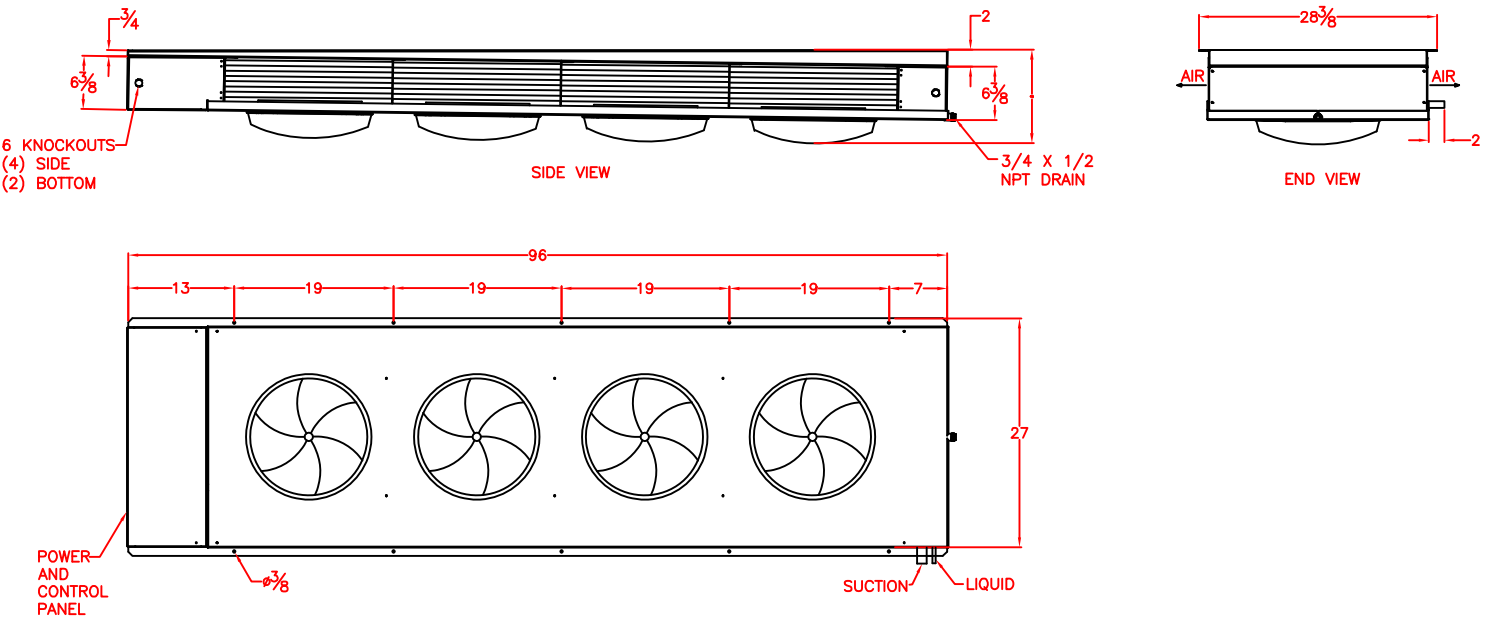

EVAPORATOR DETAIL

ITEMS PROVIDED INCLUDE:

1. Expansion Valve (Installed-Evap)
2. Digital Temperature Control (Installed-Evap)
3. EC Evaporator Fan Motors - 2 Speed
4. Leak Detection Sensor (Installed-Evap)
5. Safety Shut-Off / Liquid Line Solenoid Valve (Shipped Loose)
6. Safety Check Valve (Shipped Loose)

DATE		REVISION RECORD		AUTH	DR	CK
AMC46-173-1EC-PR-A						
SCALE: NONE		DEALER:		DRAWN BY: SCG		
DATE: 9/3/2025				REVISED		
RDI QUOTE NO:						
DRAWING NUMBER						
AMC46-173-1EC-PR-A						