



Stainless Steel Table Guide



Superior by Design

Stainless steel tables reimagined and re-engineered from the ground up to eliminate tubular frames and hollow components.

Always Stainless

High quality materials result in high quality products for sanitary environments.

Fully Formed

No tubing or hollow components whatsoever, eliminating areas for bacteria and contaminants to harbor.



Simple Sanitation

Engineered with sanitation and maintenance teams in mind. Simple designs mean simple, less time-consuming sanitation.

Selection

Choose from five different footing options and eight different dimensions to find the table best suited for your needs.

Durable

Built to withstand prolonged use and harsh routine sanitation.



Top

The top is formed of 11 gauge / 304 stainless steel and TIG welded complete to the frame. Our patented design eliminates all closed channels and requires no nuts, bolts, or threads for assembly.

Frame

The frame is constructed of 11 gauge / 304 stainless steel and utilizes completely formed components (no tubular or hollow components). The frame is TIG welded complete and the table is fully assembled. Weight capacity = 1,200 lbs.

Finish


All components receive a dual-action medium Scotch-Brite finish and all welds are passivated.

Footing Options

- Paw Print
- Casters
- UHMW Pads
- Adjustable Pads
- Adjustable UHMW Pads

Shipping

All tables ship LTL/FTL

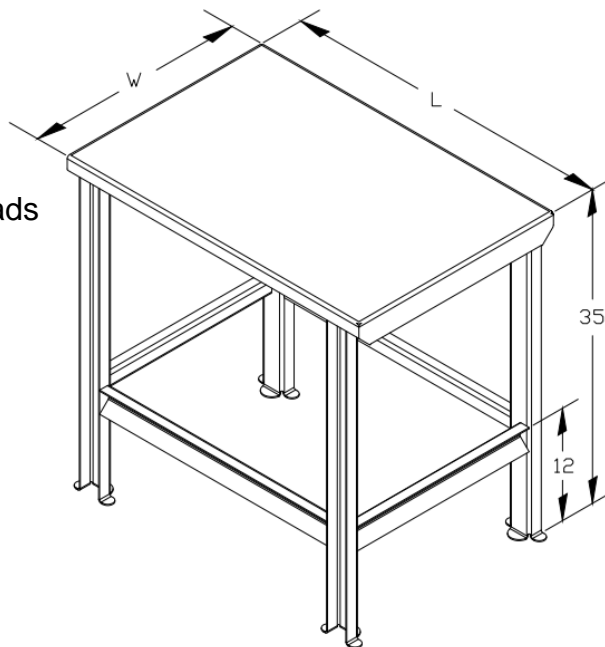

Standard Dimensions

Length	Width	Height
36"	24"	35"
36"	30"	35"
48"	24"	35"
48"	30"	35"
60"	24"	35"
60"	30"	35"
72"	24"	35"
72"	30"	35"



- SSL Industries' proprietary design
- (3) Formed tabs on the base of the foot for ample stability
- Most preferred option by regulatory bodies due to inherit clean design and sanitation
- USDA Accepted Equipment
- Per the USDA, compliant with the NSF/ANSI/3-A SSI-14159-1-2019 Hygiene Requirement for the Design of Meat and Poultry Processing Equipment

Model No.	Dimensions			Footing
	L	W	H	
SSL-1001-36X24	36"	24"	35"	Paw Print
SSL-1001-36X30	36"	30"	35"	Paw Print
SSL-1001-48X24	48"	24"	35"	Paw Print
SSL-1001-48X30	48"	30"	35"	Paw Print
SSL-1001-60X24	60"	24"	35"	Paw Print
SSL-1001-60X30	60"	30"	35"	Paw Print
SSL-1001-72X24	72"	24"	35"	Paw Print
SSL-1001-72X30	72"	30"	35"	Paw Print



- Standard 4" solid blue polyurethane wheels
- (2) Rigid and (2) swivel with total locking brakes
- Load capacity of 300 lbs. per caster (1,200 lbs. per table)
- Temperature resistance -40°F to +180°F
- ½" Stainless steel spacers between footing and caster plates
- Stainless steel carriage bolts and acorn nuts
- USDA Accepted Equipment
- Per the USDA, compliant with the NSF/ANSI/3-A SSI-14159-1-2019 Hygiene Requirement for the Design of Meat and Poultry Processing Equipment

Model No.	Dimensions			Footing
	L	W	H	
SSL-1001-C-36X24	36"	24"	35"	½" SS Spacers & 4" Casters
SSL-1001-C-36X30	36"	30"	35"	½" SS Spacers & 4" Casters
SSL-1001-C-48X24	48"	24"	35"	½" SS Spacers & 4" Casters
SSL-1001-C-48X30	48"	30"	35"	½" SS Spacers & 4" Casters
SSL-1001-C-60X24	60"	24"	35"	½" SS Spacers & 4" Casters
SSL-1001-C-60X30	60"	30"	35"	½" SS Spacers & 4" Casters
SSL-1001-C-72X24	72"	24"	35"	½" SS Spacers & 4" Casters
SSL-1001-C-72X30	72"	30"	35"	½" SS Spacers & 4" Casters



- 1" Thick rectangular UHMW pads on the base of footing for ease of mobility
- Relieved corners on the base of the footing for drainage
- Stainless steel hex cap screws
- USDA Accepted Equipment
- Per the USDA, compliant with the NSF/ANSI/3-A SSI-14159-1-2019 Hygiene Requirement for the Design of Meat and Poultry Processing Equipment

Model No.	Dimensions			Footing
	L	W	H	
SSL-1001-P-36X24	36"	24"	35"	UHMW Pads
SSL-1001-P-36X30	36"	30"	35"	UHMW Pads
SSL-1001-P-48X24	48"	24"	35"	UHMW Pads
SSL-1001-P-48X30	48"	30"	35"	UHMW Pads
SSL-1001-P-60X24	60"	24"	35"	UHMW Pads
SSL-1001-P-60X30	60"	30"	35"	UHMW Pads
SSL-1001-P-72X24	72"	24"	35"	UHMW Pads
SSL-1001-P-72X30	72"	30"	35"	UHMW Pads



- 7GA stainless steel circular pads welded complete to thread, offering 1-3/4" of adjustability on all feet
- Relieved corners on the base of the footing for drainage
- Completely removable for washdown and sanitation
- Stainless steel hex nuts
- *NOTE: Adjustable feet not USDA Approved Equipment or NSF/ANSI/3-A Compliant due to exposed threads*

Model No.	Dimensions			Footing
	L	W	H	
SSL-1001-A-36X24	36"	24"	35"	Adjustable Pads
SSL-1001-A-36X30	36"	30"	35"	Adjustable Pads
SSL-1001-A-48X24	48"	24"	35"	Adjustable Pads
SSL-1001-A-48X30	48"	30"	35"	Adjustable Pads
SSL-1001-A-60X24	60"	24"	35"	Adjustable Pads
SSL-1001-A-60X30	60"	30"	35"	Adjustable Pads
SSL-1001-A-72X24	72"	24"	35"	Adjustable Pads
SSL-1001-A-72X30	72"	30"	35"	Adjustable Pads



- 7GA / 304 stainless steel circular pads welded complete to thread with 1" UHMW, offering 1-3/4" of adjustability on all feet
- Relieved corners on the base of the footing for drainage
- Completely removable for washdown and sanitation
- Stainless steel hex screw and nuts
- *NOTE: Adjustable feet not USDA Approved Equipment or NSF/ANSI/3-A Compliant due to exposed threads*

Model No.	Dimensions			Footing
	L	W	H	
SSL-1001-AP-36X24	36"	24"	35"	Adjustable UHMW Pads
SSL-1001-AP-36X30	36"	30"	35"	Adjustable UHMW Pads
SSL-1001-AP-48X24	48"	24"	35"	Adjustable UHMW Pads
SSL-1001-AP-48X30	48"	30"	35"	Adjustable UHMW Pads
SSL-1001-AP-60X24	60"	24"	35"	Adjustable UHMW Pads
SSL-1001-AP-60X30	60"	30"	35"	Adjustable UHMW Pads
SSL-1001-AP-72X24	72"	24"	35"	Adjustable UHMW Pads
SSL-1001-AP-72X30	72"	30"	35"	Adjustable UHMW Pads