



Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle One-Compartment Sink, model _____, with 2"-wide "Euro-Style" edging on front and sides. Sink bowl is heavy gauge type 304 stainless steel, with 13½" water level, deep drawn, seamless and have all corners coved. Top—including backsplash, and drainboards (when required)—is heavy gauge type 430 stainless steel. Drainboards shall be "V" creased for positive drainage. 9½" high backsplash with 1" upturn and tile edge. Legs to be 1½" O.D. galvanized tubing with front-to-back crossbracing, and 1" high impact plastic adjustable bullet feet.



**FEATURING
2"-WIDE
EURO-STYLE
EDGING**

Options / Accessories

- | | |
|--|--|
| ☐ Stainless steel legs | ☐ Faucets |
| ☐ Stainless steel bullet feet | ☐ Sink covers |
| ☐ Lever drains | ☐ Waste outlets |
| ☐ Twist handle drains | ☐ Sink kits |
| ☐ Twist drain brackets | ☐ Overflow hole |

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our **SpecFAB Division**.

Phone: 302-653-3000 • Fax: 302-653-3091 • e-mail: specfab@eaglegrp.com

Item No.: _____
Project No.: _____
S.I.S. No.: _____

414 Series Coved Corner One-Compartment Sinks

MODELS:

- | | | | |
|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| ☐ 414-16-1 | ☐ 414-18-1 | ☐ 414-22-1 | ☐ 414-24-1 |
| ☐ 414-16-1-18 | ☐ 414-18-1-18 | ☐ 414-22-1-18 | ☐ 414-24-1-18 |
| ☐ 414-16-1-18L | ☐ 414-18-1-18L | ☐ 414-22-1-18L | ☐ 414-24-1-18L |
| ☐ 414-16-1-18R | ☐ 414-18-1-18R | ☐ 414-22-1-18R | ☐ 414-24-1-18R |
| ☐ 414-16-1-24 | ☐ 414-18-1-24 | ☐ 414-22-1-24 | ☐ 414-24-1-24 |
| ☐ 414-16-1-24L | ☐ 414-18-1-24L | ☐ 414-22-1-24L | ☐ 414-24-1-24L |
| ☐ 414-16-1-24R | ☐ 414-18-1-24R | ☐ 414-22-1-24R | ☐ 414-24-1-24R |

Materials

- Sink bowl: Heavy gauge type 304 stainless steel.
- Top: Drainboards, backsplash and euro-style edging are heavy gauge type 430 stainless steel.
- Legs: 1½" (41mm)-diameter heavy-gauge galvanized tubing with plated 12-gauge gussets and high-impact corrosion resistant fully adjustable bullet feet - crossbracing is 1" (25mm)-diameter heavy-gauge galvanized tubing.

Design and Construction Features

- Bowl features deep-drawn one-piece seamless construction, using state-of-the-art hydraulic presses.
- Sink bowl has generous radius with a minimum dimension of 3" (76mm) and are rectangular for maximum capacity.
- New 20" x 16" (508 x 406mm) bowl design, with enhanced polishing techniques.
- 13½" (343mm) water level is standard.
- Swirl-away drainage.
- Leg gusset assemblies welded adjacent to sink bowl for maximum weight support and stability.
- 9½" (241mm) standard backsplash includes 1" (25mm) upturn and tile edge for easy installation and feathering to wall/splash surface.
- "V" creased drainboards for positive drainage.

Mechanical:

- Water supply is ½" (13mm) IPS for hot and cold lines.
- Faucet holes are 1½" (29mm) punched on 8" (203mm) centers.
- Basket-type waste drain included fits sink bowl's 3½" (89mm) opening and features 1½" (38mm) outlet.

Certifications / Approvals



AUTOQUOTES



EG20.23 Rev. 10/12

Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com





Eagle Foodservice Equipment, Eagle MHC, SpecFAB, and Retail Display are divisions of Eagle Group. ©2012 by the Eagle Group



Profit from the Eagle Advantage®

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

414 Series Coved Corner One-Compartment Sinks

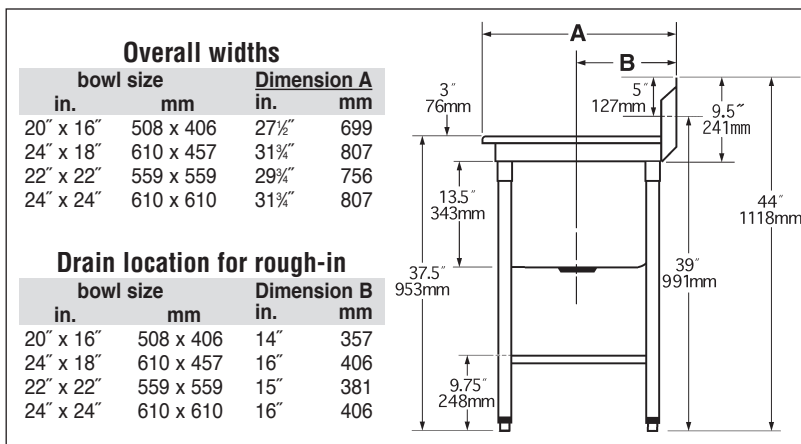

Please note the pair of legs located under the OUTER area of drainboard
(only on one-compartment sinks with one drainboard)

model #	BOWL DIMENSIONS				quantity		DRAINBOARD		OVERALL DIMENSIONS				weight	
	width	length	width	length			width	length	width	length	width	length		
	in.	mm	in.	mm			in.	mm	in.	mm	in.	mm	lbs.	kg
414-16-1	20"	508	16"	406	0	-	27 1/2"	699	23 3/4"	591	40	18.1		
414-16-1-18R or L	20"	508	16"	406	1	18"	457	27 1/2"	699	38 7/8"	987	59	26.8	
414-16-1-18	20"	508	16"	406	2	18"	457	27 1/2"	699	54 1/2"	1384	78	35.4	
414-16-1-24R or L	20"	508	16"	406	1	24"	610	27 1/2"	699	44 7/8"	1140	65	29.5	
414-16-1-24	20"	508	16"	406	2	24"	610	27 1/2"	699	66 1/2"	1689	90	40.8	
414-18-1	24"	610	18"	457	0	-	31 1/4"	807	25 1/2"	648	45	20.4		
414-18-1-18R or L	24"	610	18"	457	1	18"	457	31 1/4"	807	40 3/4"	1035	64	29.0	
414-18-1-18	24"	610	18"	457	2	18"	457	31 1/4"	807	56"	1422	83	37.6	
414-18-1-24R or L	24"	610	18"	457	1	24"	610	31 1/4"	807	46 3/4"	1188	70	31.8	
414-18-1-24	24"	610	18"	457	2	24"	610	31 1/4"	807	68"	1727	95	43.1	
414-22-1	22"	559	22"	559	0	-	29 3/4"	756	29 1/2"	749	55	24.9		
414-22-1-18R or L	22"	559	22"	559	1	18"	457	29 3/4"	756	45"	1143	74	33.6	
414-22-1-18	22"	559	22"	559	2	18"	457	29 3/4"	756	60 1/2"	1537	93	42.2	
414-22-1-24R or L	22"	559	22"	559	1	24"	610	29 3/4"	756	51"	1295	80	36.3	
414-22-1-24	22"	559	22"	559	2	24"	610	29 3/4"	756	72 1/2"	1842	105	47.6	
414-24-1	24"	610	24"	610	0	-	31 3/4"	807	31 1/2"	800	60	27.2		
414-24-1-18R or L	24"	610	24"	610	1	18"	457	31 3/4"	807	46 3/4"	1188	79	35.8	
414-24-1-18	24"	610	24"	610	2	18"	457	31 3/4"	807	62"	1575	98	44.5	
414-24-1-24R or L	24"	610	24"	610	1	24"	610	31 3/4"	807	52 3/4"	1340	85	38.6	
414-24-1-24	24"	610	24"	610	2	24"	610	31 3/4"	807	74"	1880	110	49.9	

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440

MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A.
 ©2012 by Eagle Group

Rev. 10/12

Spec sheets available for viewing, printing or downloading from our online literature library at www.eaglegrp.com

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.