Filter Bag Spec Sheet





Efficient and safe filtering without a filter machine Improves the performance of portable filter machines Filter as many as 1000 fryers for ½ the cost of paper filters



BETTERCaptures micron size particles Does not leach chemicals into oil.

FASTER *Much more filter area for oil flow.*

SAFERFilter at bath water temperature with EZ FlowTM f<u>ilters</u>.

Filter Bags

	EZ FLOW TM Series • Safe filtering at bath water temps.* • Filter oil at frying temperatures. • For heavy crumb loads.					Oil Polishing series • Filter oil at frying temperatures. • Captures micron size particles.		
Filter Bag Model	RB6PS	RB33PS	RCONE2B	RD44PS	RC88PS	RB5FS	RB22FS	RC77FS
Filter Assembly (Filter Bag & Holder Frame)	B6PS	<u>B33PS</u>	CONE2B	D44PS	<u>C88PS</u>	<u>B5FS</u>	B22FS	C77FS
Use for Fryer Oil Capacity to:	40 qts / 38 ltr 70 lbs / 32 kg	16 qts / 15 ltr 28 lbs / 13 kg	16 qts / 15 ltr 28 lbs / 13 kg	16 qts / 15 ltr 28 lbs / 13 kg	60 qts / 57 ltr 100 lbs / 45 kg	30 qts / 28 ltr 50 lbs / 23 kg	16 qts / 15 ltr 28 lbs / 13 kg	50 qts / 47 ltr 85 lbs / 39 kg

Dimensions	RB6PS	RB33PS	RCONE2B	RD44PS	RC88PS	RB5FS	RB22FS	RC77FS
Length (A)	11"	11"	8"	7.5"	14"	11"	11"	14"
Width (B)	9"	9"	8"	7"	12"	9"	9"	12"
Depth (C)	7"	6"	10"	8"	8.5"	7.5"	6"	7.5"
Shipping Weight	2 lbs	2 lbs	2 lbs	2 lbs	2 lbs	2 lbs	2 lbs	2 lbs


Skim Filter For skimming and top filtering

Model	RSKIM4F	SK4		
Description	Filter Bag	Holder/Frame		
Length	7"	13"		
Width	7.5"	7.5"		



Holder/Frames For filter bags

Model	Use with Filter Bag	Dimer	Shipping		
Wodel	USE WILLI FILLER BAG	В	D	Weight	
BF1A	RB6PS, RB33PS, RB5FS & RB22FS	9"	22.5"	2 lbs	
DF3A	RD44PS, RCONE2B	7.25"	18"	2 lbs	
CF2A	C88PS and C77FS	13"	24"	3 lbs	



Model B6PS Holder / Frame and filter bag shown with MirOil Filter pot Model 60LC



FRYER FILTER BAG



- Rugged, electro polished stainless steel frame.
- · Will not leach chemicals into the oil.
- Filter as many as 1000 fryers for ½ the cost of paper filters.
- Very thin but resistant to wear.
- · Just rinse in water and reuse.
- · Capable of filtering oil at frying temperatures.

Contact Us

+1.980.890.7010

orders@MirOil.com


13114 Bleinheim Lane STE B, Matthews 28105

www.MirOil.com







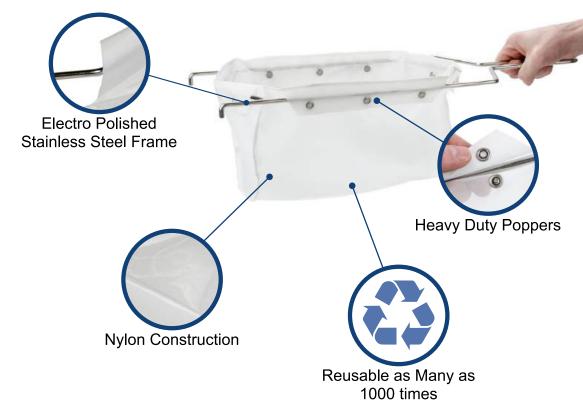



^{*}Recommended filtering at bath water temps for personal safety