

# 3M™ Water Filtration Products

SPEC# \_\_\_\_\_

QUANTITY \_\_\_\_\_

application:

**ICED TEA & ESPRESSO  
EQUIPMENT**

model:

**CFS6090 & CFS6135**



CFS56090-C

The 3M™ Water Filtration Products CFS6090 & CFS6135 water treatment systems are designed to help reduce hard scale build-up on espresso machine boilers, improve beverage clarity and increase holding times in brewed tea, as well as maintaining efficient brewing machine operations. High capacity sodium ion exchange resin reduces hard scale that causes equipment break down and increased energy consumption.

## PRODUCT BENEFITS

- Valve-in-head design simultaneously shuts off and vents water with 1/4 turn, allowing for simple and virtually trouble-free cartridge change-outs.
- 3/8" NPT vertical ports.
- CFS6090 removes hardness up to 900 grains and the CFS6135 removes hardness up to 1,350 grains for extended capacity.
- Sanitary Quick Change (SQC) encapsulated cartridges reduce contamination during change-outs.
- NSF and/or FDA CFR-21 compliant materials.

## PRODUCT SPECIFICATIONS

Model Number	Part Number	Resin Type	Micron Rating	Capacity	System Flow Rate	Application	Replacement Cartridge	Sizing
CFS6090	55993-01	Cation Exchange	N/A	900 Grains	0.5 gpm (1.9 lpm)	Up to 20 Grains Hardness	SWC-900	See Formula*
CFS6135	55993-03			1,350 Grains			SWC-1350	

To determine sizing:

Divide the grain capacity of the system by the incoming water hardness to determine gallons (liters) of water treated.

Example:

$$\frac{\text{System Capacity}}{\text{Incoming Hardness}} = \text{Gallons Treated}$$

Incoming hardness @ 15 grains/gallon  
System capacity @ 1,350 grains  
Gallons (liters) treated = 90 gal. (341 lit.)



# CFS6090 & CFS6135


# 3M™ Water Filtration Products

SPEC# \_\_\_\_\_

QUANTITY \_\_\_\_\_

MODEL NUMBER \_\_\_\_\_

PART NUMBER \_\_\_\_\_

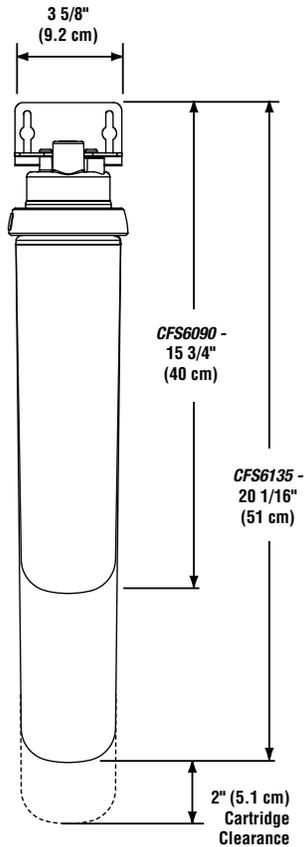

**⚠ WARNING: To reduce the risk associated with the ingestion of contaminants:**

- Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

CUNO Incorporated recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold. CUNO shall not be liable for system failures due to improper maintenance.

## LIMITED WARRANTY

CUNO Incorporated warrants this Product to be free from defects in material and workmanship for five (5) years from the date of purchase. This warranty does not cover failures resulting from abuse, misuse, alteration or damage not caused by CUNO or failure to follow installation and use instructions. If the Product is defective CUNO will replace the Product or refund your Product purchase price. CUNO will not be liable for any indirect, special, incidental, or consequential damages arising from the use of this Product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you. To obtain warranty service, mail your request to Warranty Claims, CUNO Incorporated, 400 Research Parkway, Meriden, CT 06450. Proof of purchase (original sales receipt) must accompany the warranty claim, along with a complete description of the Product, model number and alleged defect. This warranty gives you specific legal rights and you may have other rights which vary from state to state, or country to country.

## PHYSICAL SPECIFICATIONS

- System is a single vessel design.
- 3/8" NPT vertical connections.
- System reduces carbonate hardness through the use of ion exchange resin.
- Resin has no color throw in the effluent water.
- System maximum operating pressure of 125 psi (862 kPa) and operating temperatures of 100°F (37.8°C).
- Each system has a service flow rate of 0.5 gpm (1.9 lpm).
- System materials are FDA CFR-21 and/or NSF compliant.
- Cartridges are sanitary in design, requiring no contact with the filter media during cartridge change-out.

## IMPORTANT: INSTALLATION TIPS

These installation tips are for informational purposes only and are not intended to be used as actual installation instructions. CAUTION: To reduce the risk associated with property damage due to water leakage:

- **Read and follow** Use Instructions before installation and use of this system.
- Installation and use **MUST** comply with all state and local plumbing codes.
- **Protect from freezing**, remove filter cartridge when temperatures are expected to drop below 40°F (4.4°C).
- **Do not install on hot water supply lines.** The maximum operating water temperature of this filter system is 100°F (37.8°C).
- **Do not install** if water pressure exceeds 125 psi (862 kPa). If your water pressure exceeds 80 psi (552 kPa), you must install a pressure limiting valve. Contact a plumbing professional if you are uncertain how to check your water pressure.
- **Do not install** where water hammer conditions may occur. If water hammer conditions exist you must install a water hammer arrester. Contact a plumbing professional if you are uncertain how to check for this condition.
- The disposable filter cartridge **MUST** be replaced every 12 months, at the rated capacity or if a noticeable reduction in flow rate occurs.

