


Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

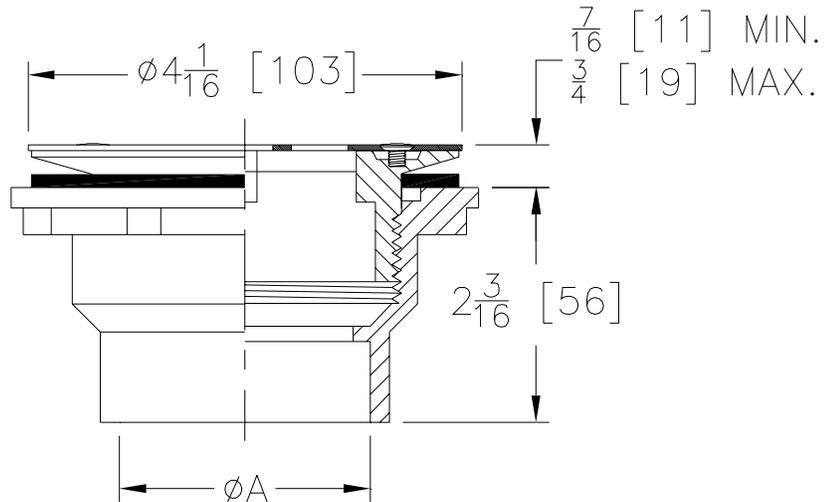

Product	'A' Connections	Grate Open Area Sq. In [cm ²]
___ FD2260-PV2	2 [51] PVC Socket Weld	3 [21]
___ FD2260-AB2	2 [51] ABS Socket Weld	

FD2260 Shower Stall Drain

Recommended for molded shower stalls where the drain body is installed on the pipe before the shower unit is permanently placed. Complete with PVC/ABS body, gasket seal, and stainless steel strainer.

Typical installation

