

Refrigeration Equipment 2-Door Full Height Refrigerator 54" Long

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



738242 (KCHRI54R2DRE)

2-Door Full Height
Refrigerator 54" Long

Short Form Specification

Item No.

2 full door refrigerator with exterior top, back, and bottom panels in galvanized steel, exterior side panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel. Control with cabinet temperature display. Self-closing and on-site reversible door feature with lock and key.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.

Construction

- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Lockable door.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability


- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.

Optional Accessories


- 1 ADJUSTABLE FOOT PNC 206445 ☐
- Shelf for 54" and 81" (left/right) Reach-In (Solid Door) PNC 880591 ☐
- Shelf clips (4-pack) PNC 880611 ☐
- Sheet Pan Rack Fits KCHRI Models PNC 880622 ☐

APPROVAL: _____

Front

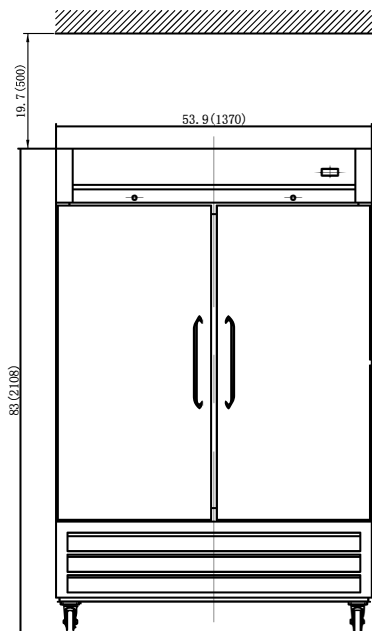


Side

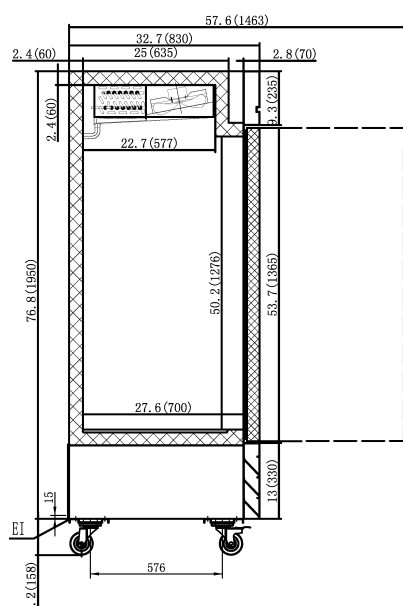

El = Electrical connection

Top

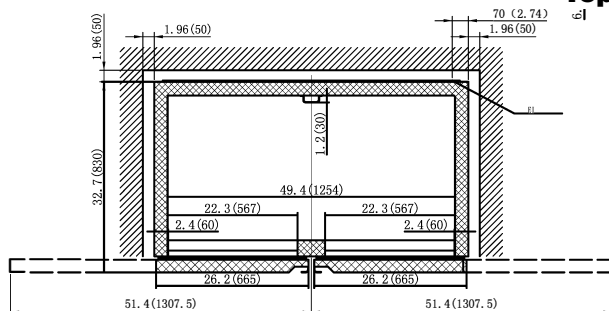

Electric

Supply voltage:

738242 (KCHRI54R2DRE) 115 V/1 ph/60 Hz

Electrical power, max:

0.47 kW

Plug type:

USA NEMA 5-15P

Capacity:

Gross capacity: 46.7 cu.feet

Number and type of grids (included):

6 - 618x600

Key Information:

Door hinges: 1 Left+1 Right
 External dimensions, Width: 53 15/16" (1370 mm)
 External dimensions, Depth: 32 11/16" (830 mm)
 External dimensions, Height: 83 " (2108 mm)
 Number and type of doors: 2 Full
 Internal Dimensions (depth): 27 1/2" (698.5 mm)
 Internal Dimensions (height): 50 3/16" (1275.08 mm)
 Internal Dimensions (width): 49 3/8" (1254.76 mm)
 Shipping height: 84 5/8" (2150 mm)
 Shipping weight: 489 lbs (222 kg)
 Shipping volume: 92.27 ft³ (2.61 m³)
 Type of external material: Stainless Steel
 Type of internal material: 304 AISI
 Warranty: 3 / 5 years

Approvals

ETL C&US; ETL SANITATION;
 ENERGY STAR

Refrigeration Data

Compressor power: 1/3 hp
 Operating temperature min.: 32 °F
 Operating temperature max.: 41 °F
 Condenser type: Fin & tube
 Defrost type: Auto Defrost

Sustainability

Current consumption: 4.5 Amps
 Refrigerant type: R290
 GWP Index: 3
 Refrigerant weight: 105 g