

Non-Refrigerated Self-Service Case



MODEL SHOWN: CO37

- ☐ CO37
- ☐ CO47
- ☐ CO57
- ☐ CO67

Lengths include end panels

36-1/4"L x 33"D x 79-3/4"H
47-1/4"L x 33"D x 79-3/4"H
59-1/4"L x 33"D x 79-3/4"H
71-1/4"L x 33"D x 79-3/4"H

STANDARD FEATURES

- One year parts & labor warranty
- Shelving removable and adjustable on 1" centers
- T-8 top light(s)

Features	Standard	Options
EXTERIOR COLOR	☐ Laminated (non-premium) Confirm pattern/grain direction	☐ Laminated (premium) Confirm pattern/grain direction ☐ Stainless steel (includes lower front panel)
INTERIOR COLOR	☐ Black	☐ Stainless steel
LOWER FRONT PANEL COLOR	☐ Painted - Black	☐ Stainless steel (w/stainless ext. only)
BASE	☐ Casters w/ levelers	☐ Levelers (only) ☐ Seismic levelers (Q4695)
END PANEL LEFT	☐ Full end panel w/mirror interior	☐ Cutaway end panel ☐ No end panel (for same case to case connect)
END PANEL RIGHT	☐ Full end panel w/mirror interior	☐ Cutaway end panel
EXTERIOR BACK PANEL	☐ Solid back panel, black	☐ Solid back panel, stainless steel
SHELVING	☐ Metal shelves, non-lighted	☐ Metal shelves, lighted (LED 3500K) ☐ Metal shelves, lighted (T-8)
ELECTRICAL CONNECT	☐ 12" straight blade power cord	☐ 12" locking power cord ☐ Electrical leads (non-refrigerated)
MISCELLANEOUS		☐ Roll-down security cover, locking (Requires two end panels (full or cutaway) per case) ☐ Second year parts & labor warranty
ACCESSORIES		☐ Price tag moulding (matches interior color)


Oasis®

Product Specifications


Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

Zone	Intended Product To Be Displayed	Integrated Prod Temp ° F
All	Packaged non-refrigerated products	Ambient

PLAN VIEW

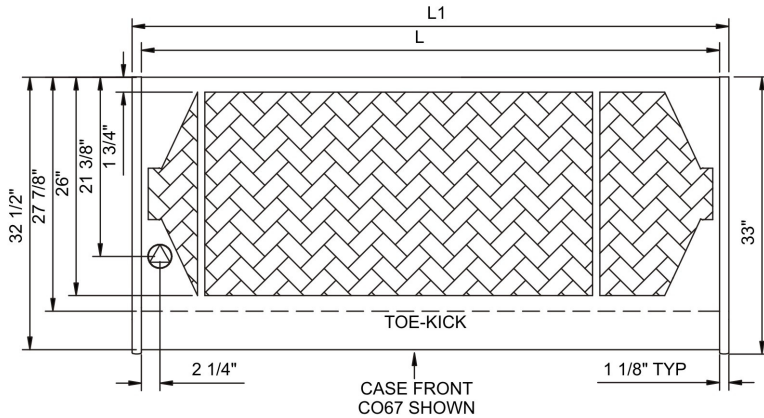

SIDE VIEW

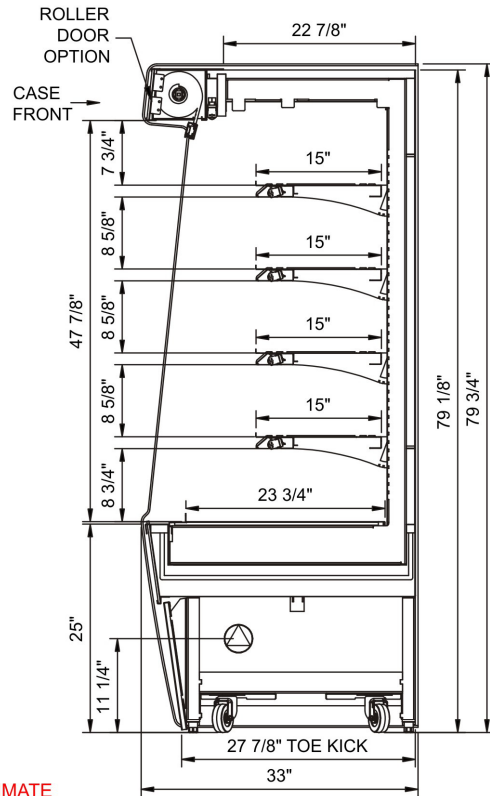

NOTE: ALL DIMENSIONS APPROXIMATE

⊗ ELECTRICAL JUNCTION BOX
(SUPPLIED WITH 6' LEADS OR POWER CORD).
⊙ LOCATION OF DRAIN TUBE FOR REMOTE REF.
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

⊕ REFRIGERATION LINE CONNECTION.
⊞ REMOTE FLOOR SINK & UTILITIES
ACCESS AREA.

⊞ SELF-CONTAINED CASE SERVICE ACCESS AREA.
⊞ DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications															
Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Est Wt
CO37	N/A	36.25	.00	Ambient	Circuit #1	110-120	1	60	0.81	85	2+G	5-15P	N/A	N/A	700
CO47	N/A	47.25	.00	Ambient	Circuit #1	110-120	1	60	1.17	150	2+G	5-15P	N/A	N/A	800
CO57	N/A	59.25	.00	Ambient	Circuit #1	110-120	1	60	1.52	192	2+G	5-15P	N/A	N/A	950
CO67	N/A	71.25	.00	Ambient	Circuit #1	110-120	1	60	2.07	240	2+G	5-15P	N/A	N/A	1,100

*** Does not include electric defrost on freezer models.

Important Notes:

1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF 7



In Accordance with
AHRI Std 1200

DOE 2012
Energy Efficiency
Compliant