

TC 8 VEGAS TC 12 DENVER TC 22 DAKOTA

Meat grinders



TC 8 Vegas



TC 12 Denver

TC 8 VEGAS - TC 12 DENVER

- Reliable light / medium-duty meat grinders
- Dependable gear drive
- Ideal for on-demand operations
- Up to 5 lbs. per minute output
- Easy and fast breakdown for cleaning
- Convenient compartment to store plate and knife

Features

Technical:

- Sealed gear box with hardened gears in oil bath.
- 5 different plates available (3/16", 7/32", 5/26", 3/8", 9/16").
- Stainless steel AISI 304 conveying screw and head (TC 22 DAKOTA).

Sanitary

- Easy and fast cleaning and sanitation.

TC 22 DAKOTA

- Designed for continuous service in high-volume and on-demand operations
- Completely stainless steel housing assembly
- Powerful 1.5 Hp motor
- Stainless steel knife and 3/16" plate included
- Fast breakdown for an easy cleaning
- ON/OFF rotary cam switch with reverse mode to prevent clogging

Specifications

Construction: ABS shockproof sides, aluminum body, conveying screw and head.

Motor TC 8 Vegas: 1/3 Hp (250 W), fan cooled.

Motor TC 12 Denver: 3/4 Hp (550 W) 1 Hp peak, fan cooled.

Motor TC 22 Dakota: 1.5 Hp (1,100 W), fan cooled.

Electrical: 120V AC, 60Hz, single-phase

Plug & Cord: Attached, flexible, 3 wire, 6'4" long cord

TC 8 VEGAS: SJTO 18 AWG, NEMA 5-15 P

TC 12 DENVER: SJTO 16 AWG, NEMA 5-15 P

TC 22 DAKOTA: SJTO 14 AWG, NEMA 5-20 P

Controls: ON (I) / OFF (O) buttons. No volt release (TC 8 VEGAS - TC 12 DENVER)

Controls: Rotary cam switch with reverse. (TC 22 DAKOTA)



Certified to UL Standard 763 and NSF Standard 08
 Certified to CSA Standard C22.2



TC 22 Dakota



Plate Ø 1/8"



Plate Ø 3/16"



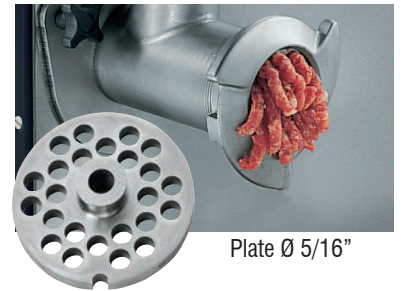


Plate Ø 5/16"



Compartment for knives and blades



	Power	Power source	TC output/h	Standard plate	A	B	C	D	E	F	G	Net weight	Shipping	Gross weight
	watt/Hp		lbs./h.	Ø inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	lbs.	inch.	lbs.
TC 8 Vegas	250/0,34	120V AC, 60Hz 1-ph, 3,5 A	154	1/4"	8 ¹ / ₁₆ "	6 ¹¹ / ₁₆ "	13 ³ / ₁₆ "	11 ¹³ / ₁₆ "	3 ³ / ₈ "	14 ³ / ₁₆ "	16 ¹ / ₈ "	23	22 ¹ / ₁₆ " x 15 ³ / ₄ " x 13 ³ / ₄ "	26
TC 12 Denver	550/0,75	120V AC, 60Hz 1-ph, 12 A	187	1/4"	10 ¹³ / ₁₆ "	7 ¹ / ₂ "	14 ¹³ / ₁₆ "	14 ⁷ / ₁₆ "	3 ¹⁵ / ₁₆ "	14 ³ / ₄ "	17 ¹³ / ₁₆ "	42	22 ¹ / ₁₆ " x 15 ³ / ₄ " x 13 ³ / ₄ "	49
TC 22 Dakota	1100/1,5	120V AC 60Hz, 1-ph, 11 A	264	3/16"	12 ³ / ₁₆ "	8 ⁷ / ₈ "	15 ⁹ / ₁₆ "	14 ³ / ₁₆ "	4 ¹ / ₂ "	16 ⁵ / ₁₆ "	19 ¹ / ₈ "	55	19 ¹ / ₁₆ " x 16 ¹⁵ / ₁₆ " x 17 ¹¹ / ₁₆ "	59