



# C SERIES

2-SECTION COMPACT SOLID DOOR  
UNDERCOUNTER WORKTOP FREEZER



|               |           |          |
|---------------|-----------|----------|
| Project Name: | Location: | AIA #:   |
| Item #:       | Qty:      | Model #: |
|               |           | SIS #:   |

## C SERIES - STAINLESS STEEL EXTERIOR & INTERIOR



### 60" WIDE MODELS

- CLUC-60F-SD-WTLR Hinged Left/Right
- CLUC-60F-SD-WTRR Hinged Right/Right
- CLUC-60F-SD-WTLL Hinged Left/Left

## SPECIFICATIONS

| DIMENSIONAL DATA                |                    |
|---------------------------------|--------------------|
| Capacity cu. ft.                | 16.94 (479.7 cu l) |
| Length in.                      | 60-1/4 (153 cm)    |
| Depth in.                       | 31-1/2 (80 cm)     |
| Overall Height in. <sup>2</sup> | 38 (96.5 cm)       |
| ELECTRICAL DATA                 |                    |
| Horsepower <sup>1</sup>         | 1/2                |
| Amps                            | 6.8                |
| Voltage                         | 115/60/1           |
| NEMA                            | 5-15P              |
| REFRIGERATION DATA              |                    |
| Refrigerant                     | R-290              |
| Charge Amount oz.               | 2.9 (82.2 g)       |
| BTU                             | 1750               |

When ordering please specify:  
Voltage, Hinging, and Options






NEMA 5-15P

- Based on 90°F ambient & 20°F evaporator.
- Overall height includes 4" (10.2 cm) for casters.



ENERGY STAR® Listed Commercial Freezer  
For full listing visit [energystar.gov](http://energystar.gov)

## PLAN VIEW

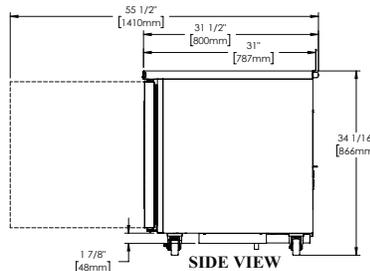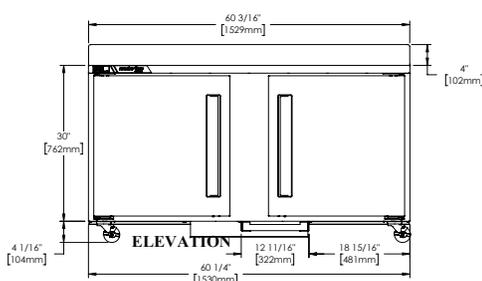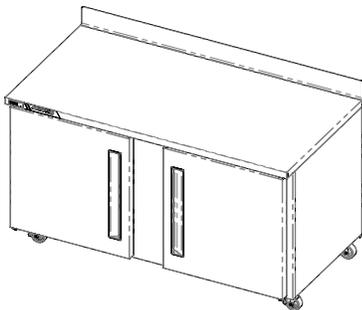

Models listed to applicable UL, CSA, and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

Specifications subject to change without notice. Chart dimensions are rounded up to the nearest 1/16" (centimeters rounded up to the nearest tenth).



# C SERIES

## 2-SECTION COMPACT SOLID DOOR UNDERCOUNTER WORKTOP FREEZER



|               |           |          |        |
|---------------|-----------|----------|--------|
| Project Name: | Location: | AIA #:   |        |
| Item #:       | Qty:      | Model #: | SIS #: |

### REFRIGERATION SYSTEM

- Self-contained, rear-mounted system uses environmentally friendly, minimal GWP R-290 refrigerant
- Front-breathing system allows zero-clearance installation
- Easy access to condenser coil for cleaning
- High performance, balanced system operates at -3 to 3°F (-19 to -16°C) to maintain consistent, food-safe temperatures
- LED display for microprocessor control is water-resistant
- Capillary tube metering device

### CABINET CONSTRUCTION

- Stainless steel exterior and interior
- 4" high stainless steel backsplash
- Exterior top, back, and bottom is constructed of heavy gauge galvanized steel
- Cabinet is insulated with an average of 2-3/8" (6.03 cm) thick high density, non-CFC foamed-in-place polyurethane
- A set of (4) 4" (10.2 cm) high casters; (2) with brakes, (2) without brakes; factory-installed
- 9' cord & plug provided

### DOORS

- Foamed-in-place, recessed handles
- Doors are self-closing with a stay-open feature
- Magnetic, snap-in door gaskets
- Gasket-protecting retainers
- Field-reversible

### INTERIORS

- (2) adjustable, epoxy coated wire shelves per section supported on shelf pins; load should not exceed 150 pounds (68.03 kg)

### FIELD-INSTALLED OPTIONS

- Additional epoxy coated shelves on pilasters
- Set of (4) 6" (15.2 cm) legs
- Set of (4) 6" (15.2 cm) casters
- Set of (4) 2-3/4" (7 cm) casters

### WARRANTY

Both a six-year parts and labor warranty, and an additional one-year compressor parts warranty (for a total of seven years) are provided standard

CAD and/or Revit Files Available

<https://traulsen.klclcad.com>

|              |              |       |
|--------------|--------------|-------|
| Approved by: | Approved by: | Date: |
|--------------|--------------|-------|