




ROUGH-IN DATA

Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			HP	Voltage	Amps	NEMA Config.	Cord Length (total ft.) (total m)	Crated Weight (lbs.) (kg)
			W	D†	H						
CVM-24-HC~EGC01	1	6	27 686	29½ 749	78½ 1993	¼ N/A	115/60/1	3.4 N/A	5-15P	10 3.05	330 150

†Depth does not include 1" (26 mm) for rear bumper or 5/8" (16 mm) for rear mechanical components.

	APPROVALS:	APPROVALS:
07.25	Printed in U.S.A.	

DESIGN

- True's Contemporary Series is built with durability, stability, and style in mind. Through the series' curved edge design it redefines merchandising with its inspired product displays and increased beverage storage.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & 0.02 global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.
- Listed under NSF/ANSI Standard 7 for the storage and/or display of packaged or bottled product.

CABINET CONSTRUCTION

- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent.
- Door sign decal. Variety of decal options available.

- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.
- Insulation - entire cabinet structure is foam in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and 0.02 global warming potential (GWP).
- Interior - attractive, black aluminum interior liner with stainless steel floor.
- Frame rail fitted with leg levelers.

DOOR

- Self closing door. Positive seal, torsion type closure system.
- The door features an integrated LED handle indicator for a sleek, modern appearance.
- "Low-E", double pane thermal insulated glass door assembly with mitered plastic channel frame. The latest in energy efficient technology.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.
- Edge door will remain black when an alternative interior or exterior finish is ordered.

SHELVING

- Six (6) adjustable, black, heavy duty PVC coated wire shelves 22 1/32" L x 23 1/4" D (571mm x 591mm). Four (4) shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on 1/2" (13mm) increments.

LIGHTING

- LED interior lighting, safety shielded.

ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.




115/60/1
NEMA-5-15R

OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply.

- ☐ White exterior.
- ☐ Stainless steel exterior.
- ☐ White aluminum interior liner with white shelving.
- ☐ Stainless steel interior liner.
- ☐ 2½" (64 mm) diameter castors.
- ☐ 4" (102 mm) diameter castors.
- ☐ 6" (152 mm) diameter castors.
- ☐ 6" (152 mm) legs.
- ☐ 6" (152 mm) seismic flanged legs
- ☐ Red wine thermostat.
- ☐ White wine thermostat.
- ☐ Chocolate thermostat.
- ☐ Additional shelves.
- ☐ TrueFlex gravity feed organizers.
- ☐ Pricing strips.
- ☐ Left door hinging available.

PLAN VIEW

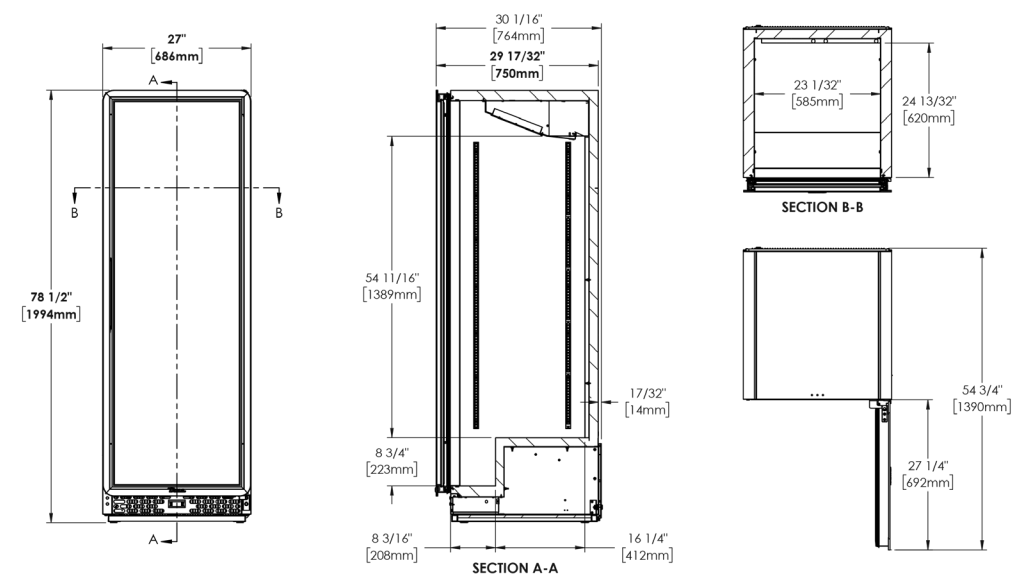

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE
WITHOUT NOTICE



Model	Elevation	Right	Plan	3D	Back
CVM-24-HC~EGC01					

TRUE MANUFACTURING CO., INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truefmfg.com