HEATED HOLDING



VHP7 HOLDING & TRANSPORT CABINET



Model VHP7





SPECIFICATIONS

Vulcan Model VHP7 heated holding and transport cabinets with a narrow footprint designed specifically to hold 7 each 12" x 20" x 2½" pans on fixed racking. Blower motor for gentle and even temperature distribution. Control panel containing indicator light, thermometer, and full range thermostat for temperatures up to 190°F (88°C). Cabinet interior and exterior are both constructed out of 20 gauge stainless steel. Recessed side-mounted lift handles, magnetic action door latch, and full insulation; 1½" in side walls and 2" in top. Integrated steel frame for maximum strength. Field reversible doors. One year limited parts and labor warranty. After the first year, 10-year parts warranty on the heating elements. Complete with top mounted cord, cord wrap, and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts. 120 volts, 1500 watts, 12.5 amps.

UL Listed to Canadian safety standards. Classified by UL to NSF Std. #4

☐ VHP7 Holding & Transport Cabinet

STANDARD FEATURES

- Holding and Transport Capacity Narrow footprint designed specifically to hold 7 each 12" x 20" x 2½" pans on fixed racking.
- Blower motor for gentle and even temperature distribution.
- Recessed side mounted lift handles.
- Indicator lights.
- Thermometer.
- Full range thermostat for temperatures up to 190°F (88°C).
- Interior and exterior are both constructed out of 20 gauge stainless steel.
- Fully insulated with $1\frac{1}{2}$ in side walls and 2" in top.
- Integrated steel frame for maximum strength.
- Magnetic action door latches.
- Field reversible doors.
- One year limited parts and labor warranty. After the first year, 10-year parts warranty on the heating elements.
- Top mounted cord.
- Cord wrap.
- Complete with cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts.
- 120 volts, 1500 watts, 12.5 amps.


OPTIONS

- ☐ 208/240 volts
- ☐ Humidity pan
- ☐ Full perimeter bumper





VHP7 HOLDING & TRANSPORT CABINET

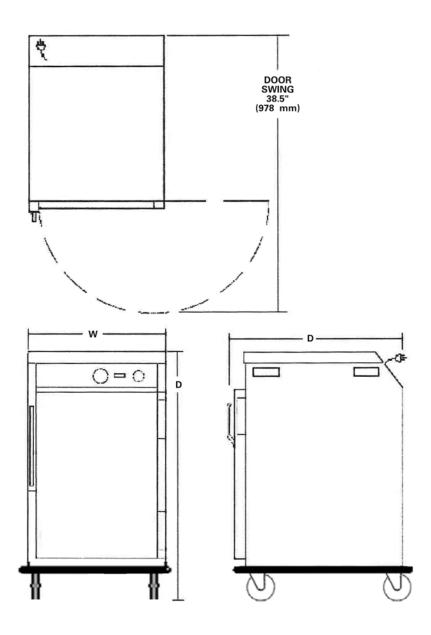

MODEL	CAPACITY 12" x 20" x2½"	HIGH	DEEP	WIDE	SHIPPING WEIGHT	VOLTS	WATTS	AMPS
VHP7	7	36.75" 933 mm	26.75" 679 mm	17.25" 438 mm	140 lbs. 64 kg	120	1500	12.5



a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

