

HORIZONTAL OPEN DISPLAY CASES - SLIM LINE

TOP DISPLAY DRY CASES (OPTIONAL)

NO PLUMBING REQUIRED



TOM-30SB



TOM-75S



TOM-50SB



TOM-40S



TOM-60SB

FEATURES & BENEFITS

■ MODERN DESIGN

By harmonizing curvature and rigidity, our modern style product designs are user-friendly while maintaining the highest product visibility and aesthetics.

■ DESIGNED TO OPTIMIZE IMPULSE SALES

Ideal for eye-catching displays and convenient access with fast service in high traffic area.

■ ENVIRONMENTALLY FRIENDLY, EFFICIENT REFRIGERATION SYSTEM

Turbo Air's refrigerators are designed with oversized and balanced environmentally friendly R-134A (CFC Free) refrigeration. These include large evaporators and condensers for faster cooling and balanced temperature throughout the cabinet.

■ ATTRACTIVE GLASS SIDED ELEGANT EURO DESIGN

Glass front shield and side walls optimize the merchandiser's display effects of fresh salads, sandwiches, desserts and beverages. Its elegant contemporary euro design will enhance any store application.

■ NON-PEEL, DURABLE ANTI-RUST COATING ON THE EXTERIOR REDUCES FINGERPRINTS

■ TOP DISPLAY DRY CASES (TOMD-H) AVAILABLE IN ALL SIZES (OPTIONAL)

■ 300 SERIES STAINLESS STEEL INTERIOR STANDARD INCLUDING BACK WALL, SHELVES AND DECK PANS

■ PERFORATED INTERIOR BACK WALL AND TOP FOR IMPROVED AIR FLOW

■ STANDARD BACK-GUARD IMPROVES AIRFLOW

■ FOAMED WITH POLYURETHANE, HIGH-DENSITY CELL INSULATION (CFC FREE)

■ WHITE AND BLACK COLOR COME STANDARD

■ RECOMMENDED OPERATING CONDITIONS

TOM models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% respectively. Units should not be installed near HVAC vents, fans or doorways that will disrupt the air curtain and compromise the function of the cabinet. Air curtain models will run most efficiently when completely loaded with product.

Model	CU./FT.	# of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D x H (inches)
TOM-30S(B)	4.6	3	1/3	7.5	338	28 x 34 ⁵ / ₈ x 41 ¹ / ₂
TOM-40S(B)	6.6	3	1/2	11	440	39 x 34 ⁵ / ₈ x 41 ¹ / ₂
TOM-50S(B)	8.7	3	1/2	11	481	50 ³ / ₄ x 34 ⁵ / ₈ x 41 ¹ / ₂
TOM-60S(B)	10.9	3	3/4	15.5	535	63 ¹ / ₄ x 34 ⁵ / ₈ x 41 ¹ / ₂
TOM-75S(B)	13.2	3	3/4	15.5	680	75 ⁵ / ₈ x 34 ⁵ / ₈ x 41 ¹ / ₂
TOMD-30-H	2.1	1	N/A	N/A	53	28 x 12 ¹ / ₄ x 17 ³ / ₄
TOMD-40-H	3	1	N/A	N/A	70	39 x 12 ¹ / ₄ x 17 ³ / ₄
TOMD-50-H	4	1	N/A	N/A	87	50 ³ / ₄ x 12 ¹ / ₄ x 17 ³ / ₄
TOMD-60-H	5	1	N/A	N/A	110	63 ¹ / ₄ x 12 ¹ / ₄ x 17 ³ / ₄
TOMD-75-H	6.1	2	N/A	N/A	128	75 ⁵ / ₈ x 12 ¹ / ₄ x 17 ³ / ₄

TOM-S/TOMD-H MODELS SPECIFICATIONS


ELECTRICAL DATA	TOM-30S(B)	TOM-40S(B)	TOM-50S(B)	TOM-60S(B)	TOM-75S(B)
Voltage	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
Plug Type	Ⓜ NEMA-5-15P	Ⓜ NEMA-5-15P	Ⓜ NEMA-5-15P	Ⓜ NEMA-5-20P	Ⓜ NEMA-5-20P
Full Load Amperes	7.5	11	11	15.5	15.5
Compressor HP	1/3	1/2	1/2	3/4	3/4
Refrigerant	R-134A	R-134A	R-134A	R-134A	R-134A
DIMENSIONAL DATA					
Net Capacity cu. ft.	4.6	6.6	8.7	10.9	13.2
Ext. Length Overall in.	28 (711mm)	39 (991mm)	50 ³ / ₄ (1289mm)	63 ¹ / ₄ (1607mm)	75 ⁵ / ₈ (1920mm)
Ext. Depth Overall in.	34 ⁵ / ₈ (880mm)	34 ⁵ / ₈ (880mm)	34 ⁵ / ₈ (880mm)	34 ⁵ / ₈ (880mm)	34 ⁵ / ₈ (880mm)
Ext. Height Overall in.	41 ¹ / ₂ (1054mm)	41 ¹ / ₂ (1054mm)	41 ¹ / ₂ (1054mm)	41 ¹ / ₂ (1054mm)	41 ¹ / ₂ (1054mm)
Int. Length Overall in.	25 ¹ / ₂ (648mm)	36 ⁵ / ₈ (931mm)	48 ³ / ₈ (1229mm)	60 ³ / ₄ (1543mm)	73 ¹ / ₂ (1867mm)
Int. Depth Overall in.	24 (610mm)	24 (610mm)	24 (610mm)	24 (610mm)	24 (610mm)
Int. Height Overall in.	13 (330mm)	13 (330mm)	13 (330mm)	13 (330mm)	13 (330mm)
Gross Weight lbs.	338	440	481	535	680
Net Weight lbs.	255	313	370	440	498
# of Shelves	3	3	3	3	3
Self Size (Top)	25 ¹ / ₂ x 7 x 2 ¹ / ₂	36 ¹ / ₂ x 7 x 2 ¹ / ₂	48 ¹ / ₄ x 7 x 2 ¹ / ₂	60 ³ / ₄ x 7 x 2 ¹ / ₂	73 ¹ / ₈ x 7 x 2 ¹ / ₂
Self Size (Middle)	25 ¹ / ₂ x 14 ¹ / ₈ x 3 ¹ / ₄	36 ¹ / ₂ x 14 ¹ / ₈ x 3 ¹ / ₄	48 ¹ / ₄ x 14 ¹ / ₈ x 3 ¹ / ₄	60 ³ / ₄ x 14 ¹ / ₈ x 3 ¹ / ₄	73 ¹ / ₈ x 14 ¹ / ₈ x 3 ¹ / ₄
Self Size (Low)	25 ¹ / ₂ x 9 ³ / ₄ x 3 ¹ / ₄	36 ¹ / ₂ x 9 ³ / ₄ x 3 ¹ / ₄	48 ¹ / ₄ x 9 ³ / ₄ x 3 ¹ / ₄	60 ³ / ₄ x 9 ³ / ₄ x 3 ¹ / ₄	73 ¹ / ₈ x 9 ³ / ₄ x 3 ¹ / ₄

	TOMD-30-H	TOMD-40-H	TOMD-50-H	TOMD-60-H	TOMD-75-H
Ext. Dimension (L x D x H)	28 x 12 ¹ / ₄ x 17 ¹ / ₄	39 x 12 ¹ / ₄ x 17 ¹ / ₄	50 ³ / ₄ x 12 ¹ / ₄ x 17 ¹ / ₄	63 ¹ / ₄ x 12 ¹ / ₄ x 17 ¹ / ₄	75 ⁵ / ₈ x 12 ¹ / ₄ x 17 ¹ / ₄
Int. Dimension (L x D x H)	25 ¹ / ₂ x 9 ¹ / ₈ x 15 ⁷ / ₈	36 ⁵ / ₈ x 9 ¹ / ₈ x 15 ⁷ / ₈	48 ³ / ₈ x 9 ¹ / ₈ x 15 ⁷ / ₈	60 ³ / ₄ x 9 ¹ / ₈ x 15 ⁷ / ₈	73 ¹ / ₄ x 9 ¹ / ₈ x 15 ⁷ / ₈
Cu. ft	2.1	3	4	5	6.1
# of Shelves	1	1	1	1	2
Shelf size	25 ¹ / ₂ x 7	36 ¹ / ₂ x 7	48 ¹ / ₄ x 7	60 ³ / ₄ x 7	36 ¹ / ₂ x 7
Crated Weight lbs.	53	70	87	110	128


Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.


- **WARRANTY :** 1 Year Parts and Labor Warranty
Additional 4 Year Warranty on Compressor
- **SIMPLE PLUG-IN INSTALLATION**
- **PATENTED SELF-CONTAINED SYSTEM, NO PLUMBING REQUIRED**

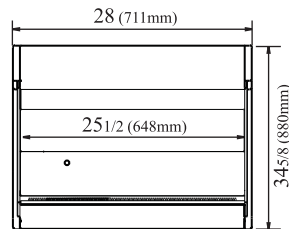

TOM-30S(B)
TOP VIEW

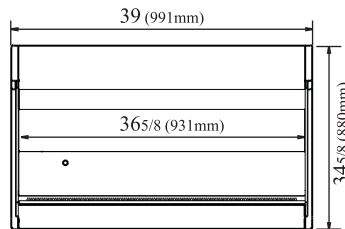


TOM-40S(B)
TOP VIEW

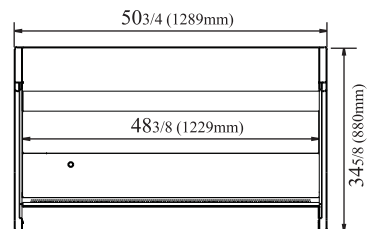


TOM-50S(B)
TOP VIEW

(unit : inch)


PLAN VIEW

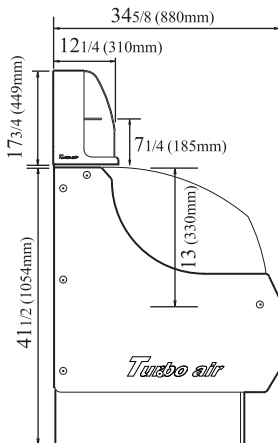

TOM-S w/ TOMD-H SIDE VIEW

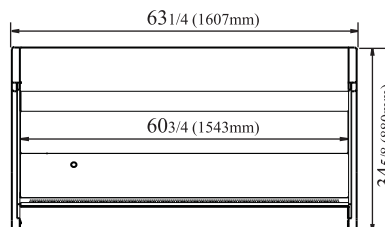

TOM-60S(B)
TOP VIEW

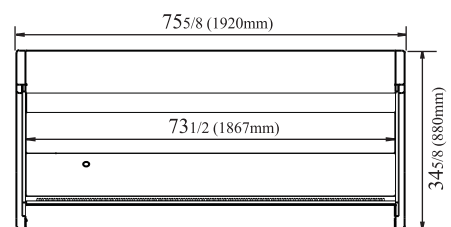

TOM-75S(B)
TOP VIEW