



Outperform every day.™

**Project:**

**Item Number:**

**Quantity:**

Hot Drop-ins with Dry Wells

The Vollrath Company, L.L.C.

## HOT DROP-INS WITH DRY WELLS



### DESCRIPTION

Vollrath's waterless hot drop-ins wells meet NSF4 standards without water. They are designed for top-mount installation and do not require hard-wiring.

### SHORT DESCRIPTION

Hot-drop-in designed to run without water, flange and full-size wells are 300 series stainless steel, insulated on all non-exposed sides, cord with plug, stainless steel remote control panel, mounting clips

**Note:** Orders for drop-ins cannot be canceled or returned.

### WARRANTY

All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to [www.Vollrath.com](http://www.Vollrath.com).

### Agency Listings



Item No.	No. of Wells	Watts per Well	Voltage	Control
FC-4DH-01120-I	One	1000	120	Infinite
FC-4DH-01208-I		750-1000	208-240	Thermostatic
FC-4DH-01120-T		1000	120	
FC-4DH-01208-T	Two	750-1000	208-240	Infinite
FC-4DH-02120-I		1000	120	Thermostatic
FC-4DH-02208-I		750-1000	208-240	
FC-4DH-02120-T	Three	1000	120	Infinite
FC-4DH-02208-T		750-1000	208-240	Thermostatic
FC-4DH-03120-I		1000	120	
FC-4DH-03208-I	Four	750-1000	208-240	Infinite
FC-4DH-03120-T		1000	120	Thermostatic
FC-4DH-03208-T		750-1000	208-240	
FC-4DH-04208-I	Five	750-1000	208-240	Infinite
FC-4DH-04208-T		750-1000	208-240	Thermostatic
FC-4DH-05208-I		750-1000	208-240	
FC-4DH-05208-T	Six	750-1000	208-240	Infinite
FC-4DH-06208-I				Thermostatic

### FEATURES

- Top flange and drawn well are 300 series stainless steel
- Stainless steel shroud covers exposed moisture resistant element
- Includes gasket
- Insulated on all sides, including between each well
- Includes 6' (1.8 m) cord with plug. Does not require hard-wiring
- Stainless steel control panel with individual controls and power indicator light for each well
- Control panel has 4' (121.9 cm) tethered connection for flexible mounting locations
- Includes standard mounting clips for use on counters up to 3" (7.6 cm) thick for easy installation
- Accepts full-size and fractional pans up to 6" (15.2 cm) deep
- Adapter bars are recommended when using fractional pans
- Not for use with plastic pans.

### ACCESSORIES

- ☐ Sheet pan adapter available. Item No. 19186.

### CLEARANCE AND ENVIRONMENT REQUIREMENTS

- Zero-clearance installation
- Indoor use only. Room temperature and HVAC can effect performance temperatures

Due to continued product improvement, please consult [www.vollrath.com](http://www.vollrath.com) for current product specifications.

Approvals	Date



Outperform every day.™


[www.vollrath.com](http://www.vollrath.com)

The Vollrath Company, L.L.C.  
1236 North 18th Street  
Sheboygan, WI 53081-3201 U.S.A.  
Customer Service: 800.628.0830  
Canada Customer Service: 800.695.8560  
Main Fax: 800.752.5620 or 920.459.6573


Technical Services: 800.628.0832  
Technical Services Fax: 920.459.5462

## HOT DROP-INS WITH DRY WELLS


## DIMENSIONS (Shown in inches (cm))

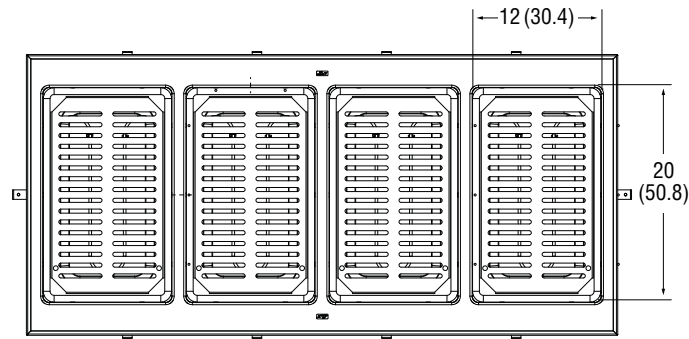

Top View

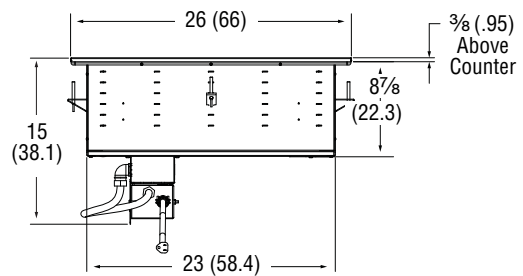


Side View

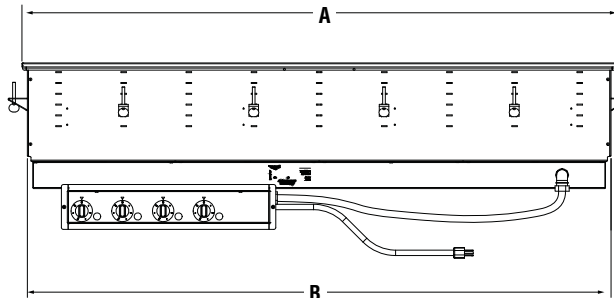


Operator View

Standard  
Mounting  
Clips

Control Panel

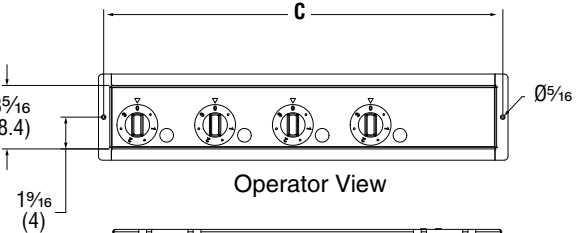

Operator View



Top View

## SPECIFICATIONS

Item Numbers	No. of Wells	Control	Dimensions					Electrical			
			Drop-in			Control Box		Voltage	Amps	Watts per Well	NEMA PLUG
			(A)	(B)	Cutout	(C)	Cutout				
FC-4DH-01120-I	One	Infinite	15 (38.1)	14 (35.6)	14¼ x 25¼ (36.2 x 64.1)	8 (20.3)	7½ x 3⅝ <sub>16</sub> (19.1x 8.4)	120	8.3	1000	5-15P
FC-4DH-01208-I		Thermostatic						208-240	3.6-4.2	750-1000	6-15P
FC-4DH-01120-T								120	8.3	1000	5-15P
FC-4DH-01208-T								208-240	3.6-4.2	750-1000	6-15P
FC-4DH-02120-I	Two	Infinite	28¼ (71.8)	27¼ (69.2)	27½ x 25¼ (69.9 x 64.1)	11¼ (29.8)	11¼ x 3⅝ <sub>16</sub> (28.6x 8.4)	120	16.7	1000	5-30P
FC-4DH-02208-I		Thermostatic						208-240	7.2-8.3	750-1000	6-15P
FC-4DH-02120-T								120	16.7	1000	5-30P
FC-4DH-02208-T								208-240	7.2-8.3	750-1000	6-15P
FC-4DH-03120-I	Three	Infinite	41½ (105.4)	40½ (102.8)	40¾ x 25¼ (103.5 x 64.1)	15½ (39.4)	15 x 3⅝ <sub>16</sub> (38.1x 8.4)	120	25.0	1000	5-50P
FC-4DH-03208-I		Thermostatic						208-240	10.8-12.5	750-1000	6-20P
FC-4DH-03120-T								120	25.0	1000	5-50P
FC-4DH-03208-T								208-240	10.8-12.5	750-1000	6-20P
FC-4DH-04208-I	Four	Infinite	54¾ (139)	53¾ (136.5)	54 x 25¼ (137.2 x 64.1)	19¼ (48.9)	18¾ x 3⅝ <sub>16</sub> (47.6x 8.4)	208-240	14.4-16.7	750-1000	6-30P
FC-4DH-04208-T		Thermostatic									
FC-4DH-05208-I	Five	Infinite	68 (172.7)	67 (170.2)	67¼ x 25¼ (170.8 x 64.1)	23 (58.4)	22½ x 3⅝ <sub>16</sub> (56.4x 8.4)	208-240	18.0-20.8	750-1000	6-30P
FC-4DH-05208-T		Thermostatic									
FC-4DH-06208-I	Six	Infinite	81¼ (206.4)	80¼ (203.8)	80½ x 25¼ (204.5 x 64.1)	26¾ (67.9)	26¼ x 3⅝ <sub>16</sub> (66.7 x 8.4)	208-240	21.6-25	750-1000	6-50P
FC-4DH-06208-T		Thermostatic									

Notice: Do NOT modify the cord or plug on the drop-in. Modification may damage the drop-in or cause injury, and will void the warranty.

Straight Blade  
Receptacles

120V  NEMA 5-15R	208-240V  NEMA 6-15R
120V  NEMA 5-30R	120V  NEMA 5-50R
208-240V  NEMA 6-20R	208-240V  NEMA 6-30R
120V  NEMA 5-50R	



Outperform every day.™

[www.vollrath.com](http://www.vollrath.com)

The Vollrath Company, L.L.C.  
1236 North 18th Street  
Sheboygan, WI 53081-3201 U.S.A.  
Customer Service: 800.628.0830  
Canada Customer Service: 800.695.8560  
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832  
Technical Services Fax: 920.459.5462