



Project:

Item Number:

Quantity:

Induction Range: Heavy-Duty Countertop

The Vollrath Company, L.L.C.

INDUCTION RANGE: HEAVY-DUTY COUNTERTOP



Model 69504/69520



Model 69507/69522

Induction Ranges: Intrigue™ Heavy-Duty
Ultra and Professional Series

DESCRIPTION

These high-efficiency, heavy-duty commercial countertop induction ranges are designed for use in commercial kitchens and front-of-the-house cooking. They provide sensitive low-end control for cooking sauces, milks and chocolates as well as fast, high temperature cooking.

The induction ranges come complete with a 6 ft. (182.8 cm) power cord and plug. The case is made from 18-gauge 304 stainless steel with a vitro ceramic top. The ceramic top is easily cleaned with a mild cleaner.

The induction range is equipped with a variety of safety features including:

- ☐ Over-heat protection
- ☐ Small-article detection
- ☐ Pan auto-detection function
- ☐ Empty-pan shut-off

Agency Listings



This device
complies
with Part 18
FCC Rules.

MODELS:	69504	3.0 kW/3.5 kW @ 208V/240V
	69507	6.0 kW/7.0 kW @ 208V/240V (Dual Hob 3.0/3.5 kW per Hob)
	69520	2.5 kW/2.9 kW @ 208/240V
	69522	5.0 kW/5.8 kW @ 208/240V (Dual Hob 2.5/2.9 kW per Hob)

FEATURES

- ☐ Multi-sensor solid-state controls with digital display.
- ☐ Firewall control protection.
- ☐ Dual commercial high-flow fans for extra durability.
- ☐ High performance with smooth power control from 1% to 100% of output power.
- ☐ High energy efficiency of 90%+ from power source to pan.
- ☐ Sloped control panel for runoff of liquid spills.
- ☐ Push button controls for easy cleaning.
- ☐ Heating function for adjustable power settings.
- ☐ Rubber feet to prevent slipping of appliance.
- ☐ Unit comes with cord and plug and does not require hard wiring.
- ☐ Full two-year parts and labor warranty.
- ☐ Timer function on 69520 and 69522.

IMPORTANT

- ☐ This appliance is intended for use with induction-ready cookware.
- ☐ All models require adequate unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- ☐ Countertop models require a minimum clearance of 3" (7.62 cm) at the rear and 1" (2.5 cm) at the bottom.

Approvals

Date:



Setting
the Standard™

www.vollrathco.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201
U.S.A.
Main Tel: 800.628-0830
Service Tel: 800.628.0832
FAX: 800.752.5620

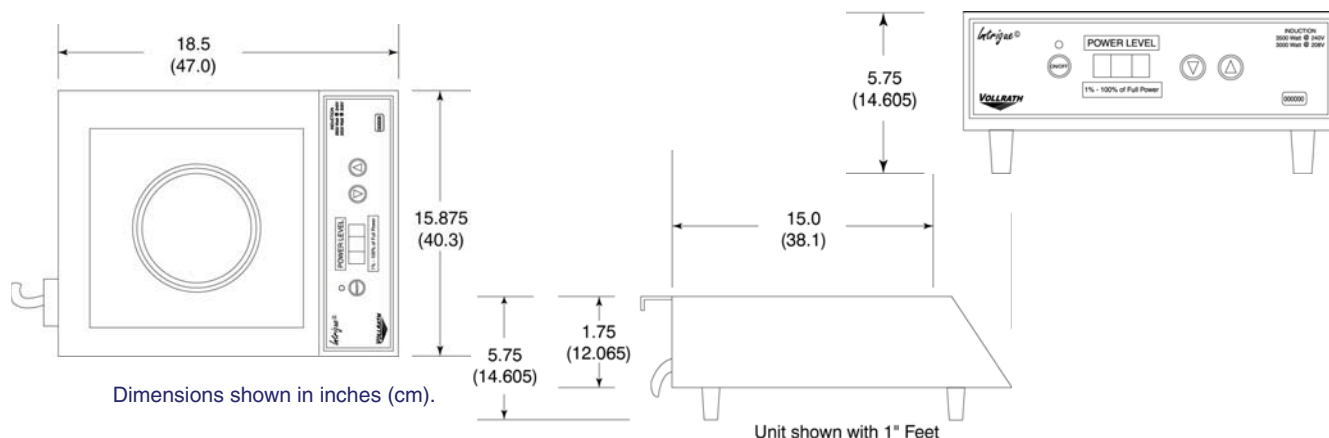
Vollrath of Canada, Co
Tel: 800.695.8560
FAX: 800.752.5620

INDUCTION RANGE: HEAVY-DUTY COUNTERTOP

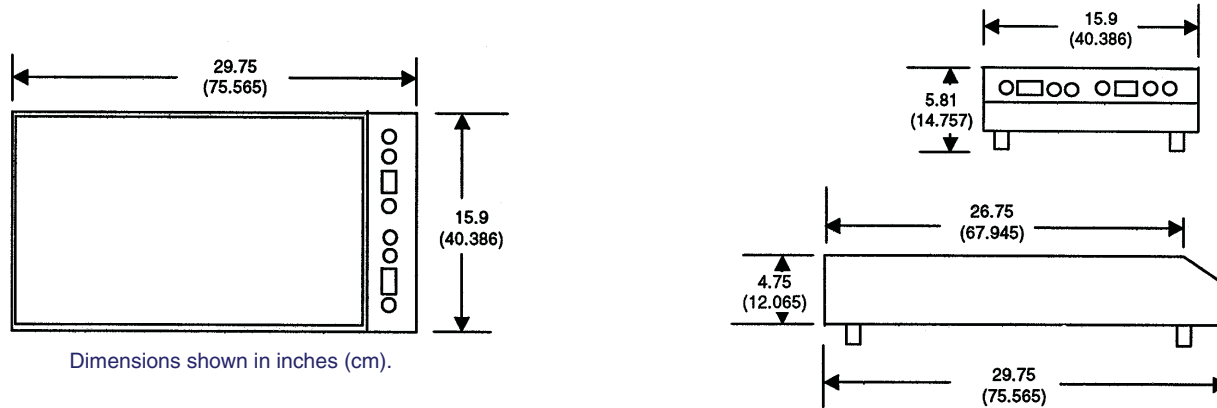
MODELS:	69504	3.0 kW/3.5 kW, @ 208V/240V
	69507	6.0 kW/7.0 kW @ 208V/240V (Dual Hob 3.0/3.5 kW per Hob)
	69520	2.5 kW/2.9 kW @ 208/240V
	69522	5.0 kW/5.8 kW @ 208/240V (Dual Hob 2.5/2.9 kW per Hob)

69504 AND 69520 DIMENSIONS

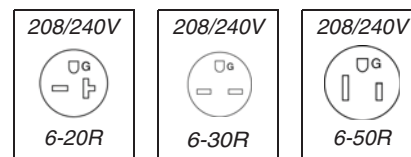
- Maximum pan size: 14" (35.6 cm)
- Overall dimension: 15.875" wide x 18.5" deep x 5.75" high (40.3 cm x 47.0 cm x 14.805 cm)
- Shipping container dimension: 19.0" wide x 24.0" deep x 9.0" high (48.26 cm x 60.96 cm x 22.86 cm)
- Shipping Weight: 26 pounds (11.7 kg)

**69507 AND 69522 DIMENSIONS**

- Maximum pan size: 12" (30.5 cm)
- Overall dimension: 15.9" wide x 29.75" deep x 5.81" high (40.39 cm x 75.57x 14.76 cm)
- Shipping container dimension: 21.0" wide x 35.0" deep x 9.0" high (53.34 cm x 88.9 cm x 22.86 cm)
- Shipping Weight: 44 Pounds (19.96 kg)

**ELECTRICAL SPECIFICATIONS - 1 PHASE, 60 HZ**

Model	kW Rating	Volts	Nominal Amps	NEMA Plug	Remarks
69504	3.0 kW 3.5 kW	208V AC 240V AC	14.6	6-20P	
69507	6.0 kW 7.0 kW	208V AC 240V AC	29.2	6-50P	3.0 kW per Hob 3.5 kW per Hob
69520	2.5 kW 2.9 kW	208V AC 240V AC	12.1	6-20P	
69522	5.0 kW 5.8 kW	208V AC 240V AC	24.1	6-30P	2.5 kW per Hob 2.9 kW per Hob

Receptacles

www.vollrathco.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201
U.S.A.
Main Tel: 800.628-0830
Service Tel: 800.628.0832
FAX: 800.752.5620

Vollrath of Canada, Co
Tel: 800.695.8560
FAX: 800.752.5620