

G-24 GRIDDLE

G-24 GRIDDLE



G-24

Wells G-24 Griddle is ideal for any commercial kitchen based on its versatile, easy-to-use design. In addition to the standard griddle surface there are two options to choose from, grooved or chrome-plated. The four positive-off thermostats allow individual zone control.

Specifications

Overall Dimensions:	Inches	MM
Width	49	1,245
Depth	29 9/16	751
Height	16	406
(incl. 4" legs & splashguard)		
Grid Surface Dimensions:		
Width	46 7/8	1,191
Depth	24 5/16	618
Area	1140 in ²	.73 m ²
Temperature Range:	Fahrenheit	Celsius
G-24	200° to 450°	93° to 232°
Number of Thermostats:	4	
Pre-Heat Time to 400° F:	9 minutes	
Watts Per Hour to Maintain 400° F:	2,900	
Typical Production:	Per Load	Per Hour
Hamburgers	86	1,450
Steaks	32	400
Pancakes*	66	950
Eggs*	70	1,190
* Not applicable to grooved surface		
Weights:	Lbs.	KG
Installed	244	111
Shipping	326	148

Export

The following models are available for export and meet the standards for CE:

- **G-24EU**, 380-415V, 3NAC, 21000 watts
- **PG-24EU**, chrome plated, 380-415V, 3NAC, 21000 watts

Features

- **Each individual thermostat** controls an eleven and one half-inch wide cooking surface.
- **Enclosed tubular elements** are clamped onto the griddle plate to provide even heat distribution over the entire surface.
- **Removable splashguard** makes clean up easier.
- **The removable front grease drawer** has a four-quart capacity.
- **Controls** are mounted with a protective guard ring to help prevent accidental temperature changes.
- Each unit is provided with **4" adjustable legs**.
- **A terminal block** is provided for field connection to the main power supply.
- **The G-24 Griddle** is Underwriters Laboratories, Inc. LISTED and meets NSF International and Canadian standards.
- **A one-year warranty** against defects covers parts and labor.

Accessories / Options

Chrome-plated griddle surface, allows more efficient heat transfer throughout the cooking area, available by special order


Grooved griddle surface, 3/4-inch thick ribbed steel plate that allows for the "branding" of meat products, available by special order






MODEL G-24 GRIDDLE

DIMENSIONS:

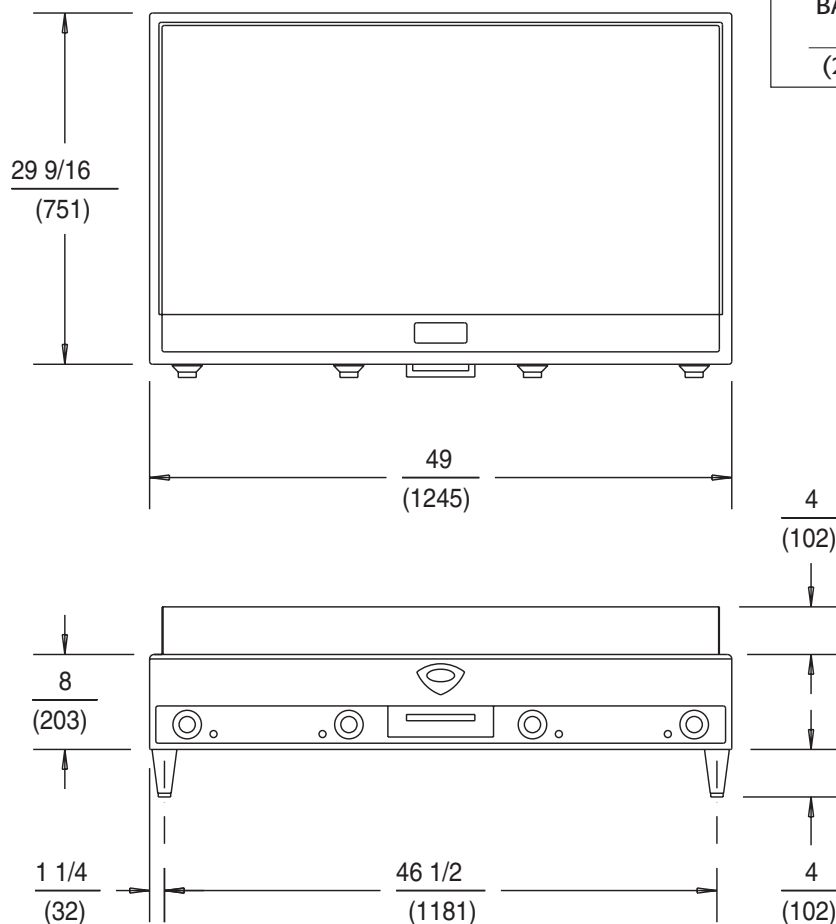

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE		
BACK	SIDE	BOTTOM
$\frac{1}{1}$ (25)	$\frac{1}{1}$ (25)	$\frac{4}{4}$ (102)

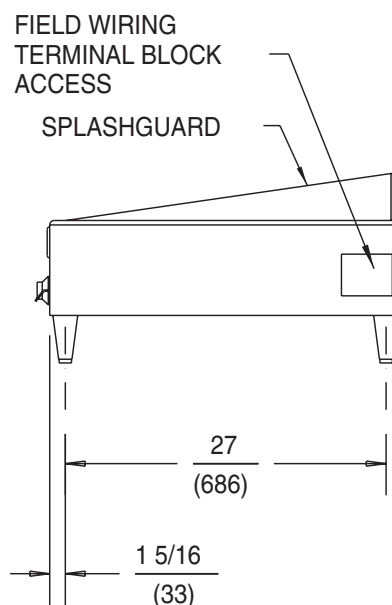

G-24 ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS PER LINE PHASE 3				AMPS SINGLE PHASE	POWER SUPPLY CORD
			L1	L2	L3	N		
G-24	208	21500	63.4	67.1	45.8	—	103.3	NONE
G-24	240	21500	55.0	58.3	39.6	—	89.5	NONE
G-24	480	21500	27.1	28.9	19.9	—	43.8	NONE
G-24EU 380-415		21000	20.8	41.7	25.0	50.6	—	NONE

Denotes export (EU) products.

NOTE: Specifications are subject to change without notice.

