


COLD WATER MOBILE TRAILER

HONDA® GX390 ENGINE

Equipped with low oil shutdown feature with recoil & key -start

12" PREMIUM 6-PLY TIRES **FRAME** For increased mobility Welded steel frame across various terrains

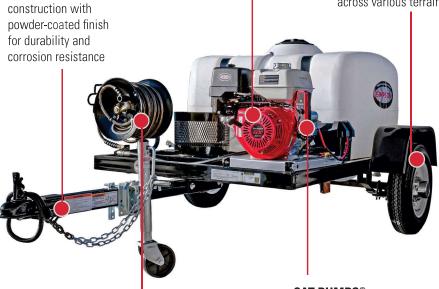

100' DUAL BRAIDED HIGH **PRESSURE HOSE**

Non-marring, flexible, kink and abrasion resistant with QC fittings and polyurethane outer jacket

CAT PUMPS® INDUSTRIAL TRIPLEX

With external unloader and bypass hose

PART# 95003

PRESSURE RATING: 4200 PSI

FLOW RATING: 4.0 GPM

ENGINE: HONDA® GX390 Recoil & Key-Start SHUTDOWN

LOW OIL

PUMP: CAT PUMPS® Industrial Triplex

TRAILER SIZE: 9' Overall (4'x 5'6" Platform)

TRAILER FRAME: Rectangular think wall steel tubing

AXLE RATING: 2000 lbs

TIRE: 5.30" - 12"

LIGHTING: LED

TRAILER HITCH BALL SIZE: 2" ball

WATER TANK SIZE: 150 gal

HIGH PRESSURE HOSE: 3/8" x 100' Monster Hose

HIGH PRESSURE HOSE REEL: 100'

SUPPLY HOSE: N/A

SUPPLY REEL: N/A

DIMENSIONS / WEIGHT: L:80" x W:52" x H:72" | 630 lbs.

LIMITED PRODUCT WARRANTIES



5 YEAR PUMP WARRANTY









NOT FOR SALE IN CALIFORNIA